

BREWERY HOSES AND ACCESSORIES



ORLANDO

4105 Seaboard Rd.
Orlando, FL 32808
(407) 843-8190
(800) 506-5514
Fax: (407) 422-5577

OrlandoSales@AmazonHose.com

SOUTH ORLANDO

9961 Sidney Hayes Rd.
Orlando, FL 32824
(407) 843-8190
(800) 506-5514
Fax: (407) 422-5577

OrlandoHSCSales@AmazonHose.com

TAMPA

1103 N. 50th St.
Tampa, FL 33619
(813) 223-7554
(800) 664-9490
Fax: (813) 223-7567

TampaSales@AmazonHose.com

MIAMI


1001 N.W. 159th Dr.
Miami Gardens, FL 33169
(305) 620-4313
(800) 731-0025
Fax: (305) 356-7308

MiamiSales@AmazonHose.com

TABLE OF CONTENTS

BREWERY & WINERY HOSE.....	1-5
• Purple Snake	
• Purple Snake with Crimped Sanitary Tri-Clamp Ends (Assembly)	
• Vintner	
• Vintner with Crimped Sanitary Tri-Clamp Ends (Assembly)	
• ExtremeFlex Easy Clean	
• ExtremeFlex Easy Clean with Crimped Sanitary Tri-Clamp Ends (Assembly)	
• NovaBrew	
• NovaBrew with Crimped Sanitary Tri-Clamp Ends (Assembly)	
• Plicord Brewline	
• Plicord Brewline with Crimped Sanitary Tri-Clamp Ends (Assembly)	
CLEAR PVC TUBING.....	6
• Clear Tubing Unreinforced	
PVC LIQUID SUCTION HOSE.....	7
• PVC Food and Beverage	
PVC DISCHARGE HOSE.....	7
• Clearbraided K3150 Series RF Standard Wall PVC Food and Beverage Hose	
WORM GEAR CLAMPS.....	8
• Series 9/16" Hy-Gear 63-4 - Packaging 10 Clamps per box	
T-BOLT CLAMPS.....	8
• T-Bolt Clamps - Style STBC	
TRI-CLAMPS.....	8
• Single Pin Heavy Duty Clamps - with Cross Hole Wing Nut	
TRI-CLAMP GASKETS.....	9
• PTFE, Silicone and Buna-N Clamp Gaskets - White	
SANITARY METAL ADAPTERS.....	9
• Rubber Hose Adapters	
• Tygon® Hose Adapters	
SANITARY METAL FITTINGS.....	10-13
• 90° Elbows	
• 45° Elbows	
• Concentric Reducers	
• Eccentric Reducers	
• Tees	
• Solid End Caps	
• Sanitary Clamp End Check Valves - 316 Stainless Steel	
• Sanitary Sight Glass - 316 Stainless Steel	
SANITARY TRI-CLAMP VALVES.....	14-15
• Ball Valves	
• Butterfly Valves	
SUPERKLEAN NOZZLES.....	16
• Standard Spray Nozzles 150 Series	
• DuraFlow Spray Nozzles	
SUPERKLEAN NOZZLE ADAPTERS.....	17
• Ball Type Swivel Adapters 8-B Series	
• Standard Swivel Adapters 8 Series	
• Garden Hose Adapters	
WASHDOWN HOSE.....	18-19
• Frontier	
• Sani-Wash Plus 300	
• Blue Fortress	
SUPERKLEAN MIXING STATIONS.....	19

SHOP NOW



Order Online
at Shop.AmazonHose.com

BREWERY HOSE

Purple Snake



Application: A high quality hose that is ideal for breweries, winepresses, bottlers and many other installations in the brewing, beverage and spirits industry. Suitable for pure alcohol up to 98%.

Tube: White, EPDM, non-porous and high-performing special lining, absolutely neutral to taste and odor. FDA compliant, and conforms to 3-A Sanitary Standard 18-03. Meets the recommendation XXI of BfR.

Cover: Red EPDM, fabric patterned special cover, resistant to ozone, weather, UV and abrasion.

Reinforcement: Synthetic fibers.

Temperature Range: -22°F up to +203°F (-30°C up to +95°C), can be steamed up to 266°F (+130°C) max. 30 min.

Working Pressure: 232 PSI through 4" ID. up to 16 bar.

Stock Sizes: 1-1/2" and 2". Call Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-PURPLESNAKE 1-1/2	1-1/2" ID
GY-PURPLESNAKE 2	2" ID

Purple Snake with Crimped Sanitary Tri-Clamp Ends (Assembly)



Contact Amazon Hose for pricing and availability on additional sizes and specifications.

Rubber Bumpers, *pictured above in blue*, are available as an additional item!

PART #	SIZE X LENGTH IN FT.
GY-PURPLESNAKE-1-1/2X10TC	1-1/2" X 10 FT.
GY-PURPLESNAKE-1-1/2X15TC	1-1/2" X 15 FT.
GY-PURPLESNAKE-1-1/2X20TC	1-1/2" X 20 FT.
GY-PURPLESNAKE-1-1/2X25TC	1-1/2" X 25 FT.
GY-PURPLESNAKE-1-1/2X50TC	1-1/2" X 50 FT.
GY-PURPLESNAKE-2X10TC	2" X 10 FT.
GY-PURPLESNAKE-2X15TC	2" X 15 FT.
GY-PURPLESNAKE-2X20TC	2" X 20 FT.
GY-PURPLESNAKE-2X25TC	2" X 25 FT.
GY-PURPLESNAKE-2X50TC	2" X 50 FT.

BREWERY & WINERY HOSE

Vintner



Application: For handling in-plant and/or tank truck transfer of wine, beer, potable water and other non-oily, liquid food stuffs.

Temperature Range: -30°F to 220°F (-34°C to 104°C).

Working Pressure: 250 PSI through 2" ID.

Stock Sizes (ID): 1", 1-1/2" and 2". Call Amazon Hose for additional sizes and availability.

Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03).

Reinforcement: Spiral-plied synthetic fabric with monofilament helix.

Cover: Gray EPDM synthetic rubber (wrapped) /purple branding tape.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-VINTNER-1	1" ID
GY-VINTNER-1H	1-1/2" ID
GY-VINTNER-2	2" ID

Vintner with Crimped Sanitary Tri-Clamp Ends (Assembly)



PART #	SIZE X LENGTH IN FT.
GY-VINTNER-1X10TC	1" X 10 FT.
GY-VINTNER-1X15TC	1" X 15 FT.
GY-VINTNER-1X20TC	1" X 20 FT.
GY-VINTNER-1X25TC	1" X 25 FT.
GY-VINTNER-1X50TC	1" X 50 FT.
GY-VINTNER-1HX10TC	1-1/2" X 10 FT.
GY-VINTNER-1HX15TC	1-1/2" X 15 FT.
GY-VINTNER-1HX20TC	1-1/2" X 20 FT.
GY-VINTNER-1HX25TC	1-1/2" X 25 FT.
GY-VINTNER-1HX50TC	1-1/2" X 50 FT.
GY-VINTNER-2X10TC	2" X 10 FT.
GY-VINTNER-2X15TC	2" X 15 FT.
GY-VINTNER-2X20TC	2" X 20 FT.
GY-VINTNER-2X25TC	2" X 25 FT.
GY-VINTNER-2X50TC	2" X 50 FT.

BREWERY HOSE

ExtremeFlex Easy Clean



Application: For beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03).

Cover: New Corrugated Red EZ Clean UHMWPE cover (semi-smooth finish).

Reinforcement: Spiral-plyed fabrics with double galvanized helix wire.

Temperature Range: -30° F to 220° F (-34° C to 104° C).


Working Pressure: 2" - 250 PSI and 3" - 200 PSI.

Stock Sizes: 1-1/2", 2" and 3" in red only. Contact Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-EXTREMEFLEX-1H	1-1/2" ID
GY-EXTREMEFLEX-2	2" ID
GY-EXTREMEFLEX-3	3" ID

ExtremeFlex with Crimped Sanitary Tri-Clamp Ends (Assembly)

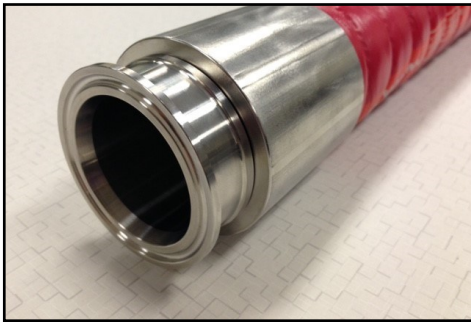

PART #	SIZE X LENGTH IN FT.
GY-EXTREMEFLEXEC-1HX10TC	1-1/2" X 10 FT.
GY-EXTREMEFLEXEC-1HX15TC	1-1/2" X 15 FT.
GY-EXTREMEFLEXEC-1HX20TC	1-1/2" X 20 FT.
GY-EXTREMEFLEXEC-1HX25TC	1-1/2" X 25 FT.
GY-EXTREMEFLEXEC-1HX50TC	1-1/2" X 50 FT.

PART #	SIZE X LENGTH IN FT.
GY-EXTREMEFLEXEC-2X10TC	2" X 10 FT.
GY-EXTREMEFLEXEC-2X15TC	2" X 15 FT.
GY-EXTREMEFLEXEC-2X20TC	2" X 20 FT.
GY-EXTREMEFLEXEC-2X25TC	2" X 25 FT.
GY-EXTREMEFLEXEC-2X50TC	2" X 50 FT.
GY-EXTREMEFLEXEC-3X10TC	3" X 10 FT.
GY-EXTREMEFLEXEC-3X15TC	3" X 15 FT.
GY-EXTREMEFLEXEC-3X20TC	3" X 20 FT.
GY-EXTREMEFLEXEC-3X25TC	3" X 25 FT.
GY-EXTREMEFLEXEC-3X50TC	3" X 50 FT.

BREWERY HOSE

NovaBrew



Novaflex NovaBrew 6507NB is a state of the art designed hose based on the specific requirements of today's modern breweries. NovaBrew™ has a rugged but flexible construction with a smooth white microbe resistant chlorobutyl tube, for non-oily applications, a cover that resists dirt scuffs and is easily cleaned. NovaBrew meets the requirements of FDA, USDA, CFIA and 3-A (Cert#1803).

Tube: White Chlorobutyl (non-oily applications).

Reinforcement: Multiple plies of polyester tire cord, dual monofilament helix rods. Static wire version available on request.

Cover: Dark burgundy EPDM.

Temperature Range: -40°F (-40°C) to 240°F (116°C) Cleaning in Place to 248°F (120°C). Can be open end steam cleaned.

Working Pressure: 250 PSI. Full vacuum rated through 2" ID.

Stock Sizes (ID): 1", 1-1/2" and 2". Call Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
6507NB-0100	1" ID
6507NB-0150	1-1/2" ID
6507NB-0200	2" ID

NovaBrew with Crimped Sanitary Tri-Clamp Ends (Assembly)



PART #	SIZE X LENGTH IN FT.
6507NB-0100X10TC	1" X 10 FT.
6507NB-0100X15TC	1" X 15 FT.
6507NB-0100X20TC	1" X 20 FT.
6507NB-0100X25TC	1" X 25 FT.
6507NB-0100X50TC	1" X 50 FT.
6507NB-0150X10TC	1-1/2" X 10 FT.
6507NB-0150X15TC	1-1/2" X 15 FT.
6507NB-0150X20TC	1-1/2" X 20 FT.
6507NB-0150X25TC	1-1/2" X 25 FT.
6507NB-0150X50TC	1-1/2" X 50 FT.
6507NB-0200X10TC	2" X 10 FT.
6507NB-0200X15TC	2" X 15 FT.
6507NB-0200X20TC	2" X 20 FT.
6507NB-0200X25TC	2" X 25 FT.
6507NB-0200X50TC	2" X 50 FT.

BREWERY HOSE

Plicord Brewline



Application: A quality discharge hose designed specifically for the highly demanding service of transferring non-oily liquid products in wineries and breweries.

Tube: White Chlorobutyl rubber (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03).

Cover: Red EPDM with a white spiral stripe (wrapped impression).

Reinforcement: Spiral-plyed synthetic fabric, 4 plies to 1-1/2" ID, 6 plies over 1-1/2" ID.

Temperature Range: -40°F to 220°F (-40°C to 104°C).

Working Pressure: 250 PSI through 3" ID.

Stock Sizes: 1", 1-1/2", 2" and 3". Contact Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-BREWLINE-1	1" ID
GY-BREWLINE-1H	1-1/2" ID
GY-BREWLINE-2	2" ID
GY-BREWLINE-3	3" ID

Plicord with Crimped Sanitary Tri-Clamp Ends (Assembly)




Contact Amazon Hose for pricing and availability on additional sizes and specifications.

PART #	SIZE X LENGTH IN FT.
GY-BREWLINE-1X10TC	1" X 10 FT.
GY-BREWLINE-1X15TC	1" X 15 FT.
GY-BREWLINE-1X20TC	1" X 20 FT.
GY-BREWLINE-1X25TC	1" X 25 FT.
GY-BREWLINE-1X50TC	1" X 50 FT.
GY-BREWLINE-1HX10TC	1-1/2" X 10 FT.
GY-BREWLINE-1HX15TC	1-1/2" X 15 FT.
GY-BREWLINE-1HX20TC	1-1/2" X 20 FT.
GY-BREWLINE-1HX25TC	1-1/2" X 25 FT.
GY-BREWLINE-1HX50TC	1-1/2" X 50 FT.

PART #	SIZE X LENGTH IN FT.
GY-BREWLINE-2X10TC	2" X 10 FT.
GY-BREWLINE-2X15TC	2" X 15 FT.
GY-BREWLINE-2X20TC	2" X 20 FT.
GY-BREWLINE-2X25TC	2" X 25 FT.
GY-BREWLINE-2X50TC	2" X 50 FT.
GY-BREWLINE-3X10TC	3" X 10 FT.
GY-BREWLINE-3X15TC	3" X 15 FT.
GY-BREWLINE-3X20TC	3" X 20 FT.
GY-BREWLINE-3X25TC	3" X 25 FT.
GY-BREWLINE-3X50TC	3" X 50 FT.

CLEAR PVC TUBING

Clear Tubing Unreinforced

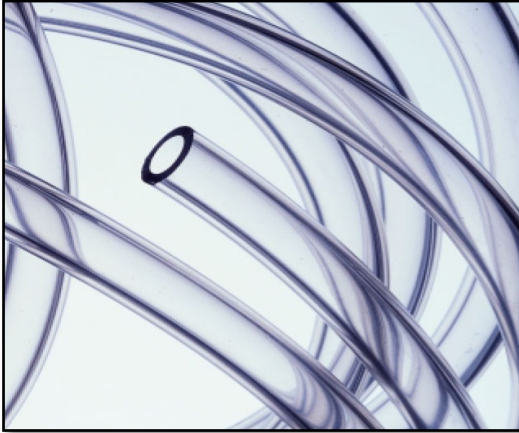

- Resistant to oxidation, chemicals and bacteria.
- Extreme flexibility permits easy set-ups.
- Flushes clean with most conventional cleaners and sanitizers.
- Can be used with a variety of fittings.
- RNT conforms to critical industry standards, having been approved by FDA, USDA, USP Class VI, NSF, 3A and UL.
- Beverage/Bottling and Service.
- Food Processing.

Sold in box quantities.

PART #	BOX QTY	SIZE ID X OD
TRNTS1AX500	500 FT.	1/16" X 1/8"
TRNT1X200	200 FT.	.120" X .170"
TRNT2X100	100 FT.	1/8" X 1/4"
TRNT3X100	100 FT.	3/16" X 5/16"
TRNT4X100	100 FT.	3/16" X 3/8"
TRNT5X100	100 FT.	3/16" X 7/16"
TRNT6X100	100 FT.	1/4" X 3/8"
TRNT7X100	100 FT.	1/4" X 7/16"
TRNT8X100	100 FT.	1/4" X 1/2"
TRNT9X100	100 FT.	5/16" X 7/16"
TRNT10X100	100 FT.	5/16" X 1/2"
TRNT11X100	100 FT.	5/16" X 9/16"
TRNT12X100	100 FT.	3/8" X 1/2"
TRNT13X100	100 FT.	3/8" X 9/16"
TRNT14X100	100 FT.	3/8" X 5/8"
TRNT15X100	100 FT.	7/16" X 9/16"
TRNT17X100	100 FT.	7/16" X 11/16"
TRNT18X100	100 FT.	1/2" X 5/8"
TRNT19X100	100 FT.	1/2" X 11/16"

PART #	BOX QTY	SIZE ID X OD
TRNT20X100	100 FT.	1/2" X 3/4"
TRNT21X100	100 FT.	1/2" X 13/16"
TRNT22X100	100 FT.	9/16" X 3/4"
TRNT23X100	100 FT.	9/16" X 13/16"
TRNT24AX100	100 FT.	5/8" X 3/4"
TRNT25X100	100 FT.	5/8" X 13/16"
TRNT26X100	100 FT.	5/8" X 7/8"
TRNT27X100	100 FT.	5/8" X 15/16"
TRNT28X100	100 FT.	11/16" X 7/8"
TRNT29X100	100 FT.	11/16" X 15/16"
TRNT30X100	100 FT.	11/16" X 1"
TRNT31X100	100 FT.	3/4" X 1"
TRNT32X100	100 FT.	3/4" X 1-1/16"
TRNT33X100	100 FT.	7/8" X 1-1/8"
TRNT35X100	100 FT.	1" X 1-1/4"
TRNT37X100	100 FT.	1" X 1-3/8"
TRNT38X100	100 FT.	1" X 1-1/2"
TRNT40X50	50 FT.	1-1/4" X 1-1/2"
TRNT41X50	50 FT.	1-1/2" X 2"
TRNT42X50	50 FT.	2" X 2-1/2"

PVC LIQUID SUCTION HOSE

PVC Food and Beverage



General Applications:

- Food grade liquids such as beer, wine and juice and potable water
- Ice transfer • Milk and dairy product transfer • Water suction – standard duty

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (65°C).

Features and Advantages:

- Precision Controlled ID and OD Dimensions – Facilitates insertion of sanitary fittings.
- Food Grade Materials – Hose complies with applicable FDA(03) and 3-A(01) requirements. Hose approved by USDA (11) for use in meat and poultry plants.
- Transparent Construction – “See-the-flow.” Allows for visual confirmation of material flow.
- Smooth Outer Cover – Provides increased pressure rating and smooth surface for banding.
- **Amazon Hose will cut hose to your exact size requirements.**

PART #	SIZE
HFPS1	1" ID
HFPS1D	1-1/4" ID
HFPS1H	1-1/2" ID
HFPS2	2" ID
HFPS2H	2-1/2" ID
HFPS3	3" ID
HFPS4	4" ID

PVC DISCHARGE HOSE

Clearbraid K3150 Series RF Standard Wall PVC Food and Beverage Hose



A lightweight, standard wall, crystal clear yarn reinforced hose suitable for a wide variety of food and beverage applications.

- **3A** – The PVC compound complies with the criteria in 3-A Sanitary Standards for Multiple-Use Plastic Materials, number 20.
- **FDA** – The PVC ingredients used are sanctioned for food contact use under CFR title 21, parts 170-199.
- **NSF** – This hose is certified under NSF/ANSI standard 51: Food Equipment Materials.
- **RoHS** – The product complies with the requirements of the EU directive 2002/95/EC which is on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
- **UL** – The clear PVC plastic material is certified for Flame Class HB under the Plastics Components category by UL with a minimum thickness of 0.8 mm.
- **USDA** – The PVC hose has been found chemically acceptable for use in slaughtering, processing, transporting or storage areas in direct contact with meat or poultry food product prepared under Federal Inspection.
- **USP** – The PVC compound has been tested and meets the requirements of the USP guidelines, for Class VI Plastics.
- **Amazon Hose will cut hose to your exact size requirements.**

PART #	SIZE
HFCBHB	1/8" ID
HFCBSC	3/16" ID
HFCBSD	1/4" ID
HFCBSE	5/16" ID
HFCBSF	3/8" ID
HFCBSH	1/2" ID
HFCBSJ	5/8" ID
HFCBSL	3/4" ID
HFCBS1	1" ID
HFCBH1D	1-1/4" ID
HFCBH1H	1-1/2" ID
HFCBH2	2" ID

WORM GEAR CLAMPS

Series 9/16" Hy-Gear 63-4 - Packaging 10 Clamps per box



Material Specifications

Screw: 5/16" Hex Head; 300 stainless.

Band: 9/16" ; 300 stainless.

Installation Torque: 35 in-lbs. (4Nm).

PART #	SIZE	PART #	SIZE
6310	1/2" to 1-1/16"	6340	1" to 4"
6312	1/2" to 1-1/4"	6352	1-3/4" to 3-3/4"
6316	3/4" to 1-1/2"	6364	2-1/2" to 4-1/2"
6320	3/4" to 1-3/4"	6372	3" to 5"
6324	1" to 2"	6380	3-5/8" to 5-1/2"
6328	1-5/16" to 2-1/4"	6388	4-1/2" to 6"
6332	1-1/2" to 2-1/2"	6396	4-3/4" to 6-1/2"

Contact Amazon Hose for pricing and availability on additional sizes for all products on this page.

T-BOLT CLAMPS

T-Bolt Clamps - Style STBC



Material Specifications

Bolt: Can be applied with a standard 7/16" socket wrench, 300 stainless.

Band: 3/4" wide, .25" thick, 300 series stainless steel.

Installation Torque: 50 in-lbs.

PART #	SIZE OD	PART #	SIZE OD	PART #	SIZE OD
STBC131	1.250" to 1.406"	STBC238	2.224" to 2.442"	STBC325	3.016" to 3.312"
STBC150	1.344" to 1.562"	STBC250	2.344" to 2.562"	STBC350	3.266" to 3.562"
STBC163	1.474" to 1.692"	STBC256	2.326" to 2.622"	STBC362	3.386" to 3.682"
STBC175	1.594" to 1.812"	STBC263	2.396" to 2.692"	STBC375	3.516" to 3.812"
STBC188	1.724" to 1.942"	STBC275	2.516" to 2.812"	STBC382	3.586" to 3.882"
STBC200	1.844" to 2.062"	STBC288	2.646" to 2.942"	STBC400	3.766" to 4.062"
STBC212	1.964" to 2.182"	STBC300	2.766" to 3.062"	STBC425	4.016" to 4.312"
STBC225	2.094" to 2.312"	STBC312	2.886" to 3.182"	STBC450	4.266" to 4.562"
				STBC475	4.516" to 4.812"

TRI-CLAMPS

Single Pin Heavy Duty Clamps - with Cross Hole Wing Nut



PART #	SIZE
13MHHM50-75	3/4"
13MHHM100-150	1" - 1-1/2"
13MHHM200	2"
13MHHM300	3"

TRI-CLAMPS GASKETS


PTFE, Silicone and Buna-N Clamp Gaskets - White



PART #	SIZE
42MP-UW75	3/4"
40MP-UW100	1"
40MP-UW150	1-1/2"
40MP-UW200	2"
40MP-UW300	3"

SANITARY METAL ADAPTERS


Rubber Hose Adapters



PART # 304/304L	SIZE	A in	B in	C in	D in
S7714MPHR4010	1"	0.81	1.00	1.99	1.69
S7714MPHR4014	1-1/2"	1.31	1.50	1.99	1.69
S7714MPHR4020	2"	1.81	2.00	2.52	2.31


- Sanitary tubing is 3-A approved.
- Stainless steel sanitary tubing dimensions and materials conform to ASTM A269/A270 and 3-A approved.
- Stainless steel plate flanges made from ASTM A240 (Plate) or cast in conformance with ASTM A351.
- Independent lab verification that fittings meet applicable chemical and physical properties.
- Material test reports available.
- Manufacturing facility is ISO 9001:2008.

Tygon® Hose Adapters

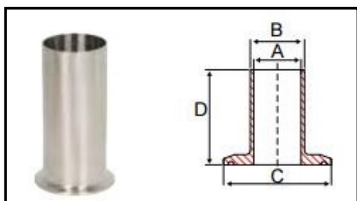

PART # 316/316L	SIZE	A in	B in	C in	D in
S7714MPHT6010	1"	0.81	1.00	1.99	4.50
S7714MPHT6014	1-1/2"	1.31	1.50	1.99	4.50
S7714MPHT6020	2"	1.81	2.00	2.52	4.50


Same above specs apply.

 Use of PVC hose or tubing requires special installation techniques to prevent leakage. All assembly work must be done with heated tube. Cold durometer is 90 as opposed to rubber hose at 65 to 70 durometer. Banding buckles must be rotated 180 degrees from one another.

SANITARY METAL FITTINGS



90° Elbows

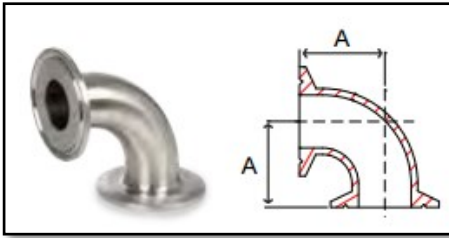


- Sanitary tubing is 3-A approved.
- Stainless steel sanitary tubing dimensions and materials conform to ASTM A269/A270 and 3-A approved.
- Stainless steel plate flanges made from ASTM A240 (Plate) or cast in conformance with ASTM A351.

PART # 304	PART # 316/L	SIZE	A in
—	S772CMP6004	1/2"	1.62
—	S772CMP6006	3/4"	1.62
S772CMP4010	S772CMP6010	1"	2.00
S772CMP4014	S772CMP6014	1-1/2"	2.75
S772CMP4020	S772CMP6020	2"	3.50
S772CMP4024	S772CMP6024	2-1/2"	4.25
S772CMP4030	S772CMP6030	3"	5.00
S772CMP4040	S772CMP6040	4"	6.62
S772CMP4060	S772CMP6060	6"	9.86

- Independent lab verification that fittings meet applicable chemical and physical properties.
- Material test reports available.
- Manufacturing facility is ISO 9001:2008.

45° Elbows

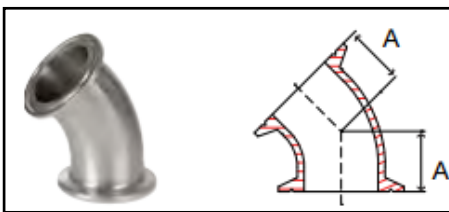


Same above specs apply.

PART # 304	PART # 316/L	SIZE	A in
—	S772KMP6004	1/2"	0.75
—	S772KMP6006	3/4"	0.97
S772KMP4010	S772KMP6010	1"	1.12
S772KMP4014	S772KMP6014	1-1/2"	1.43
S772KMP4020	S772KMP6020	2"	1.75
S772KMP4024	S772KMP6024	2-1/2"	2.06
S772KMP4030	S772KMP6030	3"	2.37
S772KMP4040	S772KMP6040	4"	3.12

SANITARY METAL FITTINGS




Concentric Reducers

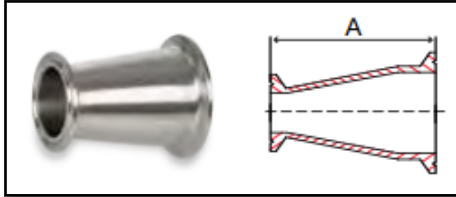

- Sanitary tubing is 3-A approved.
- Stainless steel sanitary tubing dimensions and materials conform to ASTM A269/A270 and 3-A approved.
- Stainless steel plate flanges made from ASTM A240 (Plate) or cast in conformance with ASTM A351.
- Independent lab verification that fittings meet applicable chemical and physical properties.
- Material test reports available.
- Manufacturing facility is ISO 9001:2008.

PART # 304	PART # 316/L	SIZE	A in
—	S773114MP610004	1" X 1/2"	2.00
—	S773114MP610006	1" X 3/4"	2.00
S773114MP414010	S773114MP614010	1-1/2" X 1"	3.00
S773114MP420010	S773114MP620010	2" X 1"	5.00
S773114MP420014	S773114MP620014	2" X 1-1/2"	3.00
S773114MP424020	S773114MP624020	2-1/2" X 2"	5.00
S773114MP430014	S773114MP630014	3" X 1-1/2"	7.00
S773114MP430020	S773114MP630020	3" X 2"	5.00
S773114MP430024	S773114MP630024	3" X 2-1/2"	3.00
S773114MP440020	S773114MP640020	4" X 2"	9.12
S773114MP440024	S773114MP640024	4" X 2-1/2"	7.12
S773114MP440030	S773114MP640030	4" X 3"	5.12

Eccentric Reducers

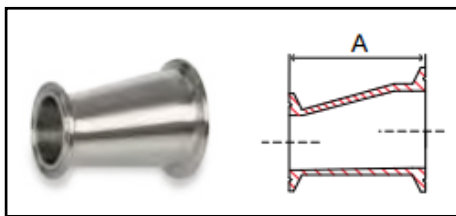


Same above specs apply.

PART # 304	PART # 316/L	SIZE	A in
S773214MP420010	S773214MP620010	2" X 1"	5.00
S773214MP420014	S773214MP620014	2" X 1-1/2"	3.00
S773214MP424014	S773214MP624014	2-1/2" X 1-1/2"	5.00
S773214MP424020	S773214MP624020	2-1/2" X 2"	3.00
S773214MP430014	S773214MP630014	3" X 1-1/2"	7.00
S773214MP430024	S773214MP630020	3" X 2"	5.00
S773214MP430024	S773214MP630024	3" X 2-1/2"	3.00
S773214MP440020	S773214MP640020	4" X 2"	9.12
S773214MP440024	S773214MP640024	4" X 2-1/2"	7.12
S773214MP440030	S773214MP640030	4" X 3"	5.12

SANITARY METAL FITTINGS



Tees

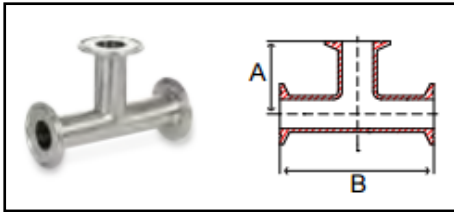


- Sanitary tubing is 3-A approved.
- Stainless steel sanitary tubing dimensions and materials conform to ASTM A269/A270 and 3-A approved.
- Stainless steel plate flanges made from ASTM A240 (Plate) or cast in conformance with ASTM A351.

PART # 304	PART # 316/L	SIZE	A in	B in
—	S777MP6004	1/2"	2.37	4.75
—	S777MP6006	3/4"	2.50	5.00
S777MP4010	S777MP6010	1"	2.37	4.75
S777MP4014	S777MP6014	1-1/2"	2.75	5.50
S777MP4020	S777MP6020	2"	3.50	7.00
S777MP4024	S777MP6024	2-1/2"	3.50	7.00
S777MP4030	S777MP6030	3"	3.75	7.50
S777MP4040	S777MP6040	4"	4.50	9.00
S777MP4060	S777MP6060	6"	6.50	13.00

- Independent lab verification that fittings meet applicable chemical and physical properties.
- Material test reports available.
- Manufacturing facility is ISO 9001:2008.

Solid End Caps



Same above specs apply.

PART # 304	PART # 316/L	SIZE	A in	B in
—	S7716AMP6006	1/2"	0.98	0.18
—	S7716AMP6006	3/4"	0.98	0.18
S7716AMP4014	S7716AMP6014	1"	1.98	0.25
S7716AMP4014	S7716AMP6014	1-1/2"	1.98	0.25
S7716AMP4020	S7716AMP6020	2"	2.51	0.25
S7716AMP4024	S7716AMP6024	2-1/2"	3.04	0.25
S7716AMP4030	S7716AMP6030	3"	3.57	0.25
S7716AMP4040	S7716AMP6040	4"	4.68	0.31
S7716AMP4060	—	6"	6.55	0.35

SANITARY METAL FITTINGS

Sanitary Clamp End Check Valves - 316 Stainless Steel



PART #	SIZE
S7745MP6014	1-1/2"
S7745MP6020	2"
S7745MP6030	3"
S7745MP6040	4"

Features for this product:

- 150 PSI CWP ambient.
- All wetted parts approved for use in food processing.
- All wetted parts polished to 180 grit.

- Sanitary tubing is 3-A approved.
- Stainless steel sanitary tubing dimensions and materials conform to ASTM A269/A270 and 3-A approved.
- Stainless steel plate flanges made from ASTM A240 (Plate) or cast in conformance with ASTM A351.
- Independent lab verification that fittings meet applicable chemical and physical properties.
- Material test reports available.
- Manufacturing facility is ISO 9001:2008.

Sanitary Sight Glass - 316 Stainless Steel



PART #	SIZE
S7754MP6014	1-1/2"
S7754MP6020	2"
S7754MP6030	3"
S7754MP6040	4"

Same above specs apply.

Features for this product:

- 150 PSI CWP ambient.
- 3-A clamp ends.
- EPDM standards, Silicon & Viton available upon request.

SANITARY TRI-CLAMP VALVES

Ball Valves



Features:

- Blow-out proof stem.
- Live-loaded stem packing.
- Lockable handle.
- 15% glass reinforced PTFE seats.
- ID polish is R_a 32.
- CF8M stainless body, ends and ball.
- Pressure ratings: 1/2" through 2" is 1,000 PSI WOG and 2-1/2" through 4" is 800 PSI WOG.
- Repair kits available.
- 316L Stainless Steel.
- Call Amazon Hose for specific dimensions, lbs. and PSI for each valve seat.

PART #	SIZE
BV2GG-050CC-A	1/2"
BV2GG-075CC-A	3/4"
BV2GG-100CC-A	1"
BV2GG-150CC-A	1-1/2"

PART #	SIZE
BV2GG-200CC-A	2"
BV2GG-250CC-A	2-1/2"
BV2GG-300CC-A	3"
BV2GG-400CC-A	4"

Butterfly Valves



Features:

- Lockout / tagout handle.
- Handle is not assembled when shipped. To order with handle assembled on the valve, please request assembly in the special instructions of your order.
- 316L Stainless Steel.
- Call Amazon Hose for specific dimensions, lbs. and PSI for each valve seat.

PART # with Silicone Seats	SIZE
B5101S050CC-C	1/2"
B5101S075CC-C	3/4"
B5101S100CC-C	1"
B5101S150CC-C	1-1/2"
B5101S200CC-C	2"
B5101S250CC-C	2-1/2"
B5101S300CC-C	3"
B5101S400CC-C	4"

PART # with FKM Seats	SIZE
B5101V050CC-C	1/2"
B5101V075CC-C	3/4"
B5101V100CC-C	1"
B5101V150CC-C	1-1/2"
B5101V200CC-C	2"
B5101V250CC-C	2-1/2"
B5101V300CC-C	3"
B5101V400CC-C	4"

PART # with EPDM Seats	SIZE
B5101E050CC-C	1/2"
B5101E075CC-C	3/4"
B5101E100CC-C	1"
B5101E150CC-C	1-1/2"
B5101E200CC-C	2"
B5101E250CC-C	2-1/2"
B5101E300CC-C	3"
B5101E400CC-C	4"

SANITARY TRI-CLAMP VALVES

Butterfly Valves



Features:

- 100% hydraulic tested / 100% inspected.
- All wetted surfaces are sanitary finished to <32R_a.
- Field serviceable (no special tools required).
- Various end configurations available: weld, I-line, Q-line, bevel seat and John Perry.
- Actuation available: double-acting, air-to-spring, electric, call Amazon Hose for details.
- Vacuum rating: 0.4 inches Hg at 68°F.
- Temperature range: 15°F to 200°F.
- Clamp style is standard.
- 316L Stainless Steel.
- Call Amazon Hose for specific dimensions, lbs. and PSI for each valve seat.

PART # with Silicone Seats	SIZE
B5101S050CC-A	1/2"
B5101S075CC-A	3/4"
B5101S100CC-A	1"
B5101S150CC-A	1-1/2"
B5101S200CC-A	2"
B5101S250CC-A	2-1/2"
B5101S300CC-A	3"
B5101S400CC-A	4" ¹
B5101S600CC-A	6"
—	8"

PART # with FKM Seats	SIZE
B5101V050CC-A	1/2"
B5101V075CC-A	3/4"
B5101V100CC-A	1"
B5101V150CC-A	1-1/2"
B5101V200CC-A	2"
B5101V250CC-A	2-1/2"
B5101V300CC-A	3"
B5101V400CC-A	4" ¹
—	6"
—	8"

PART # with EPDM Seats	SIZE
B5101E050CC-A	1/2"
B5101E075CC-A	3/4"
B5101E100CC-A	1"
B5101E150CC-A	1-1/2"
B5101E200CC-A	2"
B5101E250CC-A	2-1/2"
B5101E300CC-A	3"
B5101E400CC-A	4" ¹
B5101E600CC-A	6"
B5101E800CC-A	8"

¹ 4" high pressure butterfly valve is available, call Amazon Hose for more information.

SUPERKLEAN NOZZLES

Standard Spray Nozzles | 150 Series



SuperKlean spray nozzles have rear mounted levers which reduce hand fatigue and offer smooth lever action. The valve seat in all SuperKlean nozzles is an integral part of the nozzle body.

Variable spray patterns, adjustable from fan spray to solid stream, is one of the many features offered by SuperKlean spray nozzles. Water conservation is assured upon release of lever by the drip-free automatic shutoff feature.

SuperKlean Standard spray nozzles are available in:

- Brass (3 lbs.)
- Anodized Aluminum (1.69 lbs.)
- 300 Series Stainless Steel (2.78 lbs.)
- Maximum tested operating pressure: 500 PSI

Contact Amazon Hose for pricing on Aluminum and Stainless Steel spray nozzles.

PART #
SUPERKLEAN 150B-W GUN <i>(white cover)</i>
SUPERKLEAN 150B-DB GUN <i>(dark blue cover)</i>

DuraFlow Spray Nozzles



SuperKlean's new DuraFlow spray nozzle was specifically designed to prevent accidental spray. Its unique cover design is not only durable, but also prevents the front mounted levers, which reduce hand fatigue and offer smooth lever action, from being accidentally activated when the nozzle is dropped. The new DuraFlow spray nozzles also come with a trigger locking mechanism for a safe and secure method of maintaining the nozzle open at any spray pattern.

Variable spray patterns, adjustable from fan spray to solid stream, is one of the many features offered by the new SuperKlean DuraFlow spray nozzle. Water conservation is assured upon release of lever by the drip-free automatic shutoff feature.

SuperKlean DuraFlow spray nozzles are available in:

- 300 Series Stainless Steel (1.53 lbs.)
- Maximum operating pressure: 150 PSI

PART #
DH150S-W <i>(white cover)</i>
DH150S-DB <i>(dark blue cover)</i>

SUPERKLEAN NOZZLE ADAPTERS

Ball Type Swivel Adapters 8-B Series



SuperKlean's new ball type swivel adapters are designed with a 2" long hose barb for a safer and more secure installation. In addition, lock O-rings replace the traditional C-ring. The built-in lever lock ring minimizes hand fatigue. The 360° swivel adapters prevent hose kinking as well as being ergonomically designed to provide a stress free environment by its ability to rotate with hand movements when dragging hose during normal spray usage.

All shanks are Stainless Steel with brass swivel nut.

PART #	DESCRIPTION
SUPERKLEAN 8-B1/2-B	1/2" NPT X 1/2" hose barb, ball type
SUPERKLEAN 8-B5/8-B	1/2" NPT X 5/8" hose barb, ball type
SUPERKLEAN 8-B3/4-B	1/2" NPT X 3/4" hose barb, ball type

Standard Swivel Adapters 8 Series



SuperKlean's swivel adapters are designed with a 2" long hose barb for a safer and more secure installation. The lock O-rings replaced the traditional C-ring. The built-in lever lock ring minimizes hand fatigue. The 360° swivel adapters prevent hose kinking.

All shanks are Stainless Steel with brass swivel nut.

PART #	DESCRIPTION
SUPERKLEAN 8-1/2-B	1/2" NPT X 1/2" hose barb
SUPERKLEAN 8-5/8-B	1/2" NPT X 5/8" hose barb
SUPERKLEAN 8-3/4-B	1/2" NPT X 3/4" hose barb

Garden Hose Adapters




PART #	DESCRIPTION
SUPERKLEAN 8-GHT-B	Swivel adapter (1/2" NPT X 3/4" FGHT), brass and 300 Series Stainless Steel

All shanks are Stainless Steel with brass swivel nut.

WASHDOWN HOSE

Frontier

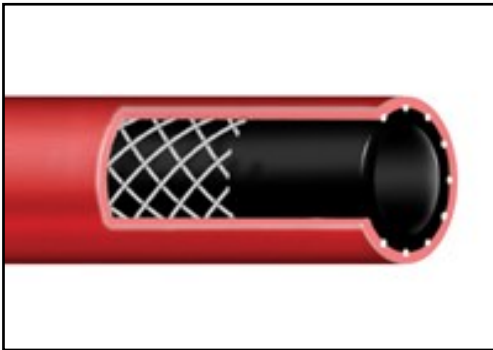

Application: An economical air and water hose, Frontier can be used for a wide range of wash down applications.

Tube: EPDM synthetic rubber, RMA Class C (Limited Oil Resistance).

Stock Hose: Amazon Hose stocks red and black EPDM Frontier hose in 200 PSI. Contact Amazon Hose for availability on 250 and 300 PSI hose, as well in additional colors.

Reinforcement: Spiral synthetic yarn.


Temperature Range: -40°F to 190°F (-40°C to 88°C).

Working Pressure: 200 PSI through 1" ID.

Coupling: Contact Amazon Hose for proper fitting recommendation and coupling procedure.

PART #	SIZE
HARGH200	1/2" ID
HARGL200	3/4" ID
HARG1200	1" ID

Sani-Wash Plus 300

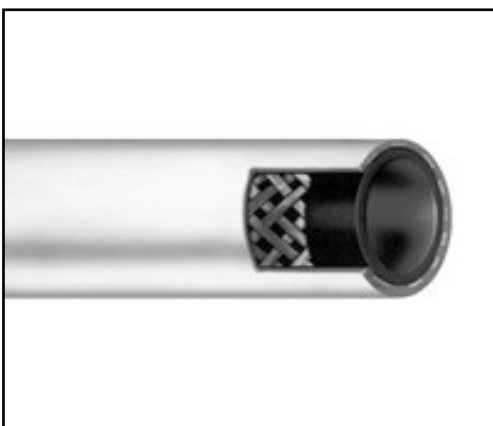

Application: A high quality, economical construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries.

Tube: Black Nitrile synthetic rubber, RMA Class A (High Oil Resistance), non-FDA.

Stock Hose: Amazon Hose stocks White Chemivic™ synthetic rubber, RMA Class A (High Oil Resistance) hose in 1/2", 3/4" and 1" ID.

Reinforcement: Spiral synthetic yarn.

Temperature Range: -20°F to 200°F (-29°C to 93°C).

Working Pressure: 300 PSI on 1/2" and 3/4" ID, 275 PSI on 1" ID.

Coupling: Contact Amazon Hose for proper fitting recommendation and coupling procedure.

PART #	SIZE
HWWDH	1/2" ID
HWWDL	3/4" ID
HWWD1	1" ID

WASHDOWN HOSE

Blue Fortress



Application: The highest quality construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion and oil resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of our Blue Fortress® 300 hose incorporates Microban® antimicrobial built-in product protection. The white tube is comprised of FDA-compliant materials.

Tube: White FDA-compliant nitrile synthetic rubber.

Stock Hose: Amazon Hose stocks 1/2" and 3/4" ID Blue Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) hose. Contact Amazon Hose for additional sizes and availability.

Reinforcement: Spiral synthetic yarn.

Temperature Range: -20°F to 200°F (-29°C to 93°C).

Working Pressure: 300 PSI through 3/4" ID.

Coupling: Contact Amazon Hose for proper fitting recommendation and coupling procedure.

*Minimum orders may apply.

PART #	SIZE
FORTRESS 1/2 BLUE FDA	1/2" ID
FORTRESS 3/4 BLUE FDA	3/4" ID

Contact Amazon Hose for pricing and availability on additional sizes.

SuperKlean Mixing Stations



SuperKlean™

MIXING STATIONS

Available Options:

- Hot & Cold Water Mixing Stations
- Steam & Cold Water Mixing Stations
- Hose Racks

Contact Amazon Hose for more information on the SuperKlean mixing stations.

Sales Policy

Terms

Net 30 day terms are available for accounts approved by our credit department. We reserve the right to withhold shipment to accounts with unpaid balances exceeding 30 days, or, alternatively, to require C.O.D. payment for new purchases until such time as the account is no longer delinquent and credit is reapproved.

Freight

All shipments are F.O.B. Orlando, FL.

Prices

All prices are subjected to change without notice.

Taxes

Applicable sales taxes will be charged on all orders F.O.B. Orlando, FL unless we have customer's exemption certificate on file.

ALL CREDIT TO BE ISSUED AGAINST DEFECTIVE MATERIAL MUST BE AUTHORIZED BY THE MANUFACTURER.

Returned Goods

All merchandise is guaranteed against defects in material and workmanship. Merchandise believed to be defective requires a return authorization form and must be returned prepaid. Freight charges will be refunded if credit is allowed against warranty. Prior approval is required before any merchandise can be returned. Return of non-defective material, or material ordered incorrectly, will be subject to a 25% restocking charge. Cut and/or assembled hose ordered incorrectly **may not** be returned.

Cancellations

On stock material not yet in process, no cancellation charge will apply. On stock material that is in process, a cancellation charge of 25% will be applied. Orders for special or non-stock materials cannot be cancelled.

Technical Data

Various tables and charts may be found on our website www.AmazonHose.com. We offer these as guides and assume no responsibility for their accuracy, as manufacturers may change their specifications without notice.

Special Orders

We require a 50% deposit on all special or non-stock product orders. This payment must be received by Amazon Hose prior to placing the order with our manufacturers.

**WE TRAIN OUR
EMPLOYEES TO
BE EXPERTS.**

NOT ORDER TAKERS.

Every front-line Amazon employee must complete NAHAD Safety Training as well as extensive internal training. These programs teach the fundamental qualities of all our products and prepare employees to fulfill every order effectively.

So whether they're answering the phone, working the counter in our AmaZONE in-person service center, or measuring and finishing hoses for custom orders, all employees understand the products they're working with and can provide knowledgeable service at every point in the process.

S

SIZE

INSIDE DIAMETER, LENGTH, OUTSIDE DIAMETER

T

TEMPERATURE

INTERNAL AND EXTERNAL, NORMAL, MINIMUM AND MAXIMUM

A

APPLICATION

WHAT IS THE HOSE SUPPOSED TO DO ON THE EQUIPMENT

M

MATERIAL

WHAT PRODUCT IS BEING CONVEYED

P

PRESSURE

NORMAL WORKING PRESSURE, BURST PRESSURE

E

ENDS

NECESSARY COUPLINGS, TYPE, SIZE AND THREAD

D

DELIVERY

WHEN AND WHERE ARE PRODUCTS NEEDED



/AmazonHose



@Amazon_Hose



Volume II 5.2017©

ORLANDO

4105 Seaboard Rd.
Orlando, FL 32808
(407) 843-8190
(800) 506-5514
Fax: (407) 422-5577

SOUTH ORLANDO

9961 Sidney Hayes Rd.
Orlando, FL 32824
(407) 843-8190
(800) 506-5514
Fax: (407) 422-5577

TAMPA

1103 N. 50th St.
Tampa, FL 33619
(813) 223-7554
(800) 664-9490
Fax: (813) 223-7567

MIAMI

1001 N.W. 159th Dr.
Miami Gardens, FL 33169
(305) 620-4313
(800) 731-0025
Fax: (305) 356-7308

OrlandoSales@AmazonHose.com

OrlandoHSCSales@AmazonHose.com

TampaSales@AmazonHose.com

MiamiSales@AmazonHose.com

www.AmazonHose.com



Shop.AmazonHose.com