

BREWERY HOSE AND FITTINGS



ORLANDO

4105 Seaboard Rd.
Orlando, FL 32808
(407) 843-8190
(800) 506-5514
Fax: (407) 422-5577

OrlandoSales@AmazonHose.com

MIAMI

1001 N.W. 159th Dr.
Miami Gardens, FL 33169
(305) 620-4313
(800) 731-0025
Fax: (305) 356-7308

MiamiSales@AmazonHose.com

TAMPA

1103 N. 50th St.
Tampa, FL 33619
(813) 223-7554
(800) 664-9490
Fax: (813) 223-7567

TampaSales@AmazonHose.com

TABLE OF CONTENTS

BREWERY HOSE.....	1-3
• Plicord Brewline	
• Plicord Brewline with Crimped Sanitary Tri-Clamp Ends (Assembly)	
• Extremerflex Easy Clean	
• Extremerflex Easy Clean with Crimped Sanitary Tri-Clamp Ends (Assembly)	
• NovaBrew	
• NovaBrew with Crimped Sanitary Tri-Clamp Ends (Assembly)	
WINERY HOSE.....	4
• Vintner	
• Vintner with Crimped Sanitary Tri-Clamp Ends (Assembly)	
SANITARY STYLE STEMS.....	5
• Brewery Hose Barb Adapter for use with Band Clamps	
TRI-CLAMPS.....	5
• Single Pin Heavy Duty Clamps - with Cross Hole Wing Nut	
TRI-CLAMP GASKETS.....	5
• Buna-N Clamp Gaskets - White	
WORM GEAR CLAMPS.....	6
• Series 9/16" Hy-Gear 63-4 - Packaging 10 Clamps per box	
METAL PRODUCTS.....	6
• Sanitary Fittings and Tubing	
CLEAR PVC TUBING.....	7
• Clear Tubing Unreinforced	
PVC LIQUID SUCTION HOSE.....	8
• PVC Food and Beverage	
PVC DISCHARGE HOSE.....	8
• Clearbraid K3150 Series RF Standard Wall PVC Food and Beverage Hose	
SUPERKLEAN NOZZLES.....	9
• Standard Spray Nozzle 150 Series	
• DuraFlow Spray Nozzle	
SUPERKLEAN NOZZLE ADAPTERS.....	10
• Ball Type Swivel Adapters 8-B Series	
• Standard Swivel Adapters 8 Series	
• Garden Hose Adapters	
WASHDOWN HOSE.....	11-12
• Frontier	
• Spectra	
• Blue Fortress	
SUPERKLEAN MIXING STATIONS.....	12
SALES POLICY.....	13

BREWERY HOSE

Plicord Brewline



Application: A quality discharge hose designed specifically for the highly demanding service of transferring non-oily liquid products in wineries and breweries.

Tube: White Chlorobutyl rubber (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03).

Cover: Red Versigard® with a white spiral stripe (wrapped impression).

Reinforcement: Spiral-plyed synthetic fabric, 4 plies to 1-1/2" ID, 6 plies over 1-1/2" ID.

Temperature Range: -40°F to 220°F (-40°C to 104°C).

Working Pressure: 250 PSI through 3" ID.

Stock Sizes: 1", 1-1/2", 2" and 3". Contact Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-BREWLINE-1	1" ID
GY-BREWLINE-1H	1-1/2" ID
GY-BREWLINE-2	2" ID
GY-BREWLINE-3	3" ID

Plicord with Crimped Sanitary Tri-Clamp Ends (Assembly)



Contact Amazon Hose for pricing and availability on additional sizes and specifications.

PART #	SIZE X LENGTH IN FT.
GY-BREWLINE-1X10TC	1" X 10 FT.
GY-BREWLINE-1X15TC	1" X 15 FT.
GY-BREWLINE-1X20TC	1" X 20 FT.
GY-BREWLINE-1X25TC	1" X 25 FT.
GY-BREWLINE-1X50TC	1" X 50 FT.
GY-BREWLINE-1HX10TC	1-1/2" X 10 FT.
GY-BREWLINE-1HX15TC	1-1/2" X 15 FT.
GY-BREWLINE-1HX20TC	1-1/2" X 20 FT.
GY-BREWLINE-1HX25TC	1-1/2" X 25 FT.
GY-BREWLINE-1HX50TC	1-1/2" X 50 FT.

PART #	SIZE X LENGTH IN FT.
GY-BREWLINE-2X10TC	2" X 10 FT.
GY-BREWLINE-2X15TC	2" X 15 FT.
GY-BREWLINE-2X20TC	2" X 20 FT.
GY-BREWLINE-2X25TC	2" X 25 FT.
GY-BREWLINE-2X50TC	2" X 50 FT.
GY-BREWLINE-3X10TC	3" X 10 FT.
GY-BREWLINE-3X15TC	3" X 15 FT.
GY-BREWLINE-3X20TC	3" X 20 FT.
GY-BREWLINE-3X25TC	3" X 25 FT.
GY-BREWLINE-3X50TC	3" X 50 FT.

BREWERY HOSE

Extremeflex Easy Clean



Application: For beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Construction

Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03).

Cover: New Corrugated Red EZ Clean UHMWPE cover (semi-smooth finish).

Reinforcement: Spiral-plied fabrics with double galvanized helix wire.

Temperature Range: -30° F to 220° F (-34° C to 104° C).


Working Pressure: 2" - 250 PSI and 3" - 200 PSI.

Stock Sizes: 2" and 3" in red only. Contact Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-EXTREMEFLEX-2	2" ID
GY-EXTREMEFLEX-3	3" ID

Extremeflex with Crimped Sanitary Tri-Clamp Ends (Assembly)

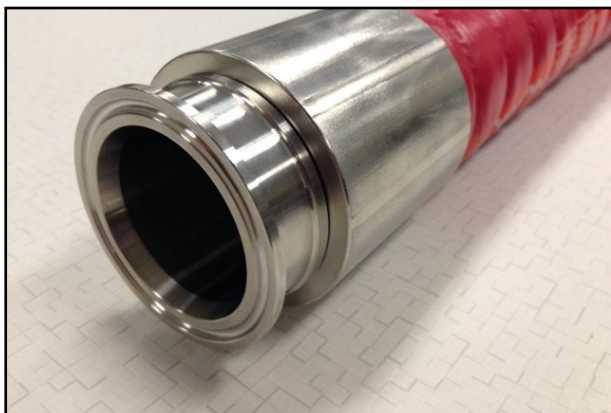

PART #	SIZE X LENGTH IN FT.
GY-EXTREMEFLEXEC-2X10TC	2" X 10 FT.
GY-EXTREMEFLEXEC-2X15TC	2" X 15 FT.
GY-EXTREMEFLEXEC-2X20TC	2" X 20 FT.
GY-EXTREMEFLEXEC-2X25TC	2" X 25 FT.
GY-EXTREMEFLEXEC-2X50TC	2" X 50 FT.
GY-EXTREMEFLEXEC-3X10TC	3" X 10 FT.
GY-EXTREMEFLEXEC-3X15TC	3" X 15 FT.
GY-EXTREMEFLEXEC-3X20TC	3" X 20 FT.
GY-EXTREMEFLEXEC-3X25TC	3" X 25 FT.
GY-EXTREMEFLEXEC-3X50TC	3" X 50 FT.

BREWERY HOSE

NovaBrew



Novaflex NovaBrew 6507NB is a state of the art designed hose based on the specific requirements of today's modern breweries. NovaBrew™ has a rugged but flexible construction with a smooth white microbe resistant chlorobutyl tube, for non-oily applications, a cover that resists dirt scuffs and is easily cleaned. NovaBrew meets the requirements of FDA, USDA, CFIA and 3-A (Cert#1803).

Tube: White Chlorobutyl (non-oily applications).

Reinforcement: Multiple plies of polyester tire cord, dual monofilament helix rods. Static wire version available on request.

Cover: Dark burgundy EPDM.

Temperature Range: -40°F (-40°C) to 240°F (116°C) Cleaning in Place to 248°F (120°C). Can be open end steam cleaned.

Working Pressure: 250 PSI. Full vacuum rated through 2" ID.

Stock Sizes (ID): 1", 1-1/2" and 2". Call Amazon Hose for additional sizes and availability.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
6507NB-0100	1" ID
6507NB-0150	1-1/2" ID
6507NB-0200	2" ID

NovaBrew with Crimped Sanitary Tri-Clamp Ends (Assembly)



PART #	SIZE X LENGTH IN FT.
6507NB-0100X10TC	1" X 10 FT.
6507NB-0100X15TC	1" X 15 FT.
6507NB-0100X20TC	1" X 20 FT.
6507NB-0100X25TC	1" X 25 FT.
6507NB-0100X50TC	1" X 50 FT.
6507NB-0150X10TC	1-1/2" X 10 FT.
6507NB-0150X15TC	1-1/2" X 15 FT.
6507NB-0150X20TC	1-1/2" X 20 FT.
6507NB-0150X25TC	1-1/2" X 25 FT.
6507NB-0150X50TC	1-1/2" X 50 FT.
6507NB-0200X10TC	2" X 10 FT.
6507NB-0200X15TC	2" X 15 FT.
6507NB-0200X20TC	2" X 20 FT.
6507NB-0200X25TC	2" X 25 FT.
6507NB-0200X50TC	2" X 50 FT.

WINERY HOSE

Vintner



Application: For handling in-plant and/or tank truck transfer of wine, beer, potable water and other non-oily, liquid food stuffs.

Temperature Range: -30°F to 220°F (-34°C to 104°C).

Working Pressure: 250 PSI through 2" ID.

Stock Sizes (ID): 1", 1-1/2" and 2". Call Amazon Hose for additional sizes and availability.

Construction

Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03).

Reinforcement: Spiral-plied synthetic fabric with monofilament helix.

Cover: Gray Versigard® synthetic rubber (wrapped) /purple branding tape.

Couplings: Contact Amazon Hose for a complete line of fitting options.

PART #	SIZE
GY-VINTNER-1	1" ID
GY-VINTNER-1H	1-1/2" ID
GY-VINTNER-2	2" ID

Vintner with Crimped Sanitary Tri-Clamp Ends (Assembly)



PART #	SIZE X LENGTH IN FT.
GY-VINTNER-1X10TC	1" X 10 FT.
GY-VINTNER-1X15TC	1" X 15 FT.
GY-VINTNER-1X20TC	1" X 20 FT.
GY-VINTNER-1X25TC	1" X 25 FT.
GY-VINTNER-1X50TC	1" X 50 FT.
GY-VINTNER-1HX10TC	1-1/2" X 10 FT.
GY-VINTNER-1HX15TC	1-1/2" X 15 FT.
GY-VINTNER-1HX20TC	1-1/2" X 20 FT.
GY-VINTNER-1HX25TC	1-1/2" X 25 FT.
GY-VINTNER-1HX50TC	1-1/2" X 50 FT.
GY-VINTNER-2X10TC	2" X 10 FT.
GY-VINTNER-2X15TC	2" X 15 FT.
GY-VINTNER-2X20TC	2" X 20 FT.
GY-VINTNER-2X25TC	2" X 25 FT.
GY-VINTNER-2X50TC	2" X 50 FT.

SANITARY STYLE STEMS

Brewery Hose Barb Adapter for use with Band Clamps



PART #	SIZE
14MPHRL100	1"
14MPHRL150	1-1/2"
14MPHRL200	2"
14MPHRL300	3"



Use of PVC hose or tubing requires special installation techniques to prevent leakage. All assembly work must be done with heated tube. Cold durometer is 90 as opposed to rubber hose at 65 to 70 durometer. Banding buckles must be rotated 180 degrees from one another.

TRI-CLAMPS

Single Pin Heavy Duty Clamps - with Cross Hole Wing Nut



PART #	SIZE
13MHM50-75	3/4"
13MHM100-150	1" - 1-1/2"
13MHM200	2"
13MHM300	3"

Contact Amazon Hose for pricing and availability on additional sizes.

TRI-CLAMP GASKETS

Buna-N Clamp Gaskets - White



PART #	SIZE
42MP-UW75	3/4"
42MP-UW100	1"
40MP-UW150	1-1/2"
40MP-UW200	2"
40MP-UW300	3"

Contact Amazon Hose for pricing and availability on additional sizes.

WORM GEAR CLAMPS

Series 9/16" Hy-Gear 63-4 - Packaging 10 Clamps per box



PART #	SIZE
6310	1/2" to 1-1/16"
6312	1/2" to 1-1/4"
6316	3/4" to 1-1/2"
6320	3/4" to 1-3/4"
6324	1" to 2"
6328	1-5/16" to 2-1/4"
6332	1-1/2" to 2-1/2"

PART #	SIZE
6340	1" to 4"
6352	1-3/4" to 3-3/4"
6364	2-1/2" to 4-1/2"
6372	3" to 5"
6380	3-5/8" to 5-1/2"
6388	4-1/2" to 6"
6396	4-3/4" to 6-1/2"

Material Specifications

Screw: 5/16" Hex Head; 300 Stainless.

Band: 300 Stainless.

Band: 9/16"; 300 Stainless.

Installation Torque: 35 in-lbs. (4Nm).

Contact Amazon Hose for pricing and availability on additional sizes.



METAL PRODUCTS

Sanitary Fittings and Tubing




We offer a complete line of sanitary fittings, BPE fittings, valves, flanges and accessories. To compliment our growing product lines, we also offer tubing from Rath Manufacturing in all finishes, materials and size ranges generally required for standard and non-standard applications. Product availability, quality and competitive pricing allow us to serve as an excellent one-stop source for all of your tubing, valve and fitting requirements. Contact Amazon Hose for pricing and specifications.

- **Y ADAPTERS**
- **REDUCERS**
- **TUBE BENDS**

CLEAR PVC TUBING

Clear Tubing Unreinforced

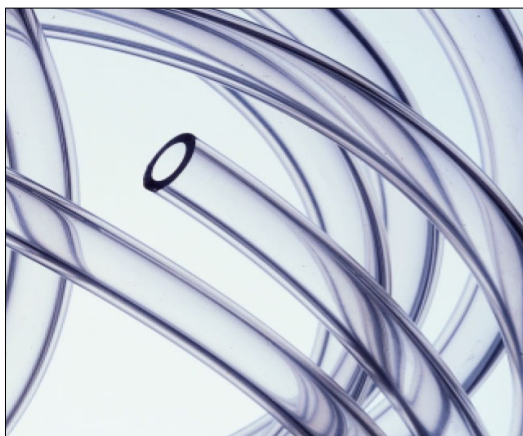

- Resistant to oxidation, chemicals and bacteria.
- Extreme flexibility permits easy set-ups.
- Flushes clean with most conventional cleaners and sanitizers.
- Can be used with a variety of fittings.
- RNT conforms to critical industry standards, having been approved by FDA, USDA, USP Class VI, NSF, 3A and UL.
- Beverage/Bottling and Service.
- Food Processing.

Sold in box quantities of 100 ft. lengths.

PART #	SIZE ID X OD
TRNTS1A	1/16" X 1/8"
TRNT1	.120" X .170"
TRNT2	1/8" X 1/4"
TRNT3	3/16" X 5/16"
TRNT4	3/16" X 3/8"
TRNT5	3/16" X 7/16"
TRNT6	1/4" X 3/8"
TRNT7	1/4" X 7/16"
TRNT8	1/4" X 1/2"
TRNT9	5/16" X 7/16"
TRNT10	5/16" X 1/2"
TRNT11	5/16" X 9/16"
TRNT12	3/8" X 1/2"
TRNT13	3/8" X 9/16"
TRNT14	3/8" X 5/8"
TRNT15	7/16" X 9/16"
TRNT17	7/16" X 11/16"
TRNT18	1/2" X 5/8"
TRNT19	1/2" X 11/16"

PART #	SIZE ID X OD
TRNT20	1/2" X 3/4"
TRNT21	1/2" X 13/16"
TRNT22	9/16" X 3/4"
TRNT23	9/16" X 13/16"
TRNT24A	5/8" X 3/4"
TRNT25	5/8" X 13/16"
TRNT26	5/8" X 7/8"
TRNT27	5/8" X 15/16"
TRNT28	11/16" X 7/8"
TRNT29	11/16" X 15/16"
TRNT30	11/16" X 1"
TRNT31	3/4" X 1"
TRNT32	3/4" X 1-1/16"
TRNT33	7/8" X 1-1/8"
TRNT35	1" X 1-1/4"
TRNT37	1" X 1-3/8"
TRNT38	1" X 1-1/2"
TRNT40	1-1/4" X 1-1/2"
TRNT41	1-1/2" X 2"
TRNT42	2" X 2-1/2"

PVC LIQUID SUCTION HOSE

PVC Food and Beverage



General Applications:

- Food grade liquids such as beer, wine and juice and potable water
- Ice transfer • Milk and dairy product transfer • Water suction – standard duty

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (65°C).

Features and Advantages:

- Precision Controlled ID and OD Dimensions – Facilitates insertion of sanitary fittings.
- Food Grade Materials – Hose complies with applicable FDA(03) and 3-A(01) requirements. Hose approved by USDA (11) for use in meat and poultry plants.
- Transparent Construction – “See-the-flow.” Allows for visual confirmation of material flow.
- Smooth Outer Cover – Provides increased pressure rating and smooth surface for banding.

PART #	SIZE
HFPS1	1" ID
HFPS1D	1-1/4" ID
HFPS1H	1-1/2" ID
HFPS2	2" ID
HFPS2H	2-1/2" ID
HFPS3	3" ID
HFPS4	4" ID

PVC DISCHARGE HOSE

Clearbraid K3150 Series RF Standard Wall PVC Food and Beverage Hose



A lightweight, standard wall, crystal clear yarn reinforced hose suitable for a wide variety of food and beverage applications.

• **3A** – The PVC compound complies with the criteria in 3-A Sanitary Standards for Multiple-Use Plastic Materials, number 20.

• **FDA** – The PVC ingredients used are sanctioned for food contact use under CFR title 21, parts 170-199.

• **NSF** – This hose is certified under NSF/ANSI standard 51: Food Equipment Materials.

• **RoHS** – The product complies with the requirements of the EU directive 2002/95/EC which is on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

• **UL** – The clear PVC plastic material is certified for Flame Class HB under the Plastics Components category by UL with a minimum thickness of 0.8 mm.

• **USDA** – The PVC hose has been found chemically acceptable for use in slaughtering, processing, transporting or storage areas in direct contact with meat or poultry food product prepared under Federal Inspection.

• **USP** – The PVC compound has been tested and meets the requirements of the USP guidelines, for Class VI Plastics.

PART #	SIZE
HFCBHB	1/8" ID
HFCBSC	3/16" ID
HFCBSD	1/4" ID
HFCBSE	5/16" ID
HFCBSF	3/8" ID
HFCBSH	1/2" ID
HFCBSJ	5/8" ID
HFCBSL	3/4" ID
HFCBS1	1" ID
HFCBH1D	1-1/4" ID
HFCBH1H	1-1/2" ID
HFCBH2	2" ID

SUPERKLEAN NOZZLES

Standard Spray Nozzle | 150 Series



SuperKlean spray nozzles have rear mounted levers which reduce hand fatigue and offer smooth lever action. The valve seat in all SuperKlean nozzles is an integral part of the nozzle body.

Variable spray patterns, adjustable from fan spray to solid stream, is one of the many features offered by SuperKlean spray nozzles. Water conservation is assured upon release of lever by the drip-free automatic shutoff feature.

SuperKlean Standard spray nozzles are available in:

- Brass (3 lbs.)
- Anodized Aluminum (1.69 lbs.)
- 300 Series Stainless Steel (2.78 lbs.)
- Maximum tested operating pressure: 500 PSI

Contact Amazon Hose for pricing on Aluminum and Stainless Steel spray nozzles.

PART #
SUPERKLEAN 150B-W GUN (white cover)
SUPERKLEAN 150B-DB GUN (dark blue cover)

DuraFlow Spray Nozzle



SuperKlean's new DuraFlow spray nozzle was specifically designed to prevent accidental spray. Its unique cover design is not only durable, but also prevents the front mounted levers, which reduce hand fatigue and offer smooth lever action, from being accidentally activated when the nozzle is dropped. The new DuraFlow spray nozzles also come with a trigger locking mechanism for a safe and secure method of maintaining the nozzle open at any spray pattern.

Variable spray patterns, adjustable from fan spray to solid stream, is one of the many features offered by the new SuperKlean DuraFlow spray nozzle. Water conservation is assured upon release of lever by the drip-free automatic shutoff feature.

SuperKlean DuraFlow spray nozzles are available in:

- 300 Series Stainless Steel (1.53 lbs.)
- Maximum operating pressure: 150 PSI

PART #
DH150S-W (white cover)
DH150S-DB (dark blue cover)

SUPERKLEAN NOZZLE ADAPTERS

Ball Type Swivel Adapters 8-B Series



SuperKlean's new ball type swivel adapters are designed with a 2" long hose barb for a safer and more secure installation. In addition, lock O-rings replace the traditional C-ring. The built-in lever lock ring minimizes hand fatigue. The 360° swivel adapters prevent hose kinking as well as being ergonomically designed to provide a stress free environment by its ability to rotate with hand movements when dragging hose during normal spray usage.

All shanks are Stainless Steel with brass swivel nut.

PART #	DESCRIPTION
SUPERKLEAN 8-B1/2-B	1/2" NPT X 1/2" hose barb, ball type
SUPERKLEAN 8-B5/8-B	1/2" NPT X 5/8" hose barb, ball type
SUPERKLEAN 8-B3/4-B	1/2" NPT X 3/4" hose barb, ball type

Standard Swivel Adapters 8 Series



SuperKlean's swivel adapters are designed with a 2" long hose barb for a safer and more secure installation. The lock O-rings replaced the traditional C-ring. The built-in lever lock ring minimizes hand fatigue. The 360° swivel adapters prevent hose kinking.

All shanks are Stainless Steel with brass swivel nut.

PART #	DESCRIPTION
SUPERKLEAN 8-1/2-B	1/2" NPT X 1/2" hose barb
SUPERKLEAN 8-5/8-B	1/2" NPT X 5/8" hose barb
SUPERKLEAN 8-3/4-B	1/2" NPT X 3/4" hose barb

Garden Hose Adapters



PART #	DESCRIPTION
SUPERKLEAN 8-GHT-B	Swivel adapter (1/2" NPT X 3/4" FGHT), brass and 300 Series Stainless Steel

All shanks are Stainless Steel with brass swivel nut.

WASHDOWN HOSE

Frontier



Application: An economical air and water hose, Frontier can be used for a wide range of wash down applications.

Construction

Tube: Versigard® synthetic rubber, RMA Class C (Limited Oil Resistance).

Stock Hose: Amazon Hose stocks red and black Versigard Frontier hose in 200 PSI. Contact Amazon Hose for availability on 250 and 300 PSI hose, as well in additional colors.

Reinforcement: Spiral synthetic yarn.


Temperature Range: -40°F to 190°F (-40°C to 88°C).

Working Pressure: 200 PSI through 1" ID.

Coupling: Contact Amazon Hose for proper fitting recommendation and coupling procedure.

PART #	SIZE
HARGH200	1/2" ID
HARGL200	3/4" ID
HARG1200	1" ID

Spectra

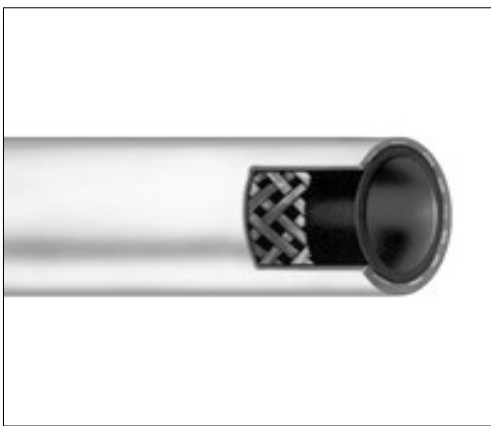

Application: A high quality, economical construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries.

Construction

Tube: Black Nitrile synthetic rubber, RMA Class A (High Oil Resistance), non-FDA.

Stock Hose: Amazon Hose stocks White Chemivic™ synthetic rubber, RMA Class A (High Oil Resistance) hose in 1/2", 3/4" and 1" ID.

Reinforcement: Spiral synthetic yarn.

Temperature Range: -20°F to 200°F (-29°C to 93°C).

Working Pressure: 300 PSI on 1/2" and 3/4" ID, 275 PSI on 1" ID.

Coupling: Contact Amazon Hose for proper fitting recommendation and coupling procedure.

PART #	SIZE
HWWDH	1/2" ID
HWDDL	3/4" ID
HWWD1	1" ID

WASHDOWN HOSE

Blue Fortress



Application: The highest quality construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion and oil resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of our Blue Fortress® 300 hose incorporates Microban® antimicrobial built-in product protection. The white tube is comprised of FDA-compliant materials.

Construction

Tube: White FDA-compliant nitrile synthetic rubber.

Stock Hose: Amazon Hose stocks 1/2" and 3/4" ID Blue Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) hose. Contact Amazon Hose for additional sizes and availability.

Reinforcement: Spiral synthetic yarn.

Temperature Range: -20°F to 200°F (-29°C to 93°C).

Working Pressure: 300 PSI through 1" ID.

Coupling: Contact Amazon Hose for proper fitting recommendation and coupling procedure.

PART #	SIZE
FORTRESS 1/2 BLUE FDA	1/2" ID
FORTRESS 3/4 BLUE FDA	3/4" ID
FORTRESS 1 BLUE FDA	1" ID

SuperKlean Mixing Stations



SuperKlean™ MIXING STATIONS

Available Options:

- Hot & Cold Water Mixing Stations
- Steam & Cold Water Mixing Stations
- Hose Racks

Contact Amazon Hose for more information on the SuperKlean mixing stations.

Sales Policy

Terms

Net 30 day terms are available for accounts approved by our credit department. We reserve the right to withhold shipment to accounts with unpaid balances exceeding 30 days, or, alternatively, to require C.O.D. payment for new purchases until such time as the account is no longer delinquent and credit is reapproved.

Freight

All shipments are F.O.B. Orlando, FL.

Prices

All prices are subjected to change without notice.

Taxes

Applicable sales taxes will be charged on all orders F.O.B. Orlando, FL unless we have customer's exemption certificate on file.

ALL CREDIT TO BE ISSUED AGAINST DEFECTIVE MATERIAL MUST BE AUTHORIZED BY THE MANUFACTURER.

Returned Goods

All merchandise is guaranteed against defects in material and workmanship. Merchandise believed to be defective requires a return authorization form and must be returned prepaid. Freight charges will be refunded if credit is allowed against warranty. Prior approval is required before any merchandise can be returned. Return of non-defective material, or material ordered incorrectly, will be subject to a 25% restocking charge. Cut and/or assembled hose ordered incorrectly may not be returned.

Cancellations

On stock material not yet in process, no cancellation charge will apply. On stock material that is in process, a cancellation charge of 25% will be applied. Orders for special or non-stock materials cannot be cancelled.

Technical Data

Various tables and charts may be found on our website www.AmazonHose.com. We offer these as guides and assume no responsibility for their accuracy, as manufacturers may change their specifications without notice.

Special Orders

We require a 50% deposit on all special or non-stock product orders. This payment must be received by Amazon Hose prior to placing the order with our manufacturers.

NOTES

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

[illegible]

**WE TRAIN OUR
EMPLOYEES TO
BE EXPERTS.**

NOT ORDER TAKERS.

Every front-line Amazon employee must complete NAHAD Safety Training as well as extensive internal training. These programs teach the fundamental qualities of all our products and prepare employees to fulfill every order effectively.

So whether they're answering the phone, working the counter in our AmaZONE in-person service center, or measuring and finishing hoses for custom orders, all employees understand the products they're working with and can provide knowledgeable service at every point in the process.

S

SIZE

INSIDE DIAMETER, LENGTH, OUTSIDE DIAMETER

T

TEMPERATURE

INTERNAL AND EXTERNAL, NORMAL, MINIMUM AND MAXIMUM

A

APPLICATION

WHAT IS THE HOSE SUPPOSED TO DO ON THE EQUIPMENT

M

MATERIAL

WHAT PRODUCT IS BEING CONVEYED

P

PRESSURE

NORMAL WORKING PRESSURE, BURST PRESSURE

E

ENDS


NECESSARY COUPLINGS, TYPE, SIZE AND THREAD

D

DELIVERY

WHEN AND WHERE ARE PRODUCTS NEEDED

 @Amazon_Hose

 /AmazonHose

Volume II: 4/1/2016

ORLANDO

4105 Seaboard Rd.
Orlando, FL 32808
(407) 843-8190
(800) 506-5514
Fax: (407) 422-5577

OrlandoSales@AmazonHose.com

MIAMI

1001 N.W. 159th Dr.
Miami Gardens, FL 33169
(305) 620-4313
(800) 731-0025
Fax: (305) 356-7308

MiamiSales@AmazonHose.com

TAMPA

1103 N. 50th St.
Tampa, FL 33619
(813) 223-7554
(800) 664-9490
Fax: (813) 223-7567

TampaSales@AmazonHose.com