



HOSE · FITTINGS · VALVES · PUMPS · MRO SUPPLIES · AND MORE!

amazonhose.com

About Us

Rubber hoses made back in the early 1900s were comprised of pure gum rubber tapped from the Amazonian trees, which often grow more than 100 feet high. The original source for most of this quality gum rubber was the Amazon River Basin of South America from which Amazon Hose & Rubber Founder Harry E. Jacoby adopted the name “Amazon.”

From the Chicago location, business grew to include expanded service and product distribution at locations in Miami and Tampa during the 1940s and early '50s. Surviving World War II, Amazon Hose & Rubber emerged with a broad range of hoses and tubing made of quality synthetic materials. Each location continues in the tradition of quality service and products — “an inch or a mile.”

In 1981, Amazon Hose & Rubber opened its Orlando location serving the growing Central Florida area with walk-in service. Each location maintains a comprehensive stock of hoses, tubing, fittings and couplings for industrial and hydraulic applications. In 2017, we expanded into South Orlando and opened the first Continental Hose Service Center. We’ve moved our newest location from Riviera Beach, which opened in 2021, to West Palm Beach in 2026 to serve our customers in Palm Beach County.

Easy access to overnight ground and air shipping services allow Amazon Hose to provide quality service for North American clients from coast-to-coast, as well serving International clients.

Se Habla Español




What is an Elite Distributor?

The Continental Hose Division has developed a Distributor Program recognizing their top distributors throughout North America. This program is called “Elite” and signifies the strong partnership that the distributor and Continental have to grow the markets we serve with the best brands. There are only 20 Elite Distributors out of 250 throughout North America, and Amazon Hose is currently the only Elite Distributor for both Industrial and Hydraulic Hose fabrication and sales.

SHOP NOW

We Ship Direct To You!



**Order Online
at Shop.AmazonHose.com**

Table of Contents

Pump Hose Kits and Bulk Hose.....	4
Suction Hose.....	5-6
Suction & Discharge Hose.....	7
Discharge Hose.....	8-10
Dewatering Accessories.....	11
Cam & Groove Fittings.....	12-13
Camlock Gaskets, Reducers, and Increasers.....	14
Flanges.....	15
Pipe Assemblies & Accessories.....	16-18
Water Hoses & Accessories.....	19-20
Clamps & Banding Tools.....	21-23
Hydro Excavation & Vacuum Truck Hoses & Accessories.....	24-25
Sewer, Septic, and Hi-Vac Hoses.....	26
Submersible Pumps.....	27-28
Engine Driven Pumps.....	29
TE Series Pumps.....	30
EPT Series Pumps.....	31
THP Series Pumps.....	32
Dewatering Bags and Pipe Plugs.....	33
150# Flange Adapters & Valves.....	34
Pressure Gauges.....	35
Hose Reels, Cable Reels, and Cord Reels.....	36
Valves.....	37
V-Belts.....	38
Synchronous Belts.....	39
Air Hose, Couplings, and Accessories.....	40-41
Duct Hoses.....	42
Concrete Pump Hoses and Accessories.....	43
Missile Boring Hoses and Accessories.....	44
Hydraulic Hoses.....	45
Hydraulic Fittings.....	46
Shop In A Box with Crimper.....	47
Hydraulic Couplings, Equipment, and Spill Containment Solutions.....	48
Pressure Washer Hose Assemblies and Accessories.....	49
Filtration.....	50

PUMP HOSE KITS

HOSE KIT 1

Pump Hose Kit Female Camlock x Male Pipe Threaded Suction Hose

KIT INCLUDES:

- One 20 FT. Green PVC Suction Hose with Crimped Female Camlock and Male Pipe Threaded ends
- One 50 FT. Blue Discharge hose with Male and Female Camlocks
- Two Male Camlock Adapters
- One Strainer

SIZE	PART #
1-1/2"	HPK1 - 15
2"	HPK1 - 20
3"	HPK1 - 30
4"	HPK1 - 40
6"	HPK1 - 60



HOSE KIT 2

Pump Hose Kit Male x Female Pipe Threaded Suction Hose

KIT INCLUDES:

- One 20 FT. Green PVC Suction Hose with Male and Female Pipe Threaded couplings
- One 50 FT. Blue PVC Discharge Hose with Male and Female Camlocks
- One Male Camlock Adapter
- One Strainer

SIZE	PART #
1-1/2"	HPK2 - 15
2"	HPK2 - 20
3"	HPK2 - 30
4"	HPK2 - 40
6"	HPK2 - 60



GREEN PVC SUCTION HOSE		PART #
1-1/2"	100 FT. ROLLS	HWPS1H
2"	100 FT. ROLLS	HWPS2
3"	100 FT. ROLLS	HWPS3
4"	100 FT. ROLLS	HWPS4
6"	20 FT. STICKS	HWPS6
6"	100 FT. ROLLS	HWPS6
8"	20 FT. STICKS	HWPS8



CLEAR x WHITE PVC SUCTION HOSE		PART #
1-1/2"	100 FT. ROLLS	HWPSC1H
2"	100 FT. ROLLS	HWPSC2



Call for additional sizes.

BLUE PVC DISCHARGE HOSE*		WORKING PRESURE	PART #
1-1/2"	300 FT. ROLLS	80 PSI at 70° F	HWPB1H
2"	300 FT. ROLLS	80 PSI at 70° F	HWPB2
3"	300 FT. ROLLS	80 PSI at 70° F	HWPB3
4"	300 FT. ROLLS	70 PSI at 70° F	HWPB4
6"	300 FT. ROLLS	60 PSI at 70° F	HWPB6
8"	300 FT. ROLLS	35 PSI at 70° F	HWPB8



**Call for availability on 10", 12" & above.*

RED PVC DISCHARGE HOSE		WORKING PRESURE	PART #
2"	300 FT. ROLLS	130 PSI at 70° F	JIWDR200
3"	300 FT. ROLLS	125 PSI at 70° F	JIWDR300
4"	300 FT. ROLLS	125 PSI at 70° F	JIWDR400
6"	300 FT. ROLLS	115 PSI at 70° F	JIWDR600
8"	300 FT. ROLLS	70 PSI at 70° F	JIWDR800



NITRILE/ PVC DISCHARGE HOSE		WORKING PRESURE	PART #
4"	50 & 100 FT. ROLLS	150 PSI at 70° F	HWGF400
6"	50 & 100 FT. ROLLS	150 PSI at 70° F	HWGF600
8"	50 & 100 FT. ROLLS	150 PSI at 70° F	HWGF800




**Hose end choice may lower working psi on Blue, Red, and Nitrile/PVC bulk hoses above.*

SUCTION HOSE

Green PVC Suction Hose Assemblies

GREEN PVC SUCTION WITH CRIMPED FEMALE CAMLOCK x MALE PIPE THREADED			PART #
1-1/2"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWS.1520CKN
2"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWS.220CKN
3"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWS.320CKN
4"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWS.420CKN
6"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWS.620CKN

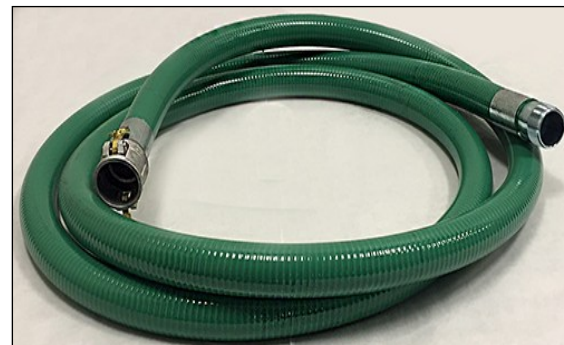

GREEN PVC SUCTION WITH CRIMPED MALE x FEMALE CAMLOCKS			PART #
1-1/2"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWS.1520CE
2"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWS.220CE
3"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWS.320CE
4"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWS.420CE
6"	x 10 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWS.610CE
6"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWS.620CE



GREEN PVC SUCTION WITH BANDED MALE x FEMALE PIPE THREADED			PART #
1-1/2"	x 20 FT.	INCLUDES BANDED MALE & FEMALE THREADED COUPLINGS	WS.1520WC
2"	x 20 FT.	INCLUDES BANDED MALE & FEMALE THREADED COUPLINGS	WS.220WC
3"	x 20 FT.	INCLUDES BANDED MALE & FEMALE THREADED COUPLINGS	WS.320WC
4"	x 20 FT.	INCLUDES BANDED MALE & FEMALE THREADED COUPLINGS	WS.420WC
6"	x 20 FT.	INCLUDES BANDED MALE & FEMALE THREADED COUPLINGS	WS.620WC



SUCTION HOSE

Kanaline Style Fabric Reinforced Suction Hose Assemblies

CLEAR WITH ORANGE HELIX			PART # Crimped w/MxF Bauer Style Fittings	PART # Crimped w/MxF Camlock Fittings
3"	x 20 FT.	SUCTION SERVICE ONLY	CWSC.320BF	CWSC.320CE
4"	x 20 FT.	SUCTION SERVICE ONLY	CWSC.420BF	CWSC.420CE
6"	x 20 FT.	SUCTION SERVICE ONLY	CWSC.620BF	CWSC.620CE
8"	x 20 FT.	SUCTION SERVICE ONLY	CWSC.820BF	CWSC.820CE
10"	x 20 FT.	SUCTION SERVICE ONLY	CWSC.1020BF-A	-
12"	x 20 FT.	SUCTION SERVICE, TYPE B	CWSC.1220BF	-
12"	x 20 FT.	SUCTION SERVICE, TYPE A	CWSC.1220BF-A	-



**Bauer Style
Fittings**



**Camlock
Fittings**

Continental Rubber Water Suction Hose Assemblies

RUBBER WATER SUCTION WITH FEMALE CAMLOCK x MALE PIPE THREADED			PART #
2"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWSR.220CKN
3"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWSR.320CKN
4"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWSR.420CKN
6"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWSR.620CKN
8"	x 20 FT.	INCLUDES CRIMPED FEMALE CAMLOCK & KING NIPPLE	CWSR.820CKN

Additional lengths available.



RUBBER WATER SUCTION WITH MALE x FEMALE CAMLOCKS			PART #
2"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWSR.220CE
3"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWSR.320CE
4"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWSR.420CE
6"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWSR.620CE
8"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE CAMLOCKS	CWSR.820CE

Additional lengths available.



RUBBER WATER SUCTION WITH MALE x FEMALE BAUER STYLE FITTINGS			PART #
3"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWSR.320BF
4"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWSR.420BF
6"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWSR.620BF
8"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWSR.820BF
10"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWSR.1020BF-A
12"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER TYPE B FITTINGS	CWSR.1220BF-B
12"	x 20 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER TYPE A FITTINGS	CWSR.1220BF-A

Additional lengths available.



SUCTION & DISCHARGE HOSE

Composite Hose Assemblies



Application: Suction and Discharge of Water, Gasoline, Diesel fuel, Paraffin, Kerosene, Lubricating Oils, 100% aromatics, black oils and heavy lubricants and solvents

Body: Multiple layers of polypropylene fabric, film and polyester barrier layers

Reinforcement: High tensile strength galvanized inner and outer wire

Temperature: -22°F to +176°F (-30°C to +80°C)

Cover: Abrasion resistant PVC impregnated fabric

Features:

- Hose assemblies are hydro-tested and certified at the factory
- Tested following U.S.C.G. certification standards USCG 33CFR 154.00

HOSE SIZE (ID)	MAX LENGTHS (Ft.)	MAX WORKING PRESSURE	BURST PRESSURE	MAX TEMP (°F)	BEND RADIUS (in)	PART # 10 Ft.	PART # 20 Ft.
4"	65	250 PSI	850 PSI	176	16	C040-250B-10-4040SFL	C040-250B-20-4040SFL
6"	65	250 PSI	850 PSI	176	23	C060-250B-10-6060SFL	C060-250B-20-6060SFL
8"	65	250 PSI	850 PSI	176	32	C080-250B-10-8080SFL	C080-250B-20-8080SFL
10"	40	250 PSI	850 PSI	176	40	C0100-250B-10-100100SFL	C0100-250B-20-100100SFL
12"	40	250 PSI	850 PSI	176	47	C0120-250B-10-120120SFL	C0120-250B-20-120120SFL

Approximate Weight of Fix x Floating Flange

HOSE SIZE (ID)	LENGTHS (Ft.)	WEIGHT (Lbs.)	LENGTHS (Ft.)	WEIGHT (Lbs.)
4"	10	71	20	99.2
6"	10	160	20	233.69
8"	10	265	20	381.4
10"	10	365	20	507.06
12"	10	550	20	760.01

Approximate Weight of Vic x Vic

HOSE SIZE (ID)	LENGTHS (Ft.)	WEIGHT (Lbs.)	LENGTHS (Ft.)	WEIGHT (Lbs.)
4"	10	53	20	85.98
6"	10	137	20	209.44
8"	10	230	20	343.92
10"	10	320	20	462.97
12"	10	395	20	696.16



DISCHARGE HOSE

Blue PVC Discharge Hose Assemblies

BLUE PVC DISCHARGE WITH BANDED MALE x FEMALE PIPE THREADED			PART #
1-1/2"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	WD.1550WC
2"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	WD.250WC
3"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	WD.350WC
4"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	WD.450WC
6"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	WD.650WC



BLUE PVC DISCHARGE WITH BANDED MALE x FEMALE CAMLOCKS			PART #
1-1/2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	WD.1550CE
2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	WD.250CE
3"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	WD.350CE
4"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	WD.450CE
6"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	WD.650CE



Red PVC Discharge Hose Assemblies

RED PVC DISCHARGE WITH CRIMPED MALE x FEMALE CAMLOCKS*			PART #
2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDR.250CE
3"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDR.350CE
4"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDR.450CE
4"	x100 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDR.4100CE
6"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDR.650CE
6"	x100 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDR.6100CE

**Banded assemblies available upon request.*



RED PVC DISCHARGE WITH CRIMPED MALE x FEMALE BAUER FITTINGS*			PART #
4"	x 50 FT.	INCLUDES MALE & FEMALE BAUER FITTINGS	CWDR.450BF
4"	x100 FT.	INCLUDES MALE & FEMALE BAUER FITTINGS	CWDR.4100BF
6"	x 50 FT.	INCLUDES MALE & FEMALE BAUER FITTINGS	CWDR.650BF
6"	x100 FT.	INCLUDES MALE & FEMALE BAUER FITTINGS	CWDR.6100BF
8"	x 50 FT.	INCLUDES MALE & FEMALE BAUER FITTINGS	CWDR.850BF

**Banded assemblies available upon request.*



DISCHARGE HOSE

Nitrile/PVC Discharge Hose Assemblies

NITRILE/ PVC DISCHARGE HOSE WITH CRIMPED MALE x FEMALE CAMLOCKS*			PART #
4"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDB.450CE
6"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDB.650CE
8"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDB.850CE

**Camlocks in sizes 8" and above should consult the Manufacturer / Distributor for interchange compatibility.*



NITRILE/ PVC DISCHARGE HOSE WITH CRIMPED BAUER STYLE FITTINGS			PART #
4"	x 50 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWDB.450BF
6"	x 50 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWDB.650BF
8"	x 50 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER STYLE FITTINGS	CWDB.850BF
12"	x 50 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER TYPE B FITTINGS	CWDB.1250BF-B
12"	x 50 FT.	INCLUDES CRIMPED MALE & FEMALE BAUER TYPE A FITTINGS	CWDB.1250BF-A

Call for additional lengths.




Rubber Discharge Hose

RUBBER DISCHARGE HOSE		WORKING PRESURE RATINGS	PART #
1-1/2"	Per FT.	150 PSI	HWRD1H
2"	Per FT.	150 PSI	HWRD2
2-1/2"	Per FT.	150 PSI	HWRD2H
3"	Per FT.	150 PSI	HWRD3
4"	Per FT.	150 PSI	HWRD4
5"	Per FT.	150 PSI	HWRD5
6"	Per FT.	150 PSI	HWRD6
8"	Per FT.	150 PSI	HWRD8
10"	Per FT.	150 PSI	HWRD10
12"	Per FT.	150 PSI	HWRD12

Minimum orders may apply.

Call for additional sizes.

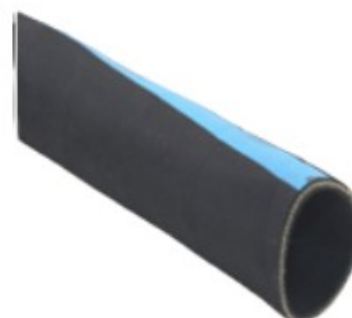

DISCHARGE HOSE

Wellpoint Jet Hose Assemblies

WELLPOINT JET HOSE WITH CRIMPED MALE x FEMALE CAMLOCKS*			PART #
1-1/2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDB.1550CE
2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDB.250CE
2-1/2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDB.2550CE

**Aluminum treaded ends also available upon request.*



Single Jacket Mill Hose (Fire Hose) Assemblies

MILL DISCHARGE HOSE WITH CRIMPED MALE x FEMALE PIPE THREADED*			PART #
1-1/2"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	CWDM.1550WC
2"	x 50 FT.	INCLUDES MALE & FEMALE THREADED COUPLINGS	CWDM.250WC

**Not for fire suppression applications.*



MILL DISCHARGE HOSE WITH CRIMPED MALE x FEMALE CAMLOCKS*			PART #
1-1/2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDM.1550CE
2"	x 50 FT.	INCLUDES MALE & FEMALE CAMLOCKS	CWDM.250CE

**Not for fire suppression applications.*



ACCESSORIES

Dewatering Accessories

SUCTION STRAINERS—GALVANIZED STEEL		PART #
1-1/2"	ROUND HOLE STRAINERS	RHS20
2"	ROUND HOLE STRAINERS	RHS25
3"	ROUND HOLE STRAINERS	RHS35
4"	ROUND HOLE STRAINERS	RHS40
6"	ROUND HOLE STRAINERS	RHS60
8"	ROUND HOLE STRAINERS	RHS80



SUCTION STRAINERS—GALVANIZED STEEL		PART #
1-1/2"	LONG STYLE STRAINERS	RSS20
2"	LONG STYLE STRAINERS	RSS25
3"	LONG STYLE STRAINERS	RSS35
4"	LONG STYLE STRAINERS	RSS40
6"	LONG STYLE STRAINERS	RSS60
8"	LONG STYLE STRAINERS	RSS80



SUCTION STRAINERS—GALVANIZED STEEL		PART #
1-1/2"	SQUARE HOLE STRAINERS	SHS20
2"	SQUARE HOLE STRAINERS	SHS25
3"	SQUARE HOLE STRAINERS	SHS35
4"	SQUARE HOLE STRAINERS	SHS40
6"	SQUARE HOLE STRAINERS	SHS60
8"	SQUARE HOLE STRAINERS	SHS80



PUMP DIAPHRAGMS		PART #
3"	RED NATURAL RUBBER DIAPHRAGM FOR MUD HOG PUMP	3RED PUMP
4"	RED NATURAL RUBBER DIAPHRAGM FOR MUD HOG PUMP	4RED PUMP



HEADER SLEEVES		PART #
6-5/8"	HEADER SLEEVE FOR WELLPOINTING	HEADER SLEEVE 6-5/8
8-5/8"	HEADER SLEEVE FOR WELLPOINTING	HEADER SLEEVE 8-5/8



FLANGE GASKET KITS		PART #
4"	INCLUDES GASKET & BOLTS	BKFL4 BOLT KIT
6"	INCLUDES GASKET & BOLTS	BKFL6 BOLT KIT
8"	INCLUDES GASKET & BOLTS	BKFL8 BOLT KIT
10"	INCLUDES GASKET & BOLTS	BKFL10 BOLT KIT
12"	INCLUDES GASKET & BOLTS	BKFL12 BOLT KIT



Aluminum and Polypropylene Cam & Groove Fittings

ADAPTER x FEMALE NPT			(A) PART #	(P) PART #
PART A	3/4"	ADAPTER x FEMALE NPT	AA075	PA075
PART A	1"	ADAPTER x FEMALE NPT	AA100	PA100
PART A	1-1/2"	ADAPTER x FEMALE NPT	AA150	PA150
PART A	2"	ADAPTER x FEMALE NPT	AA200	PA200
PART A	3"	ADAPTER x FEMALE NPT	AA300	PA300
PART A	4"	ADAPTER x FEMALE NPT	AA400	PA400
PART A	6"	ADAPTER x FEMALE NPT	AA600	N/A
PART A	8"	ADAPTER x FEMALE NPT	AA800	N/A
COUPLER x MALE NPT			(A) PART #	(P) PART #
PART B	3/4"	COUPLER x MALE NPT	AB075	PB075
PART B	1"	COUPLER x MALE NPT	AB100	PB100
PART B	1-1/2"	COUPLER x MALE NPT	AB150	PB150
PART B	2"	COUPLER x MALE NPT	AB200	PB200
PART B	3"	COUPLER x MALE NPT	AB300	PB300
PART B	4"	COUPLER x MALE NPT	AB400	PB400
PART B	6"	COUPLER x MALE NPT	AB600	N/A
PART B	8"	COUPLER x MALE NPT	AB800	N/A
COUPLER x HOSE SHANK			(A) PART #	(P) PART #
PART C	3/4"	COUPLER x HOSE SHANK	AC075	PC075
PART C	1"	COUPLER x HOSE SHANK	AC100	PC100
PART C	1-1/2"	COUPLER x HOSE SHANK	AC150	PC150
PART C	2"	COUPLER x HOSE SHANK	AC200	PC200
PART C	3"	COUPLER x HOSE SHANK	AC300	PC300
PART C	4"	COUPLER x HOSE SHANK	AC400	PC400
PART C	6"	COUPLER x HOSE SHANK	AC600	N/A
PART C	8"	COUPLER x HOSE SHANK	AC800	N/A
COUPLER x FEMALE NPT			(A) PART #	(P) PART #
PART D	3/4"	COUPLER x FEMALE NPT	AD075	PD075
PART D	1"	COUPLER x FEMALE NPT	AD100	PD100
PART D	1-1/2"	COUPLER x FEMALE NPT	AD150	PD150
PART D	2"	COUPLER x FEMALE NPT	AD200	PD200
PART D	3"	COUPLER x FEMALE NPT	AD300	PD300
PART D	4"	COUPLER x FEMALE NPT	AD400	PD400
PART D	6"	COUPLER x FEMALE NPT	AD600	N/A
PART D	8"	COUPLER x FEMALE NPT	AD800	N/A



NECO 8" & 12"
available for all configurations!

Call for additional sizes on all Cam & Groove Fittings, as well as Stainless Steel and Brass.

Aluminum and Polypropylene Cam & Groove Fittings

ADAPTER x HOSE SHANK			(A) PART #	(P) PART #
PART E	3/4"	ADAPTER x HOSE SHANK	AE075	PE075
PART E	1"	ADAPTER x HOSE SHANK	AE100	PE100
PART E	1-1/2"	ADAPTER x HOSE SHANK	AE150	PE150
PART E	2"	ADAPTER x HOSE SHANK	AE200	PE200
PART E	3"	ADAPTER x HOSE SHANK	AE300	PE300
PART E	4"	ADAPTER x HOSE SHANK	AE400	PE400
PART E	6"	ADAPTER x HOSE SHANK	AE600	N/A
PART E	8"	ADAPTER x HOSE SHANK	AE800	N/A
ADAPTER x MALE NPT			(A) PART #	(P) PART #
PART F	3/4"	ADAPTER x MALE NPT	AF075	PF075
PART F	1"	ADAPTER x MALE NPT	AF100	PF100
PART F	1-1/2"	ADAPTER x MALE NPT	AF150	PF150
PART F	2"	ADAPTER x MALE NPT	AF200	PF200
PART F	3"	ADAPTER x MALE NPT	AF300	PF300
PART F	4"	ADAPTER x MALE NPT	AF400	PF400
PART F	6"	ADAPTER x MALE NPT	AF600	N/A
PART F	8"	ADAPTER x MALE NPT	AF800	N/A
DUST CAP			(A) PART #	(P) PART #
PART DC	3/4"	DUST CAP	ADC075	PDC075
PART DC	1"	DUST CAP	ADC100	PDC100
PART DC	1-1/2"	DUST CAP	ADC150	PDC150
PART DC	2"	DUST CAP	ADC200	PDC200
PART DC	3"	DUST CAP	ADC300	PDC300
PART DC	4"	DUST CAP	ADC400	PDC400
PART DC	6"	DUST CAP	ADC600	N/A
PART DC	8"	DUST CAP	ADC800	N/A
DUST PLUG			(A) PART #	(P) PART #
PART DP	3/4"	DUST PLUG	ADP075	PDP075
PART DP	1"	DUST PLUG	ADP100	PDP100
PART DP	1-1/2"	DUST PLUG	ADP150	PDP150
PART DP	2"	DUST PLUG	ADP200	PDP200
PART DP	3"	DUST PLUG	ADP300	PDP300
PART DP	4"	DUST PLUG	ADP400	PDP400
PART DP	6"	DUST PLUG	ADP600	N/A
PART DP	8"	DUST PLUG	ADP800	N/A



NECO 8" & 12"
available for all configurations!

See clamps, banding material, and tools on pages 21-22.

ACCESSORIES

Camlock Gaskets, Reducers, and Increases

CAMLOCK GASKETS		BUNA PART #	EPDM PART #	VITON PART #
SIZE	3/4"	G075BU	G075EP	G075VI
SIZE	1"	G100BU	G100EP	G100VI
SIZE	1-1/2"	G150BU	G150EP	G150VI
SIZE	2"	G200BU	G200EP	G200VI
SIZE	3"	G300BU	G300EP	G300VI
SIZE	4"	G400BU	G400EP	G400VI
SIZE	6"	G600BU	N/A	N/A



SPOOL ADAPTERS		PART #
SIZE	1-1/2" x 2"	SA15X20AL
SIZE	2" x 2"	SA20X20AL
SIZE	2" x 3"	SA20X30AL
SIZE	3" x 3"	SA30X30AL
SIZE	3" x 4"	SA30X40AL
SIZE	4" x 4"	SA40X40AL
SIZE	6" x 4"	SA60X40AL
SIZE	6" x 6"	SA60X60AL



CAM REDUCERS		PART #
SIZE	2" x 1-1/2"	20CX15AAL
SIZE	3" x 2"	30CX20AAL
SIZE	4" x 2"	40CX20AAL
SIZE	4" x 3"	40CX30AAL
SIZE	6" x 4"	60CX40AAL



DOUBLE FEMALE COUPLERS		PART #
SIZE	1-1/2" x 1-1/2"	15CX15CAL
SIZE	2" x 2"	20CX20CAL
SIZE	3" x 3"	30CX30CAL
SIZE	4" x 4"	40CX40CAL
SIZE	6" x 6"	60CX60CAL



MALE X FEMALE 90° ELBOWS		PART #
SIZE	1-1/2"	150DA-90AL
SIZE	2"	200DA-90AL
SIZE	3"	300DA-90AL
SIZE	4"	400DA-90AL
SIZE	6"	600DA-90AL



MALE X FEMALE 45° ELBOWS		PART #
SIZE	1-1/2"	150DA-45AL
SIZE	2"	200DA-45AL
SIZE	3"	300DA-45AL
SIZE	4"	400DA-45AL
SIZE	6"	600DA-45AL



Call for additional sizes and configurations.

ACCESSORIES

Flanges

FLANGE x MALE		PART #
SIZE	2"	FLA20AL
SIZE	3"	FLA30AL
SIZE	4"	FLA40AL
SIZE	6"	FLA60AL



Call for additional sizes.

FLANGE x FEMALE CAMLOCK ADAPTERS		PART #
SIZE	2"	FLC20AL
SIZE	3"	FLC30AL
SIZE	4"	FLC40AL
SIZE	6"	FLC60AL



Call for additional sizes.

ANSI 150# Flange Dimensions

ASME/ANSI B16.5 FLANGES AND BOLT DIMENSIONS — CLASS 150					
Nominal Pipe Size NPS (inches)	Class 150				
	Diameter of Flange (inches)	No. of Bolts	Diameter of Bolts (inches)	Diameter of Bolt Holes (inches)	Bolt Circle (inches)
1/4	3-3/8	4	1/2	0.62	2-1/4
1/2	3-1/2	4	1/2	0.62	2-3/8
3/4	3-7/8	4	1/2	0.62	2-3/4
1	4-1/4	4	1/2	0.62	3-1/8
1-1/4	4-5/8	4	1/2	0.62	3-1/2
1-1/2	5	4	1/2	0.62	3-7/8
2	6	4	5/8	0.75	4-3/4
2-1/2	7	4	5/8	0.75	5-1/2
3	7-1/2	4	5/8	0.75	6
3-1/2	8-1/2	8	5/8	0.75	7
4	9	8	5/8	0.75	7-1/2
5	10	8	3/4	0.88	8-1/2
6	11	8	3/4	0.88	9-1/2
8	13-1/2	8	3/4	0.88	11-3/4
10	16	12	7/8	1	14-1/4
12	19	12	7/8	1	17
14	21	12	1	1.12	18-3/4
16	23-1/2	16	1	1.12	21-1/4
18	25	16	1-1/8	1.25	22-3/4
20	27-1/2	20	1-1/8	1.25	25
24	32	20	1-1/4	1.38	29-1/2

ACCESSORIES & PIPE ASSEMBLIES

Bauer A-Style Ball and Socket Fittings

BAUER A-STYLE COUPLING SETS		PART #
10"	COUPLING SET—INCLUDES MALE & FEMALE HOSE ENDS, CLAMP RING & RUBBER O-RING	BAUER A10 BXS
12"	COUPLING SET—INCLUDES MALE & FEMALE HOSE ENDS, CLAMP RING & RUBBER O-RING	BAUER A12 BXS

Call for additional configurations.



Bauer A&B-Style Adapters — Full Line Available!

Bauer HDPE Bypass Pipe Assemblies SDR17

Rated Full Vacuum at 72°F



A-STYLE PIPE ASSEMBLIES



B-STYLE PIPE ASSEMBLIES



MALE AND FEMALE HDPE POLYCRIMP WELD FITTINGS AVAILABLE IN 4"-12" TYPES A & B

- B-Style fabricated with European Made Bauer Style Fittings
- 80 PSI @ 72° F Working Pressure
- Full Vacuum- 29" HG @ 72° F
- B-Style HDPE.620BF 6" x 20 ft.
- B-Style HDPE.820BF 8" x 20 ft.
- 12" A & B Style Couplings Available for Pipe Assemblies on Request

APPLICATIONS:

- Reclaimed Water
- Sewer Bypass
- Drainage
- Irrigation
- Dewatering

STACKABLE PIPE RACK	PART #
FOR 20 FT. HOSE OR PIPE STICKS	PIPERACK-20Y



ACCESSORIES

Bauer B-Style Ball and Socket Fittings

BAUER B-STYLE COUPLINGS		Socket End (Includes O-ring) PART #	Ball & Lever End PART #
3"	GALVANIZED STEEL HOSE ENDS	BAUER SHE3	BAUER BHE3
4"	GALVANIZED STEEL HOSE ENDS	BAUER SHE4	BAUER BHE4
6"	GALVANIZED STEEL HOSE ENDS	BAUER SHE6	BAUER BHE6
8"	GALVANIZED STEEL HOSE ENDS	BAUER SHE8	BAUER BHE8
12"	GALVANIZED STEEL HOSE ENDS	BAUER SHE12	BAUER BHE12



Call for additional sizes.

BAUER B-STYLE COUPLING RUBBER O-RING		PART #
3"	RUBBER O-RING	BAUER S4 3 O-RING
4"	RUBBER O-RING	BAUER S4 4 O-RING
6"	RUBBER O-RING	BAUER S4 6 O-RING
8"	RUBBER O-RING	BAUER S4 8 O-RING



**BALL & LEVER x
FLANGE**



SOCKET x FLANGE



**BALL & LEVER x PIPE
LONG ADAPTER**



**BALL & LEVER x PIPE
STANDARD ADAPTER**



SOCKET x PIPE



DECREASER



INCREASER



90° ELBOW



Y-ADAPTER



**BALL & LEVER x
SHALLOW STRAINER**



PLUG



CAP



LEVER

ACCESSORIES

Tee Floats

SDR17 HDPE TEE FLOAT PIPES WITH BAUER FITTING		PART #
4"	HDPE TEE FLOAT STRAINER WITH MALE BAUER FITTING AND LEVER	HDPE DR17 4T-B
6"	HDPE TEE FLOAT STRAINER WITH MALE BAUER FITTING AND LEVER	HDPE DR17 6T-B
8"	HDPE TEE FLOAT STRAINER WITH MALE BAUER FITTING AND LEVER	HDPE DR17 8T-B



SDR17 HDPE TEE FLOAT PIPES WITH MALE PIPE THREAD		PART #
4"	HDPE TEE FLOAT STRAINER WITH MALE NPT PIPE THREAD	HDPE DR17 4T-KN
6"	HDPE TEE FLOAT STRAINER WITH MALE NPT PIPE THREAD	HDPE DR17 6T-KN
8"	HDPE TEE FLOAT STRAINER WITH MALE NPT PIPE THREAD	HDPE DR17 8T-KN



Additional Tee Floats Available



TEE FLOAT x FEMALE CAMLOCK



TEE FLOAT x MALE CAMLOCK



TEE FLOAT x 150# FLANGE

Vacuum Relief Valves



3/4" INLET
0-27 IN HG
BVRVL



1" INLET
0-27 IN HG
BVRV1

WATER HOSES & ACCESSORIES

Contractor Water Hoses & Accessories

CONTINENTAL FRONTIER WATER HOSE ASSEMBLIES	PART #
5/8" x 25 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.5825GHT
5/8" x 50 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.5850GHT
5/8" x 75 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.5875GHT
5/8" x 100 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.58100GHT
3/4" x 25 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.7525GHT
3/4" x 50 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.7550GHT
3/4" x 75 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.7575GHT
3/4" x 100 FT. BLACK RUBBER HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	WD.75100GHT

Call for additional sizes.



CONTINENTAL PLIOVIC PLUS WATER HOSE ASSEMBLIES	PART #
5/8" x 50 FT. BLUE PVC HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	HAPB-1050GHT
3/4" x 50 FT. BLUE PVC HEAVY DUTY ASSEMBLY WITH GARDEN THREAD ENDS. MADE IN USA.	HAPB-1250GHT

Call for additional sizes.



WATER HOSE ACCESSORIES	PART #
2" IPT BRASS NOZZLE 12" LENGTH	BN20
RUBBER GARDEN HOSE WASHERS	GH-W
GARDEN HOSE SHUT-OFF VALVE	05V
GARDEN HOSE WYE WITH SHUT-OFF	15Y
MALE GARDEN HOSE x 1/2" FEMALE NPT	MG8FP
MALE GARDEN HOSE x 3/4" MALE NPT	MG12MP
MALE GARDEN HOSE UNION	MGMG
FEMALE GARDEN HOSE x FEMALE NPT	FG12FP
FEMALE GARDEN HOSE x FEMALE GARDEN HOSE	FGXFG
GARDEN HOSE QUICK DISCONNECT SET	09QC



BN20



05V



15Y



MG8FP



MG12MP



MGMG



FG12FP



FGXFG



09QC

WATER HOSE ACCESSORIES

Nozzles & Hydrant Adapters

NOZZLES	PART #
INSULATED GARDEN HOSE NOZZLE	572TFR
STANDARD GARDEN HOSE NOZZLE	573TF
1-1/2" IPT ADJUSTABLE FOG NOZZLE	1575 IPT
ALUMINUM FOG NOZZLE 1" NPSH	FFN100
BRASS FOG NOZZLE 1" NPSH	BFN100
BRASS FOG NOZZLE 1-1/2" NST	BFN150NST
BRASS FOG NOZZLE 2-1/2" NST	BFN250NST



572TFR



573TF



1575 IPT



FFN100



BFN100

BRASS HYDRANT ADAPTERS	PART #
1-1/2" FEMALE NST x MALE GARDEN HOSE	15FNHX75MGH
2-1/2" FEMALE NST x MALE GARDEN HOSE	25FNHX75MGH
1-1/2" FEMALE NST x 1" MALE NPT	15FNHX10MP
1-1/2" FEMALE NST x 1-1/2" MALE NPT	15FNHX15MP
1-1/2" FEMALE NST x 2" MALE NPT	15FNHX2MP
2-1/2" FEMALE NST x 3/4" MALE NPT	25FNHX75MP
2-1/2" FEMALE NST x 1" MALE NPT	25FNHX10MP
2-1/2" FEMALE NST x 1-1/2" MALE NPT	25FNHX15MP
2-1/2" FEMALE NST x 2" MALE NPT	25FNHX2MP
2-1/2" FEMALE NST x 2-1/2" MALE NPT	25FNHX25MP
1-1/2" FEMALE NST x 1-1/2" FEMALE NPT	15FNHX15FP
2-1/2" FEMALE NST x 2-1/2" FEMALE NPT	25FNHX25FP
2-1/2" FEMALE NST x 1-1/2" MALE NST	25FNHX15MNH
2-1/2" FEMALE NST x 1-1/2" MALE NPT	25FNHX15MPSW
2-1/2" FEMALE NST x 2" MALE NPT	25FNHX2MPSW
2-1/2" FEMALE NST x 2-1/2" MALE NPT	25FNHX25MPSW
2-1/2" FEMALE NST x 3" MALE NPT	25FNXX30MPSW

BRASS HYDRANT ADAPTERS	PART #
2-1/2" FEMALE NST x 2-1/2" FEMALE NPSH	25FNHX25FPSW
1-1/2" MALE NST x 1-1/2" MALE NPT	15MNHX15MP
1-1/2" MALE NST x 2" MALE NPT	15MNHX2MP
2-1/2" MALE NST x 1-1/2" MALE NPT	25MNHX15MP
2-1/2" MALE NST x 2" MALE NPT	25MNHX2MP
2-1/2" MALE NST x 2-1/2" MALE NPT	25MNHX25MP
2-1/2" MALE NST x 3" MALE NPT	25MNHX3MP
1-1/2" MALE NST x 1-1/2" MALE NST	15MNHX15MNH
2-1/2" MALE NST x 2-1/2" MALE NST	25MNHX25MNH
1-1/2" MALE NST x 1-1/2" FEMALE NPT	15MNHX15FP
1-1/2" MALE NST x 2" FEMALE NPT	15MNHX2FP
2-1/2" MALE NST x 1-1/2" FEMALE NPT	25MNHX15FP
2-1/2" MALE NST x 2" FEMALE NPT	25MNHX2FP
2-1/2" MALE NST x 2-1/2" FEMALE NPT	25MNHX25FP
2-1/2" MALE NST x 3" FEMALE NPT	25MNHX3FP



A



B



C



D



E



F



G



H

ACCESSORIES

Worm Gear Clamps

WORM GEAR CLAMPS SOLD IN BOX OF 10		PART #	WORM GEAR CLAMPS SOLD IN BOX OF 10		PART #
1/2" to 1-1/16"	SERIES 9/16" HY-GEAR 63-4	6310	1" to 4"	SERIES 9/16" HY-GEAR 63-4	6340
1/2" to 1-1/4"	SERIES 9/16" HY-GEAR 63-4	6312	1-3/4" to 3-3/4"	SERIES 9/16" HY-GEAR 63-4	6352
3/4" to 1-1/2"	SERIES 9/16" HY-GEAR 63-4	6316	2-1/2" to 4-1/2"	SERIES 9/16" HY-GEAR 63-4	6364
3/4" to 1-3/4"	SERIES 9/16" HY-GEAR 63-4	6320	3" to 5"	SERIES 9/16" HY-GEAR 63-4	6372
1" to 2"	SERIES 9/16" HY-GEAR 63-4	6324	3-5/8" to 5-1/2"	SERIES 9/16" HY-GEAR 63-4	6380
1-5/16" to 2-1/4"	SERIES 9/16" HY-GEAR 63-4	6328	4-1/2" to 6"	SERIES 9/16" HY-GEAR 63-4	6388
1-1/2" to 2-1/2"	SERIES 9/16" HY-GEAR 63-4	6332	4-3/4" to 6-1/2"	SERIES 9/16" HY-GEAR 63-4	6396



Material Specifications

Screw: 5/16" Hex Head; 300 stainless.

Band: 9/16"; 300 stainless.

Installation Torque: 35 in-lbs. (4Nm).

Call for additional sizes.

Snaplock Quick Release Clamps

SNAPLOCK QUICK RELEASE CLAMPS	
OD SIZE	PART #
2-5/16" to 8-1/2"	56128 or QR128H
2" to 10"	56152



Material Specifications

Screw: 5/16" Hex Head; Plated carbon steel.

Housing: 200 stainless.

Bridge: Plated carbon steel.

Band: 9/16"; 200 stainless.

Installation Torque: 30 in-lbs. (3.4Nm).

Call for additional sizes.

T-Bolt Clamps

T-BOLT CLAMPS STYLE STBC		T-BOLT CLAMPS STYLE STBC		T-BOLT CLAMPS STYLE STBC	
OD SIZE	PART #	OD SIZE	PART #	OD SIZE	PART #
1.250" to 1.4063"	STBC131	2.75" to 3.06"	STBC300	5.50" to 5.81"	STBC575
1.31" to 1.56"	STBC150	2.88" to 3.19"	STBC312	5.75" to 6.06"	STBC600
1.44" to 1.69"	STBC163	3.00" to 3.31"	STBC325	6.00" to 6.31"	STBC625
1.56" to 1.81"	STBC175	3.25" to 3.56"	STBC350	6.25" to 6.56"	STBC650
1.69" to 1.94"	STBC188	3.38" to 3.69"	STBC362	6.50" to 6.81"	STBC675
1.81" to 2.06"	STBC200	3.50" to 3.81"	STBC375	6.75" to 7.06"	STBC700
1.93" to 2.18"	STBC212	3.56" to 3.87"	STBC382	7.25" to 7.56"	STBC750
2.06" to 2.31"	STBC225	3.75" to 4.06"	STBC400	7.75" to 8.06"	STBC800
2.19" to 2.50"	STBC238	4.00" to 4.30"	STBC425	8.00" to 8.31"	STBC825
2.31" to 2.62"	STBC250	4.25" to 4.56"	STBC450	8.25" to 8.56"	STBC850
2.31" to 2.62"	STBC256	4.50" to 4.81"	STBC475	8.63" to 8.94"	STBC888
2.37" to 2.68"	STBC263	4.75" to 5.06"	STBC500	10.63" to 10.94"	STBC1088
2.50" to 2.81"	STBC275	5.00" to 5.31"	STBC525	12.63" to 12.94"	STBC1288
2.63" to 2.94"	STBC288	5.25" to 5.56"	STBC550		



Material Specifications

Bolt: Can be applied with a standard 7/16" socket wrench, 300 stainless.

Band: 3/4" wide, .25" thick, 300 series stainless steel.

Installation Torque: 50 in-lbs.

ACCESSORIES

Center Punch Clamps

SIZE	GALVANIZED PART #	201 STAINLESS PART #	SIZE	GALVANIZED PART #	201 STAINLESS PART #
13/16" ID x 3/8" WIDE	P-3	P-3-S	2-3/4" ID x 5/8" WIDE	P-11	P-11-S
1-3/8" ID x 3/8" WIDE	P-311	P-311-S	3" ID x 5/8" WIDE	P-12	P-12-S
1" ID 5/8" WIDE	P-4	P-4-S	3-1/2" ID x 5/8" WIDE	P-14	P-14-S
1-1/4" ID x 5/8" WIDE	P-5	P-5-S	4" ID x 5/8" WIDE	P-16	P-16-S
1-1/2" ID x 5/8" WIDE	P-6	P-6-S	4-1/2" ID x 5/8" WIDE	P-18	P-18-S
1-3/4" ID x 5/8" WIDE	P-7	P-7-S	5" ID x 5/8" WIDE	P-20	P-20-S
2" ID x 5/8" WIDE	P-8	P-8-S	6" ID x 5/8" WIDE	P-24	P-24-S
2-1/4" ID x 5/8" WIDE	P-9	P-9-S	7" ID x 5/8" WIDE	P-28	P-28-S
2-1/2" ID x 5/8" WIDE	P-10	P-10-S	8" ID x 5/8" WIDE	P-32	P-32-S
			PUNCH LOK® TOOL	T300-0	



PUNCH LOK® TOOL

J-Series or Jr. Clamps

SIZE	201 STAINLESS PART #	SIZE	201 STAINLESS PART #
1" ID x 1/2" WIDE	JS203	3-1/2" ID x 3/4" WIDE	JS212
1-1/4" ID x 1/2" WIDE	JS204	4" ID x 3/4" WIDE	JS213
1-1/2" ID x 5/8" WIDE	JS205	4-1/2" ID x 3/4" WIDE	JS214
1-3/4" ID x 5/8" WIDE	JS206	5" ID x 3/4" WIDE	JS215
2" ID x 5/8" WIDE	JS207	6" ID x 3/4" WIDE	JS216
2-1/4" ID x 5/8" WIDE	JS208	6-1/2" ID x 3/4" WIDE	JS217
2-1/2" ID x 5/8" WIDE	JS209	7" ID x 3/4" WIDE	JS218
2-3/4" ID x 3/4" WIDE	JS210	8" ID x 3/4" WIDE	JS219
3" ID x 3/4" WIDE	JS211	BANDED JR. TOOL	C002
		GRIP CLAMP TOOL	GRIP CLAMP TOOL



BANDED JR. TOOL



GRIP CLAMP TOOL

Ultra Lok® Clamps & Band and Buckle

Ultra Lok® Clamps

SIZE	201 STAINLESS PART #
5" ID x 3/4" WIDE	UL215
7" ID x 3/4" WIDE	UL218
9" ID x 3/4" WIDE	UL228
CORDLESS TOOL	UL4000-D

Band and Buckle



CORDLESS TOOL

Call for additional sizes.

SIZE	STAINLESS BAND PART #	STAINLESS BUCKLE PART #
1/2" WIDE x 100 FT.	C204	C254
5/8" WIDE x 100 FT.	C205	C255
3/4" WIDE x 100 FT.	C206	C256
WING-NUT TOOL	C001	



BAND



BUCKLE



WING-NUT TOOL

ACCESSORIES

Double Bolt Clamps

FEATURES:

- Inner surface has dual gripping ridges
- Bolt lugs are reinforced to prevent bending out of alignment
- Torque values for clamps are based on dry bolts
- The use of lubricant on bolts will adversely effect clamp performance
- Measure hose O.D. accurately before ordering clamps
- Consult Amazon Hose when using double bolt clamps on helical wire hose



HOSE O.D.		TORQUE in ft. lbs.	PLATED IRON PART #
from	to		
1-8/64"	1-12/64"	15	J48
1-12/64"	1-24/64"	21	J49
1-28/64"	1-34/64"	21	JX49
1-40/64"	1-52/64"	40	DL14
1-48/64"	2-3/64"	27	DL20
2-7/64"	2-19/64"	27	DL24 ¹
2-20/64"	2-40/64"	40	DL32 ¹
2-32/64"	2-48/64"	40	DL275
2-48/64"	3-4/64"	60	DL306
3-4/64"	3-24/64"	60	DL328
3-16/64"	3-32/64"	60	DL350

¹ Investment cast carbon steel.



Double Bolt Clamps with Saddles

HOSE O.D.		TORQUE in ft. lbs.	PLATED IRON PART #
from	to		
3-32/64"	3-52/64"	40	400
3-50/64"	4-4/64"	40	431
4-2/64"	4-18/64"	40	463
4-16/64"	4-60/64"	60	525
4-32/64"	5-16/64"	60	550
5-8/64"	5-44/64"	60	600
5-44/64"	5-60/64"	60	639
5-60/64"	6-32/64"	60	675
6-32/64"	7-36/64"	60	769
7-44/64"	8-12/64"	125	818
8-16/64"	8-56/64"	125	875
8-60/64"	9-56/64"	125	988
9-60/64"	11-24/64"	125	1125
11-12/64"	13"	125	1275
12-12/64"	14"	200	1360
13-12/64"	15"	200	1450
15-4/64"	17-32/64"	260	1700



HOSE

Hydro Excavation & Vacuum Truck Hoses

Corrugated SBR Suction Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS at 68°F	MAX TEMP (°F)	VACUUM RATING (in/Hg) at 68°F	BEND RADIUS (in) at 68°F	PART #
2"	50 / 100	32 PSI	150	29"	1.5	HMAR2
3"	50 / 100	28 PSI	150	29"	2.5	HMAR3
4"	50 / 100	26 PSI	150	29"	4.5	HMAR4
5"	50 / 100	30 PSI	150	28"	9	HMAR5
6"	20 / 50 / 100	19 PSI	150	28"	9.5	HMAR6
8"	20 / 50	19 PSI	150	27"	14	HMAR8




Call for additional sizes.



Corrugated Rubber/Urethane Suction Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS at 68°F	MAX TEMP (°F)	VACUUM RATING (in/Hg) at 68°F	BEND RADIUS (in) at 68°F	PART #
2"	50 / 100	40 PSI	158	29"	2.5	ARVAC SW 200
3"	50 / 100	30 PSI	158	29"	6	ARVAC SW 300
4"	50 / 100	30 PSI	158	29"	7	ARVAC SW 400
5"	50 / 100	30 PSI	158	29"	8	ARVAC SW 500
6"	50 / 100	25 PSI	158	29"	8	ARVAC SW 600
8"	20 / 50	20 PSI	158	29"	18	ARVAC SW 800

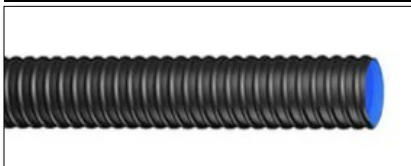

Call for additional sizes.

High Temp Corrugated EPDM Suction Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS	MAX TEMP (°F)	VACUUM RATING (in/Hg)	BEND RADIUS (in)	PART #
4"	100	30 PSI	220	28"	6	2800-4
6"	100	30 PSI	220	28"	10	2800-6



Call for additional sizes.

HOSE & ACCESSORIES

Hydro Excavation & Vacuum Truck Hoses & Accessories

Boomer Heavy-Duty Rubber Suction Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS at 68°F	MAX TEMP (°F)	VACUUM RATING (in/Hg) at 68°F	BEND RADIUS (in) at 68°F	PART #
2"	100	150 PSI	212	30"	6	T704HA200
3"	100	150 PSI	212	30"	9	T704HA300
4"	100	150 PSI	212	30"	12	T704HA400
5"	100	150 PSI	212	30"	15	T704HA500
6"	50 / 100	150 PSI	212	30"	24	T704HA600
8"	35 / 50 / 100	150 PSI	212	30"	32	T704HA800
10"	35	150 PSI	212	30"	40	T704HA1000



Quick Release Lever Valves

SIZE (ID)	WORKING PRESSURE RATINGS	TEMP RANGE (°C)	PART #
2"	90 PSI	-15 to 80	PPA 141
3"	90 PSI	-15 to 80	PPA 144
4"	90 PSI	-15 to 80	PPA 142
6"	90 PSI	-15 to 80	PPA 145
4"	90 PSI	-15 to 80	PPA 142/Flange
6"	90 PSI	-15 to 80	PPA 145/Flange


**Replacement levers available.*



FNPT x FNPT



FNPT x FLANGE

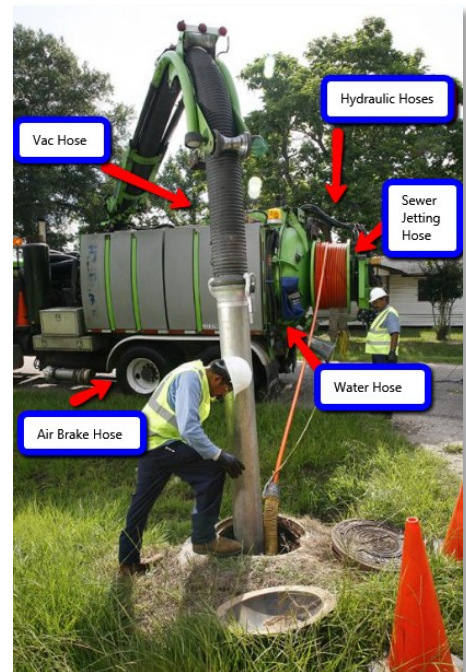

Sewer Jetting Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS	TEMP (°F)	VACUUM RATING	BEND RADIUS (in)	PART #
1/4"	400 / 500 / 600	4000 PSI	160	N/A	2.5	LL4-4000
3/8"	400 / 500 / 600	4000 PSI	160	N/A	3	LL6-4000
1/2"	400 / 500 / 600	4000 PSI	150	N/A	4	LL8-4000
3/4"	400 / 500 / 600	2500 PSI	150	N/A	5	HJSJL
1"	400 / 500 / 600	2500 PSI	150	N/A	6	HJSJ1



LL4000 SERIES



HJSJ SERIES

Septic Tank Suction Hose

EPDM Suction & Discharge Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS	TEMP (°F)	VACUUM RATING (in/Hg)	BEND RADIUS (in)	PART #
2"	100	50 PSI	160	28"	5	HW3002
3"	100	45 PSI	160	26"	7	HW3003
4"	100	40 PSI	160	26"	11.5	HW3004
6"	20 / 100	30 PSI	160	24"	20	HW3006



Hi-Vac Hose

HOSE SIZE (ID)	STANDARD LENGTHS (Ft.)	WORKING PRESSURE RATINGS	TEMP (°F)	VACUUM RATING (in/Hg)	BEND RADIUS (in)	PART #	PART # WITH CUFF 3 FT. ASSEMBLY
2"	25 / 50 / 60	26 PSI	140	29"	3.75	HVHV2	HVTT2CUFF3
3"	25 / 50 / 60	12 PSI	140	29"	8	HVHV3	HVTT3CUFF3
3" Collar Clamp with 20 ft. Rope (this combo is often used with the 3" x 3 ft. assemblies)						KBC300	



COLLAR CLAMP W/ ROPE



Tsurumi Submersible Pumps

We're now a proud distributor for the world leader of submersible pumps to the construction and rental market, Tsurumi outlasts the competition in pump life, product offering and cost savings.



SINGLE PHASE SUBMERSIBLE PUMPS	DESCRIPTION
HS Series	Submersible pump designed for water, wastewater and light slurry pumping. Residential, commercial, industrial & construction dewatering applications.
LB Series	Rugged dewatering pumps built to fit into 8" pipes in 2/3HP, 1HP, and 2HP.
LSC Series	Low level residue pump capable of pumping water continuously at 1/16 inches.
LSR Series	Low level high volume residue pump capable of pumping down to 1/4 inches.
NK Series	Contractor pumps for high volume single phase dewatering applications.
Utility Series	With an air filled motor, these lightweight pumps are suitable for all your general dewatering applications.
UT/UTZ Series	Prevents clogging by solids and fibrous materials through the use of a vortex impeller and wide passage.
THREE PHASE SUBMERSIBLE PUMPS	DESCRIPTION
LBT Series	Rugged dewatering pumps built to fit into 8" pipes in 1HP and 2HP.
KTZ/KTZE Series	Construction pumps capable of converting from high head to high volume in 2HP -15HP designs.
LH Series	High head pumps providing medium to high flows. Ideal for generating plants and mining operations.
LHW Series	Rental & supply companies preferred choice for contractor ready slimline products.

Tsurumi Submersible Pumps

HS2.4S Manual Electric Submersible Pump

Durable trash pumps in 2 inches discharge & 1/2HP. Designed to pump water containing sand, solids and debris with minimal wear and clogging.

- Built-in shaft mounted agitator suspends solids.
- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Dual inside mechanical seal with SiC faces for longer life.
- Oil Lifter provides lubrication of the seal faces. (Patented)
- V-Ring Seal design protects mechanical seal from abrasive particles.

Technical Specifications:

- | | |
|---------------------------|--|
| • Motor Output (HP): 1/2 | • Cable Length (ft.): 20 |
| • Phase: Single | • Dimension (Dia x H, in.): 10-1/16 x 12-15/16 |
| • Discharge Bore (in.): 2 | • Continuous Running Water Level (in.): 3.5 |
| • Voltage/Amp: 110/5.4 | • Pump Weight (lbs.): 30 |

HS2.4S



HS3.75S Manual Electric Submersible Pump

Durable trash pumps in 3 inches discharge & 1HP. Designed to pump water containing sand, solids and debris with minimal wear and clogging.

- Built-in shaft mounted agitator suspends solids.
- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Dual inside mechanical seal with SiC faces for longer life.
- Oil Lifter provides lubrication of the seal faces. (Patented)
- V-Ring Seal design protects mechanical seal from abrasive particles.

Technical Specifications:

- | | |
|---------------------------|--|
| • Motor Output (HP): 1 | • Cable Length (ft.): 32 |
| • Phase: Single | • Dimension (Dia x H, in.): 12-7/16 x 15-1/4 |
| • Discharge Bore (in.): 3 | • Continuous Running Water Level (in.): 3.5 |
| • Voltage/Amp: 115/9.6 | • Pump Weight (lbs.): 49 |

HS3.75S



LB-480 Manual Electric Submersible Pump

LB-480 Slimline design pump allows to fit into 8" pipes. Powerful pumps built with durable materials in an easy handling design. Top discharge provides maximum motor cooling efficiency allowing continuous duty operation at low water levels and extended dry-run capability.

- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance.
- Dual Inside Mechanical Seal With SiC faces provides longer operational life.
- Oil Lifter provides lubrication of the seal faces. (Patented)
- V-Ring Seal design protects mechanical seal from abrasive particles. (Optional Accessories)
- TS-301 Float Switch for automatic operation.

Technical Specifications:

- | | |
|---------------------------|--|
| • Motor Output (HP): 2/3 | • Cable Length (ft.): 32 |
| • Phase: Single | • Dimension (Dia x H, in.): 7-11/16 x 11-1/4 |
| • Discharge Bore (in.): 2 | • Continuous Running Water Level (in.): 2 |
| • Voltage/Amp: 110/6.1 | • Pump Weight (lbs.): 28 |

LB480



Float switch available upon request for most pumps.

Tsurumi Engine Driven Pumps

CENTRIFUGAL PUMPS, TRASH PUMPS & TRAILER MOUNTED

TSURUMI Engine Powered Pumps are constructed for maximum durability in a compact, easy handling design. Utilizing superior features and materials, Tsurumi provides an affordable, high value pump line designed to withstand your tough dewatering applications.

High chrome impeller, cast iron volute casing with stainless steel wear plate provides **increased durability and decreased maintenance** (Trash pumps only).


Durable Rolled-Steel frame provides for a safe, stable platform, **protects pump/engine during operation and transport**, and allows for easy handling.

Silicon Carbide mechanical seal **provides longer life**. Silicon Carbide's high uniform hardness and high density makes it an extremely abrasion resistant material.

Heavy-duty Honda gas engine **delivers high power** from a compact, reliable design.

Oil Alert System **automatically shuts the engine down** if the oil level falls below the safe operating level.

Rubber Vibration Isolators **ensure safe and stable operation**, reduce vibration of structural parts and support the pump casing to reduce hose or pipe strain.

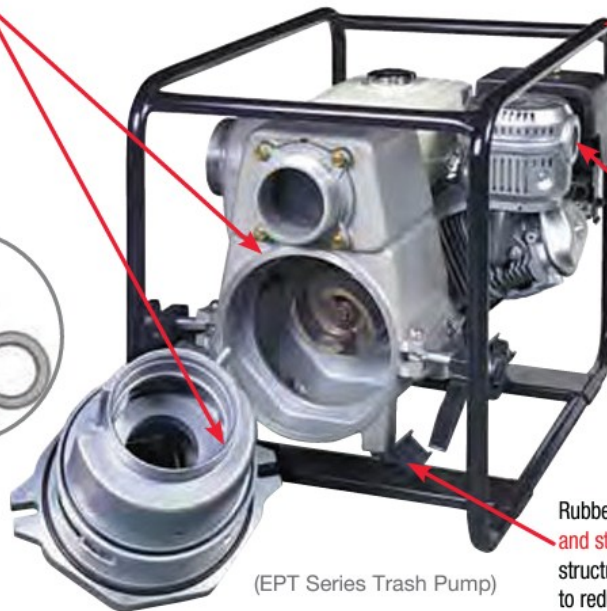

(EPT Series Trash Pump)

TE SERIES GAS ENGINE CENTRIFUGAL PUMPS



TE3-50HA
2" Centrifugal Pump
Powered by Honda



TE3-50V
2" Centrifugal Pump
Powered by Vanguard



TE3-80HA
3" Centrifugal Pump
Powered by Honda



TE3-80V
3" Centrifugal Pump
Powered by Vanguard



TE2-100HA
4" Centrifugal Pump
Powered by Honda



TE2-25H
1" Compact Centrifugal Pump
Powered by Honda

EPT SERIES GAS ENGINE TRASH PUMPS



EPT3-50HA
2" Trash Pump
Powered by Honda



EPT3-50V
2" Trash Pump
Powered by Vanguard



EPT3-80HA
3" Trash Pump
Powered by Honda



EPT3-100HA
4" Trash Pump
Powered by Honda



EPT3-100V
4" Trash Pump
Powered by Vanguard

THP HIGH PRESSURE PUMP






THP-4070HA
1" / 1.5" High Pressure Pump
Powered by Honda

Tsurumi TE Series Pumps

GAS ENGINE CENTRIFUGAL PUMPS POWERED BY HONDA

Tsurumi TE Series Centrifugal Pumps are powerful & lightweight pumps powered by heavy-duty **Honda and Vanguard engines**. Available in 1", 2", 3" and 4" NPT coupling suction sizes.

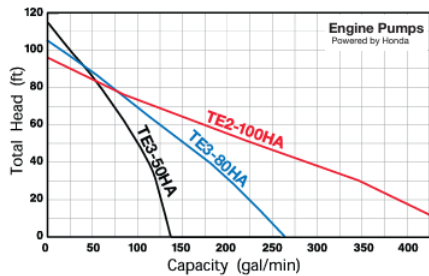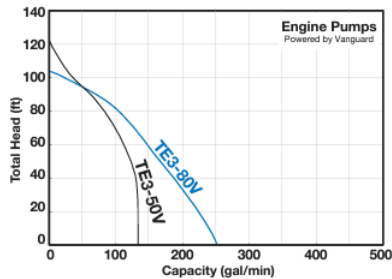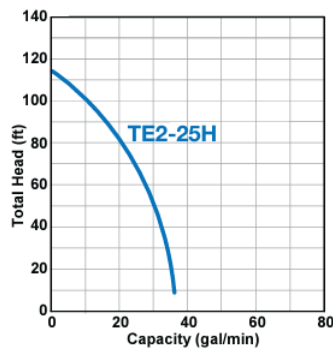

TE Series Features:

- Heavy-duty Honda gas engine with oil sensor and Silicon Carbide mechanical seal provides longer life
- Cast Iron impeller and volute casing
- Durable Rolled-Steel frame provides pump/engine with maximum protection, perfect ease of handling or transport, and safe operation
- Rubber mounts on the pump and the frame
- Suction strainer included (TE2-25H)
- 1", 2" and 3" models are light enough for parcel shipment

**Ask about additional accessories.*



MODEL	DISCHARGE/ SUCTION SIZE	ENGINE	MAX OUTPUT (hp / rpm)	LENGTH (in)	WIDTH (in)	HEIGHT (in)
TE2-25HA	1" NPSH Coupling	Honda GX-25	1.1 / 2220	9	14	13
TE3-50HA	2" NPT Coupling	Honda GX-120	4.0 / 3600	18-1/2	14-5/8	17-1/8
TE3-50V	2" NPT Coupling	Vanguard 160	5.0 / 3600	19-15/16	15-11/16	17-15/16
TE3-80HA	3" NPT Coupling	Honda GX-160	5.5 / 3600	20-1/2	16-1/2	18-1/8
TE3-80V	3" NPT Coupling	Vanguard 160	5.0 / 3600	19-15/16	15-11/16	17-15/16
TE2-100HA	4" NPT Coupling	Honda GX-240	8.0 / 3600	25	18	23-1/2

Tsurumi EPT Series Pumps

GAS ENGINE TRASH PUMP POWERED BY HONDA

Tsurumi EPT Series Centrifugal Pumps are powerful & lightweight pumps powered by heavy-duty Honda and Vanguard engines. Available in 1", 2", 3" and 4" NPT coupling suction sizes.



EPT3-50HA



EPT3-50V



EPT3-80HA



EPT3-100HA






EPT3-100V

EPT Series Features:

- Heavy-duty Honda gas engine with oil sensor delivers high power from a compact, reliable design. Silicon Carbide mechanical seal provides longer life
- High Chrome impeller, Cast Iron volute casing plus Stainless Steel wear plate promise increased durability and decreased maintenance
- Pump/engine set mounted to cage frame on Rubber Vibration Cushions to buffer stress and wear
- Durable Rolled-Steel frame provides pump/engine with maximum protection, perfect ease of handling or transport and safe operation
- Wheel Kit for easy transportation available with all trash pumps as an optional accessory

**Ask about additional accessories.*

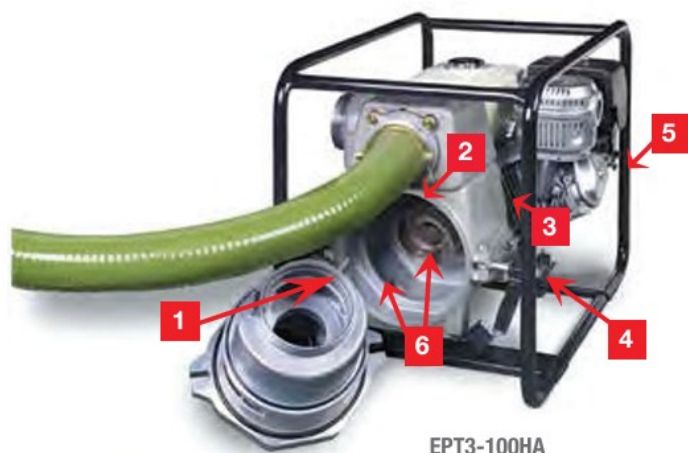

EPT3-100HA

Tsurumi EPT Series Engine Trash Pump


- 1 The clean-out door can be disassembled easily without taking off suction hose.
- 2 Designed with larger pump casing.
- 3 Heavy-duty Honda gas engine.
- 4 Mounted to cage frame on Rubber Vibration Cushions.
- 5 Durable rolled-steel frame.
- 6 High Chrome impeller, cast iron volute casing, stainless steel wear plate

MODEL	DISCHARGE/ SUCTION SIZE	ENGINE	MAX OUTPUT (hp / rpm)	LENGTH (in)	WIDTH (in)	HEIGHT (in)
EPT3-50HA	2" NPT Coupling	Honda GX-160	5.5 / 3600	23-1/4	18-1/4	17-3/8
EPT3-50V	2" NPT Coupling	Vanguard 160	5.0 / 3600	23-5/8	17-1/8	17-5/8
EPT3-80HA	3" NPT Coupling	Honda GX-240	8.0 / 3600	27-1/2	20-1/8	25-5/8
EPT3-100HA	4" NPT Coupling	Honda GX-340	14.0 / 3600	30-1/8	20-1/8	26
EPT3-100V	4" NPT Coupling	Vanguard 400	11.0 / 3600	28-15/16	20-1/4	22-3/8

Tsurumi THP Series Pumps

GAS ENGINE HIGH PRESSURE PUMP

High pressure and high performance: A pump for sprinkling, irrigation and fire protection.

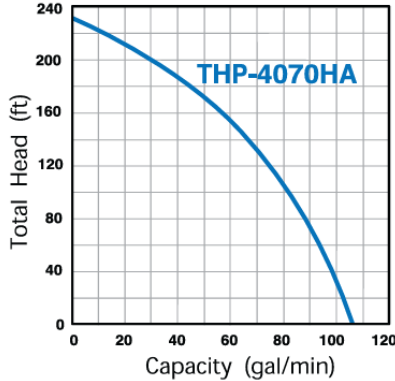

THP Series Features:

- Heavy-duty Honda gas engine with oil sensor and Silicon Carbide mechanical seal provides longer life
- Maximum pressure of 100 PSI for high pressure applications
- Versatile 3-way discharge allows pump to run up to three discharge lines simultaneously
- Two 1" couplings and one 1-1/2" coupling
- High head, closed impeller and cast iron volute casing deliver high performance and long wear life

**Ask about additional accessories.*

MODEL	DISCHARGE SIZE	SUCTION SIZE	ENGINE	MAX OUTPUT (hp / rpm)	LENGTH (in)	WIDTH (in)	HEIGHT (in)
THP-4070HA	1" x 2, 1.5" x 1 NPSH Coupling	1.5" NPSH Coupling	Honda GX-160	5.5 / 3600	21	16	18

Tsurumi TD6 Diaphragm Pumps

GAS & ELECTRIC


Capable of continuous dry operation for seepage dewatering. Handles sand, mud and sludge. Both HONDA GX120 engine driven (TD6 Series) and electric motor (TDE6 Series) diaphragm pumps are available.



TD6 / TDE6 Diaphragm Pump Features:

Powered by Honda

- Sand cast aluminum construction for portability and durability
- Thermoplastic rubber diaphragm
- 2" or 3" NPT suction and discharge size
- 1-5/8" diameter solids handling capability
- Modular component design permits easy maintenance and cleanout
- Gas engine model: Honda GX120 (TD6) / Electric motor model (TDE6)
- Delivers up to 88 GPM (TD6-300) / 59 GPM (TDE6-300)
- 90° Rotatable base on all models
- Maximum temperature 180°F

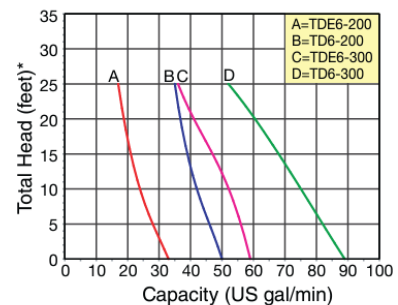

(*) Convert to psi, divide by 2.31 Liquid - Water specific gravity 1.0

MODEL	DISCHARGE/ SUCTION SIZE	ENGINE	MAX OUTPUT (hp / rpm)	LENGTH (in)	WIDTH (in)	HEIGHT (in)
TD6-200	2" NPT Coupling	Honda GX-120	4 / 3600	43	20	23
TD6-300	3" NPT Coupling	Honda GX-120	4 / 3600	43	26	23
TDE6-200	2" NPT Coupling	N/A	4 / 1725	44	20	23
TDE6-300	3" NPT Coupling	N/A	4 / 1725	44	26	23

Dewatering Bags, Inflatable Pipe Plugs & Accessories

Dewatering Bags

Use to remove both oils and sediment from a body of water. Attach to the end of a hose and pump water through it. The highly durable geotextile will eliminate hydrocarbons and sediment, while allowing the clean water to filter through.

SIZE	CAPACITY	PART #
3' x 4'	6 cubic feet	OILM7396
6' x 6'	18 cubic feet	OILM7397
10' x 15'	150 cubic feet	OILM7398
15' x 15'	225 cubic feet	OILM7399



Inflatable Pipe Plugs

Multi-size pipe plugs reinforced with Kevlar® have a wide application range. Plugs are made from a high-quality Neoprene rubber that will stand up to hydrocarbons. Each plug covers several pipe sizes. Multi-size ranges overlap for more user selectivity. For pipes from 8" diameter to 24" diameter. These sizes work on most municipal storm drains and sewers. Plugs are flexible and bend easily around tight corners or when installing through manholes.

Plug accessories are sold separately.

SIZE	PART #
8" - 16"	CON2010
12" - 21"	CON2011
14" - 24"	CON2012



Sleeves available upon request.

Inflation Lift Hose Kit

For use with Inflatable Pipe Plugs.

SIZE	PART #
16"	CON2014
32"	CON2015



ACCESSORIES

150# Flange Adapters & Valves



**SWING CHECK
VALVE**



90° ELBOW



TEE



**CONCENTRIC
REDUCER**



BLIND FLANGE



**THREADED
COMPANION**



**REDUCING
COMPANION**

Mechanical Contractor Products

Expansion Joints



RUBBER



METAL



Heat Pump Hoses



Applications:

Chillers, Fan Coils, Heat Pumps, Geothermal, Radiant Flooring, Water Bubblers, Water Coolers, Water Fountains, Water Heaters, just to name a few.

Miscellaneous sizes available upon request.

PRESSURE GAUGES

Dry and Liquid Filled Pressure Gauges



- Liquid Filled Gauges with a stainless case are used for protection in harsh environments
- Stainless Steel Case
- Copper Alloy Wetted parts
- Polycarbonate window +/- 1.5% of span accuracy
- Temperature Range -104°F to +158°F

2-1/2" FACE LIQUID FILLED GAUGES		LOWER MOUNT PART #	CENTER BACK MOUNT PART #
0-15	1/4" MALE NPT THREAD	201L-254B	202L-254B
0-30	1/4" MALE NPT THREAD	201L-254C	202L-254C
0-60	1/4" MALE NPT THREAD	201L-254D	202L-254D
0-100	1/4" MALE NPT THREAD	201L-254E	202L-254E
0-160	1/4" MALE NPT THREAD	201L-254F	202L-254F
0-200	1/4" MALE NPT THREAD	201L-254G	202L-254G
0-300	1/4" MALE NPT THREAD	201L-254H	202L-254H
0-600	1/4" MALE NPT THREAD	201L-254K	202L-254K
0-1000	1/4" MALE NPT THREAD	201L-254M	202L-254M
0-1500	1/4" MALE NPT THREAD	201L-254N	202L-254N
0-2000	1/4" MALE NPT THREAD	201L-254O	202L-254O
0-3000	1/4" MALE NPT THREAD	201L-254P	202L-254P
0-5000	1/4" MALE NPT THREAD	201L-254R	202L-254R
0-10000	1/4" MALE NPT THREAD	201L-254U	202L-254U
30-0 Vacuum	1/4" MALE NPT THREAD	201L-254A	202L-254A


Call for additional configurations.

REELS

Reelcraft Hose Reels, Cable Reels and Cord Reels

Reelcraft Reels outlast and outperform all the others. Reelcraft Reels are the industry standard for reliable and durable hose reels and cable reels. No one makes a better hose reel or cable reel. Reelcraft is the global manufacturing leader of hose reels, cord reels, and cable reels for industrial, commercial and professional applications.

Amazon Hose is your complete source for Reelcraft hose reels and cord reels. Our knowledgeable sales staff is here to help you find the right Reelcraft hose reel to fit the job and at the right price to fit your budget. Contact us today to place your hose reel order!

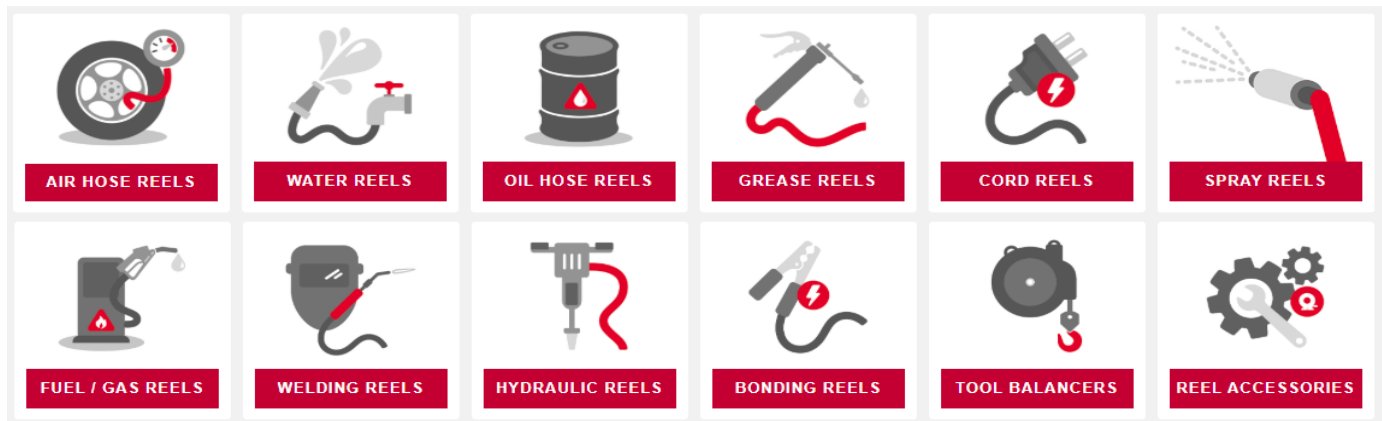

RT650-OLP



4625 OLP



5650 OLP



L 4545 123 3



7650 OLP



82100 OLP



E9350 OMPBW



L 4050 163 10

VALVES

Full Port Brass Ball Valves



SIZE	PART #
1/4"	VFPBD
3/8"	VFPBF
1/2"	VFPBH
3/4"	VFPBL
1"	VFPB1
1-1/4"	VFPB1D
1-1/2"	VFPB1H
2"	VFPB2
3"	VFPB3
4"	VFPB4

- **SOLID CHROME PLATED BRASS BALL**
- Suitable for full range of liquids and gases
- Minimal pressure drop due to large full size ports
- Bottom loaded, pressure retaining stem
- Pressure rated at 600psi (42 bars) WOG (non-shock) and 150 WSP (10.34 bars) saturated steam. Virgin TFE stem packing seal, thrust washer and seats
- Fast 1/4 turn open or close operation
- Low operating torque
- Flow can go both directions
- **Adjustable stem packing gland**
- Maximum operating temperature: 248°F (120°C) at 600psi
- Minimum operating temperature: -20°F (-40°C)
- Each valve individually tested
- Forged Brass—for more strength
- Threaded ends to ANSI B1.20.1
- Hard chromium plated solid ball
- Bottom entry, blow-out proof stem
- **Also available in Steel and Stainless Steel**

200 psi / WOG Brass Gate and Swing Check Valves



GATE VALVE



SWING CHECK VALVE


SIZE	GATE VALVE PART #	SWING CHECK VALVE PART #
1/4"	GVBRD	N/A
3/8"	GVBRF	N/A
1/2"	GVBRH	SWCKVH
3/4"	GVBRL	SWCKVL
1"	GVBR1	SWCKV1
1-1/4"	GVBR1D	SWCKV1D
1-1/2"	GVBR1H	SWCKV1H
2"	GVBR2	SWCKV2
3"	GVBR3	SWCKV3
4"	GVBR4	SWCKV4

Call for additional sizes.

BELTS

V-Belts


As the manufacturer of the full line of power transmission belts, Continental offers a variety of friction-fit drive elements for wraparound drives in which slip is permissible. Wrapped V-belts for harsh ambient conditions, raw-edge V-belts for maximum power transmission and serpentine drives or variable-speed belts for variable transmission ratios – Continental V-belts are extremely smooth power transmission elements for an extensive range of applications.

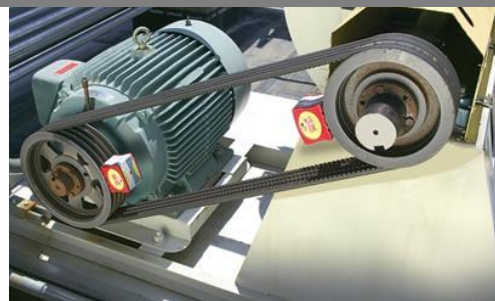

CONTI® FHP
2L, 3L, 4L, 5L Series



CONTI® HEX
AA, BB, CC, CCP Series

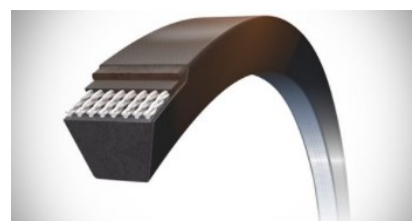


CONTI® HY-T-PLUS
A, B, C, D, E Series



CONTI® TORQUE-FLEX
AX, BX, CX Series



CONTI® HY-T-WEDGE
3VX, 3V, 5VX, 5V, 8VX, 8V Series

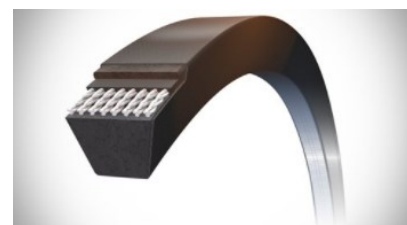

CONTI® INSTA-POWER
Aramid (Kevlar)
83, 84, 85, 87 Series



CONTI® HY-T WEDGE TORQUE-TEAM
Banded
3VX, 3V, 5VX, 5V, 8V Series



CONTI® TORQUE-TEAM-PLUS
Aramid (Kevlar) / Banded
5VF, 8VF Series



CONTI® HY-T TORQUE-TEAM CLASSICAL
Banded
BX, B, CX, C, D Series

BELTS

Synchronous Belts

Maximum precision plus maintenance-free operation and efficiencies up to 99% – as the manufacturer of the full line of power transmission belts, Continental offers a comprehensive range of timing belts made of rubber and polyurethane. To ensure that it can cover all industrial requirements, the portfolio contains an extensive variety of synchronous drive elements ranging from belts for household applications to heavy-duty timing belts to replace chains or for the most extreme ambient conditions.



CONTI® FALCON PD

Temp Rating up to 210°F Continuous
Up to 300°F Intermittent
8M, 14M Series



CONTI® SILENTSYNC

Temp Rating up to 200° Continuous
8M, 14M Series



CONTI® SYNCHROCHAIN CARBON

Temp Rating up to 176°F
Polyurethane / Carbon Cord
8M, 14M Series



CONTI® HAWK PD

Universal Profile
3M, 5M, 8M, 14M, 20M Series



CONTI® DUAL HI PERFORMANCE PD

Double-Sided
8M, 14M Series



CONTI® POSITIVE DRIVE PD

MXL, XL, L, H, XH, XXH Series



CONTI® DUAL-POSITIVE-DRIVE

Double-Sided
XL, L, H Series

AIR HOSE & COUPLINGS

Continental Air Hose Assemblies and King Couplings

CONTRACTOR AIR HOSE—STANDARD	PART #
3/4" x 50 FT. RED 300 PSI STANDARD GRADE. CONTINENTAL JACKHAMMER AIR HOSE. CRIMPED WITH AIR KING COUPLINGS. MADE IN USA.	3/4X50FT. CONTRACTOR AIR



AIR KING UNIVERSAL		PART #
1/2"	HOSE BARB	AM1
3/4"	HOSE BARB	AM6
1"	HOSE BARB	AM11
1-1/4"	4 LUG HOSE BARB	AM16
1-1/2"	4 LUG HOSE BARB	AM21
1/2"	MALE NPT	AM2
3/4"	MALE NPT	AM7
1"	MALE NPT	AM12
1/2"	FEMALE NPT	AM3
3/4"	FEMALE NPT	AM8
1"	FEMALE NPT	AM13
N/A	TRIPLE UNION CONNECTOR	AM10
25 Pack	SAFETY CLIPS	AC1
50 Pack	HOSE GASKETS	AWR4



HOSE BARB



MALE NPT




FEMALE NPT




TRIPLE UNION CONNECTOR



4 LUG HOSE BARB



SAFETY CLIP



HOSE GASKET

SHOP AIR HOSE	PART #
3/8" x 50 FT. BLUE 300 PSI CONTINENTAL FRONTIER AIR HOSE WITH 1/4" MALE NPT ENDS. MADE IN USA.	A.3850MP BLUE
3/8" x 50 FT. BLUE 300 PSI CONTINENTAL AIR HOSE WITH 1/4" MALE NPT ENDS AND QUICK DISCONNECTS. MADE IN USA.	A.3850MP BLUE.QD
SHOP AIR HOSE QUICK DISCONNECTS	PART #
1/4" FEMALE QUICK DISCONNECT SOCKET x FEMALE PIPE	3003
1/4" MALE QUICK DISCONNECT SOCKET x FEMALE PIPE	11-3
1/4" MALE QUICK DISCONNECT SOCKET x MALE PIPE	10-3



WITHOUT QUICK DISCONNECTS



WITH QUICK DISCONNECTS



3003



11-3



10-3

Wire-Braid Air Hose, Hose Ends and Accessories

WIRE-BRAID REINFORCED AIR HOSE	PART #
2" 600 PSI WIRE REINFORCED AIR HOSE. *Available in bulk 50 Ft. rolls or as assemblies.	HAWB2
3" 600 PSI WIRE REINFORCED AIR HOSE. *Available in bulk 50 Ft. rolls or as assemblies.	HAWB3

4" assemblies are available upon request.



GROUND JOINT FITTINGS AND CLAMPS		PART #
2"	GROUND JOINT SET WITH FEMALE SPUD	GF81
3"	GROUND JOINT SET WITH FEMALE SPUD	GF111
2"	MALE STEM	MS26
3"	MALE STEM	MS36
2"	FEMALE SPUD	GB28
3"	FEMALE SPUD	GB38
2"	DOUBLE SPUD	GDB28
3"	DOUBLE SPUD	GDB38
2"	BOSS 4-BOLT CLAMP	BU29
2"	BOSS 4-BOLT CLAMP	B29
2"	BOSS 4-BOLT CLAMP	B30
3"	BOSS 4-BOLT CLAMP	BU35
3"	BOSS 4-BOLT CLAMP	B35
2"	CAMPBELL VITON SEAL GROUND JOINT	GJF-8
3"	CAMPBELL VITON SEAL GROUND JOINT	GJF-12



GROUND JOINT SET WITH FEMALE SPUD



MALE STEM



FEMALE SPUD



DOUBLE SPUD



BOSS 4-BOLT CLAMP



VITON GROUND JOINT



U-BOLT CLAMPS AVAILABLE

TECHNICAL NOTE:

- Always tighten bolts to their specified torque value.
- Periodic re-tightening of bolts is required due to "cold flow" phenomenon present in all rubber hoses.
- Contact Amazon Hose for specified torque values and manufacturer's recommended re-tightening schedule.

WHIP CHECK SAFETY CABLES			
CABLE SIZE	HOSE ID RANGE	TYPE	PART #
1/8" x 20-1/4"	1/2" through 1-1/4"	HOSE TO HOSE	WB1
3/16" x 28"	1/2" through 2"	HOSE TO HOSE	WB3
1/4" x 38"	1-1/2" through 3"	HOSE TO HOSE	WA2
1/8" x 20-1/4"	1/2" through 1-1/4"	HOSE TO TOOL	WSR1
3/16" x 28"	1/2" through 2"	HOSE TO TOOL	WSR3
1/4" x 38"	1-1/2" through 3"	HOSE TO TOOL	WSR2



HOSE TO HOSE



HOSE TO TOOL

Mobile Ventilation, A/C and Heating Duct Hose

Dehumidification



Construction: High strength sewn single-ply PVC vinyl coated polyester fabric hose reinforced with a spring steel wire helix and external PVC wearstrip

Temperature Range: -20°F to 180°F

Standard Color: Yellow with Black Wearstrip

Size Range: 12" to 24"

Standard Length: 25 Feet

- Sewn construction allows for better performance in low and higher temperatures
- Light weight duct designed for dehumidification applications
- Great Compressibility 6:1
- Wearstrip offers additional external abrasion and drag resistance

- Moisture resistant and UV stabilized to prevent mold and mildew
- Flame retardant to UL 94V-0
- Also available in white with white wearstrip
- Available with wire rope/nylon ring and enclosed belted cuff

Industrial Rental



Construction: High strength sewn single-ply urethane coated polyester fabric hose reinforced with a spring steel wire helix and external PVC wearstrip

Temperature Range: -60°F to 400°F

Standard Color: Black with Orange Wearstrip

Size Range: 12" to 24"

Standard Length: 25 Feet

- Sewn construction allows for better performance in low and higher temperatures
- Light weight duct designed for portable and/or temporary heating
- Great Compressibility 6:1
- Safety orange wearstrip offers additional external abrasion and drag resistance
- Moisture resistant and UV stabilized to prevent mold and mildew

- Urethane coating increases puncture, abrasion and tear resistance
- Great chemical, fuel and oil resistance
- Flame retardant to ASTM D6413
- Ideal for commercial and residential work area heating, cement drying and event tents
- Available with wire rope/nylon ring and enclosed belted cuff

Construction/Oil & Gas



Construction: High strength sewn single-ply heavy duty silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external wearstrip

Temperature Range: -50°F to 550°F

Standard Color: Silver with Black Wearstrip

Size Range: 12" to 24"

Standard Length: 25 Feet

- Sewn construction allows for better performance in low and higher temperatures
- Light weight duct designed for higher temperature portable and/or temporary heating and dehumidification applications
- Great Compressibility 6:1
- Flexible heater ducting able to withstand higher temperatures and maintain flexibility in cold weather conditions

- Wearstrip offers additional external abrasion and drag resistance
- Great puncture and tear resistance
- Flame retardant to UL 94V-0
- Available with wire rope/nylon ring and enclosed belted cuff
- Ideal heater duct for cold weather construction and oil & gas sites

Portable High Heat



Construction: High strength sewn single-ply urethane polyester fabric hose reinforced with a spring steel wire helix and external wearstrip (FX-400) combined with high strength sewn single-ply heavy duty silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external wearstrip (FX-550)

Temperature Range: -60°F to 550°F

Standard Color: Black with Black Wearstrip and Silver with Black Wearstrip

Size Range: 12" to 24"

Standard Length: Customized lengths of FX-400 and FX-550 combined (25' total length)

- Sewn construction allows for better performance in low and higher temperatures
- Combination ducting (FX-400 and FX-550) is an economical way to manage high heat
- Excellent for open/direct heating units
- Combo ducting allows for direct preheated air to be delivered to various shelters & workplaces

**SEWN CUFFS, BELTED CUFFS, RING CONNECTORS
OR ENCLOSED CLAMP CUFFS AVAILABLE.**



Bridge Clamps



J-Locks



Connectors



Pin-Locks




Latch-Locks

Concrete Pump Hose Assemblies

Continental Allcrete Textile Concrete Pump Hose Assemblies - Premium Grade 1233 psi

MALE NPT PIPE ENDS			PART #
1-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	CP 1-1/2X50IPT
2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	CP 2X50 IPT
2-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	CP 2-1/2X50 IPT
3"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	CP 3X50 IPT
VICTAULIC GROOVED ENDS			PART #
1-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	CP 1-1/2X50 VIC
2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	CP 2X50 VIC
2-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	CP 2-1/2X50 VIC
3"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	CP 3X50VIC
HEAVY DUTY FLANGED ENDS			PART #
1-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW HEAVY DUTY ENDS	CP 1-1/2X50HD
2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW HEAVY DUTY ENDS	CP 2X50 HD
2-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW HEAVY DUTY ENDS	CP 2-1/2X50 HD
3"	x 50 FT.	INTERNAL EXPANSION FULL FLOW HEAVY DUTY ENDS	CP 3X50 HD
2"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CP 2X50AHD
3"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CP 3X50AHD
4"	x 10 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CP 4X10AHD
4"	x 25 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CP 4X25AHD
4"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CP 4X50AHD



Polyhose Textile Concrete Pump Hose Assemblies - Standard Grade 1233 psi

MALE NPT PIPE ENDS			PART #
2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	PGC 2X50 IPT
2-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	PGC 2-1/2X50 IPT
3"	x 50 FT.	INTERNAL EXPANSION FULL FLOW MALE NPT ENDS	PGC 3X50 IPT
VICTUALIC GROOVED ENDS			PART #
2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	PGC 2X50 VIC
2-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	PGC 2-1/2X50 VIC
3"	x 50 FT.	INTERNAL EXPANSION FULL FLOW VICTAULIC ENDS	PGC 3X50 VIC
HEAVY DUTY FLANGED ENDS			PART #
2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW HEAVY DUTY ENDS	PGC 2X50 HD
2-1/2"	x 50 FT.	INTERNAL EXPANSION FULL FLOW HEAVY DUTY ENDS	PGC 2-1/2X50 HD
2"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	PGC 2X50AHD
3"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	PGC 3X50AHD



Wire-Reinforced Concrete Pump Hose Assemblies - 1230 psi

CRIMPED HEAT TREATED HEAVY DUTY FLANGED ENDS			PART #
2"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CPW 2X50AHD
3"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CPW 3X50AHD
4"	x 10 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CPW 4X10AHD
4"	x 25 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CPW 4X25AHD
4"	x 50 FT.	CRIMPED HEAT TREATED HEAVY DUTY ENDS	CPW 4X50AHD



Larger sizes available upon request.

CONCRETE PUMP HEAVY DUTY CLAMPS	PART #
2" HINGED STYLE CLAMP	IXHC200
3" HINGED STYLE CLAMP	IXHC300
4" HINGED STYLE CLAMP	IXHC400



HEAVY DUTY CLAMP GASKETS	PART #
2" REPLACEMENT GASKET	IXHCG200
3" REPLACEMENT GASKET	IXHCG300
4" REPLACEMENT GASKET	IXHCG400



Missile Boring Hoses



MISSILE BORING WHIP HOSES



MISSILE BORING HOSE

Ask us about available sizes and lengths.

Missile Couplings and Accessories

DIX-LOCK N-SERIES BOWES INTERCHANGE PLUG STANDARD HOSE BARB		STEEL PART #
BODY SIZE	HOSE ID	
1/2"	1/2"	N4S4
	3/4"	N4S6



DIX-LOCK N-SERIES BOWES INTERCHANGE COUPLER STANDARD HOSE BARB		STEEL PART #
BODY SIZE	HOSE ID	
1/2"	1/2"	4NS4
	3/4"	4NS6



DIX-LOCK N-SERIES BOWES COUPLER MALE THREAD		STEEL PART #
BODY SIZE	THREADS	
1/2"	1/2" - 14 NPTF	4NM4
	3/4" - 14 NPTF	4NM6



DIX-LOCK N-SERIES BOWES PLUG FEMALE THREAD		STEEL PART #
BODY SIZE	THREADS	
1/2"	1/2" - 14 NPTF	N4F4
	3/4" - 14 NPTF	N4F6



DIX-LOCK N-SERIES BOWES COUPLER FEMALE THREAD		STEEL PART #
BODY SIZE	THREADS	
1/2"	1/2" - 14 NPTF	4NF4
	3/4" - 14 NPTF	4NF6



DIX-LOCK N-SERIES BOWES INTERCHANGE SAFETY-LOCK HOSE BARB PLUG		STEEL PART #
BODY SIZE	HOSE ID	
1/2"	1/2"	N4S4-LS
	3/4"	N4S6-LS



Continental Hydraulic Hose

XR16SC HIGH ABRASION 2-WIRE BRAID HYDRAULIC HOSE Meets or Exceeds SAE100R16		WORKING PRESSURE RATINGS	PART #
1/4"	EXTENDED LIFE COVER	5800 PSI	XR16SC-04
3/8"	EXTENDED LIFE COVER	5000 PSI	XR16SC-06
1/2"	EXTENDED LIFE COVER	5000 PSI	XR16SC-08
3/4"	EXTENDED LIFE COVER	3500 PSI	XR16SC-12
1"	EXTENDED LIFE COVER	3000 PSI	XR16SC-16
1-1/4"	EXTENDED LIFE COVER	2250 PSI	XR16SC-20



XCP4S HIGH ABRASION, HIGH PRESSURE 4-WIRE SPIRAL HYDRAULIC HOSE Meets or Exceeds SAE100R12		WORKING PRESSURE RATINGS	PART #
3/4"	EXTENDED LIFE COVER	4100 PSI	XCP4S-12
1"	EXTENDED LIFE COVER	4100 PSI	XCP4S-16
1-1/4"	EXTENDED LIFE COVER	4100 PSI	XCP4S-20
1-1/2"	EXTENDED LIFE COVER	4100 PSI	XCP4S-24
2"	EXTENDED LIFE COVER	4100 PSI	XCP4S-32



XCP5S HIGH ABRASION, VERY HIGH PRESSURE 4 & 6-WIRE SPIRAL HYDRAULIC HOSE		WORKING PRESSURE RATINGS	PART #
3/4"	EXTENDED LIFE COVER	5100 PSI	XCP5S-12
1"	EXTENDED LIFE COVER	5100 PSI	XCP5S-16
1-1/4"	EXTENDED LIFE COVER	5100 PSI	XCP5S-20
1-1/2"	EXTENDED LIFE COVER	5100 PSI	XCP5S-24
2"	EXTENDED LIFE COVER	5100 PSI	XCP5S-32



XCP6S HIGH ABRASION, EXTREME HIGH PRESSURE 4 & 6-WIRE SPIRAL HYDRAULIC HOSE		WORKING PRESSURE RATINGS	PART #
1/2"	EXTENDED LIFE COVER	6100 PSI	XCP6S-08
5/8"	EXTENDED LIFE COVER	6100 PSI	XCP6S-10
3/4"	EXTENDED LIFE COVER	6100 PSI	XCP6S-12
1"	EXTENDED LIFE COVER	6100 PSI	XCP6S-16
1-1/4"	EXTENDED LIFE COVER	6100 PSI	XCP6S-20
1-1/2"	EXTENDED LIFE COVER	6100 PSI	XCP6S-24



DR5 HIGH TEMPERATURE MULTI PURPOSE HYDRAULIC HOSE Meets or Exceeds SAE100R5		WORKING PRESSURE RATINGS	PART #
3/16"	HIGH TEMP	3000 PSI	DR5-04
1/4"	HIGH TEMP	3000 PSI	DR5-05
5/16"	HIGH TEMP	2250 PSI	DR5-06
13/32"	HIGH TEMP	2000 PSI	DR5-08
1/2"	HIGH TEMP	1750 PSI	DR5-10
5/8"	HIGH TEMP	1500 PSI	DR5-12
7/8"	HIGH TEMP	800 PSI	DR5-16



HR4 HIGH TEMPERATURE, LOW PRESSURE* SUCTION HYDRAULIC HOSE Meets or Exceeds SAE100R4		WORKING PRESSURE RATINGS	PART #
3/4"	HIGH TEMP RETURN LINE	300 PSI	HR4-12
1"	HIGH TEMP RETURN LINE	250 PSI	HR4-16
1-1/4"	HIGH TEMP RETURN LINE	200 PSI	HR4-20
1-1/2"	HIGH TEMP RETURN LINE	150 PSI	HR4-24
2"	HIGH TEMP RETURN LINE	100 PSI	HR4-32
2-1/2"	HIGH TEMP RETURN LINE	58 PSI	HR4-40

** This hose has half the bend radius of typical SAE100R4.*






SHJ Hydraulic Jacking Hose 2-Wire Braid, 10,000 PSI Static Application 2 to 1 Safety Factor		WORKING PRESSURE RATINGS	PART #
1/4"	HYDRAULIC JACKING HOSE	10,000 PSI	SHJ-04
3/8"	HYDRAULIC JACKING HOSE	10,000 PSI	SHJ-06




See our line of Enerpac mobile hydraulic equipment of page 48.

Continental Hydraulic Hose Ends



Continental's Shop in a Box

The PC125 and PC160i crimper Shop in a Box from Continental is your new profit center. You get everything you need to create premium Continental hose assemblies as soon as you unpack it. Call us today for pricing and details!

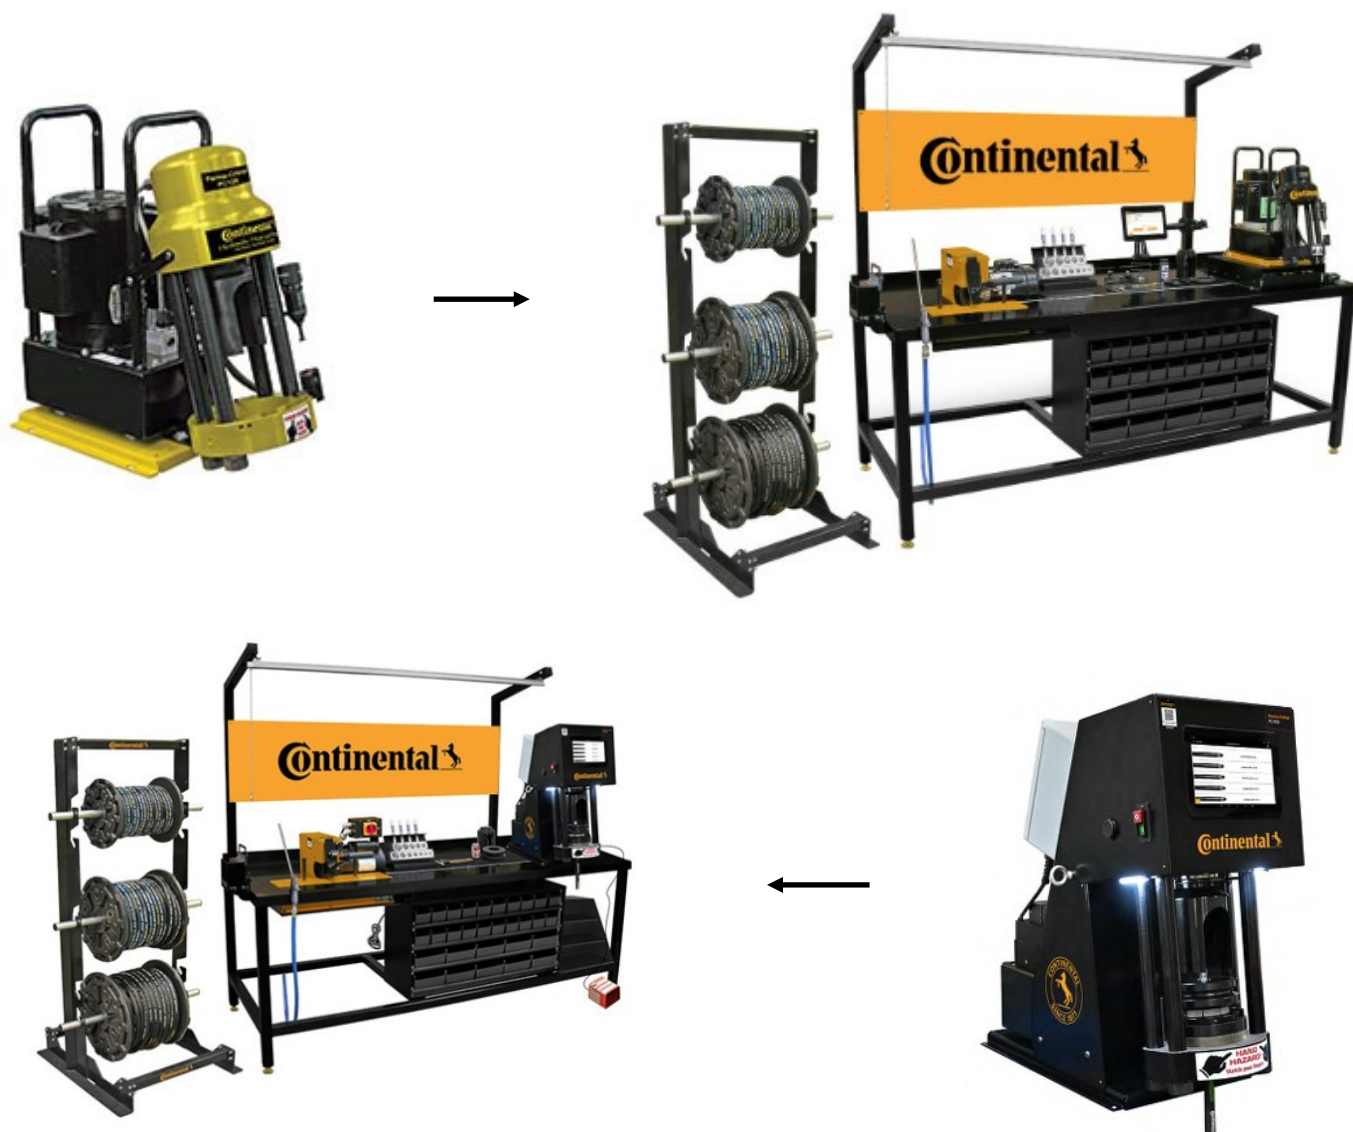

What's Included?

- PC160i-RCD-SKIT OR PC125-RCD-SKIT (1)
(includes dies, shelf and calipers)
- HS501 Hose Saw OR HS150 Hose Saw (1)
- Hose Helper
- SG Insertion Block (1)
- B2 Insertion Block (1)
- Paint Markers (4)
- Fitting Bin (2)
- Fittings Bin Boxes (2)
- Work Table (96" x 36")
- Tape Measure (2)
- Hose Reel Rack (1)
- LED Work Light
- Continental Air Hose & Nozzle
- Power Strip
- CrimpIQ™ Tablet

Hydraulic Quick Disconnect Couplings



**THREADED BRASS
WING-NUT COUPLINGS**



**THREADED STEEL HIGH
PRESSURE COUPLINGS**



**VEP THREADED HIGH
PRESSURE, HIGH
IMPULSE COUPLINGS**



FLAT FACE COUPLINGS



**ISO B INTERCHANGE
COUPLINGS**

Enerpac® Hydraulic Equipment



See page 45 for our 10,000 PSI hydraulic jack hose.

Hydraulic Oil and Spill Containment Solutions




**OIL ABSORBENT PADS
SOLD IN PACKS OF 100
DP9W**



**UNIVERSAL ABSORBENT PADS
SOLD IN PACKS OF 100
DP9G**



**HYD OIL 32 WEIGHT
5 GALLON PAILS ONLY
AW32-5**



**HYD OIL 68 WEIGHT
5 GALLON PAILS ONLY
AW68-5**



**UNIVERSAL SPILL KIT
IN A BAG
OILM7000**



**UNIVERSAL SPILL KIT
55-GALLON
OILM7071**

PRESSURE WASHER HOSE

Pressure Washer Hose Assemblies and Accessories

PRESSURE WASHER HOSES	PART #
3/8" x 50 FT. 4000 PSI W/ 3/8" MALE NPT ENDS	PW-06X50FT.
3/8" x 100 FT. 4000 PSI W/ 3/8" MALE NPT ENDS	PW-06X100FT.
3/8" x 50 FT. 4000 PSI W/ 3/8" MALE NPT ENDS W/QUICK DISCONNECTS	PW-06X50FT.QD
3/8" x 100 FT. 4000 PSI W/ 3/8" MALE NPT ENDS W/QUICK DISCONNECTS	PW-06X100FT.QD
3/8" x 50 FT. 4000 PSI W/ 3/8" MALE NPT ENDS W/QUICK DISCONNECTS GREY NON-MARKING	3/8X50FT.PWGY W/QD'S
3/8" x 50 FT. 6000 PSI W/ 3/8" MALE NPT ENDS W/QUICK DISCONNECTS GREY NON-MARKING	WDW3/8X50FT.FACT.BUILT
3/8" x 50 FT. 6000 PSI W/ 3/8" MALE NPT ENDS W/QUICK DISCONNECTS BLUE NON-MARKING	PW60BLFX50/WQDS



WITHOUT QUICK DISCONNECTS
PW-06X50FT.



WITH QUICK DISCONNECTS
PW-06X50FT.QD



NON-MARKING WITH QUICK DISCONNECTS
3/8X50FT.PWGY W/QD'S



NON-MARKING WITH QUICK DISCONNECTS
PW60BLFX50/WQDS

PRESSURE WASHER ACCESSORIES	PART #
GUN ONLY	SG-920
3 FT. WAND	PW/WAND 36
4 FT. WAND	PW/WAND 48
WAND INSULATOR	JEA 5165
NYLON 1/8" x 1/4" CHEMICAL STRAINER	JEA 7165
3/8" NON-ADJUSTABLE CHEMICAL INJECTOR	JEA 7263
FILTER	JEA GPZMFIL
1/4" FEMALE QUICK DISCONNECT SOCKET	25FS
3/8" FEMALE QUICK DISCONNECT SOCKET	38FS
3/8" MALE QUICK DISCONNECT x MALE PIPE	38MP
3/8" MALE QUICK DISCONNECT x FEMALE PIPE	38FP
REPLACEMENT O-RING FOR 1/4" SOCKET	OR110B90
REPLACEMENT O-RING FOR 3/8" SOCKET	OR112B90
SOAP TIP	TI745-6540B
QUICK DISCONNECT SPRAY TIPS (0°, 15°, 25° AND 40° DEGREE SPRAY PATTERN)	0° TI745-0055
	15° TI745-1555
	25° TI745-2555
	40° TI745-4055



GUN AND WAND SOLD SEPARATELY



JEA 5165



JEA 7165



JEA 7263



JEA GPZMFIL



FEMALE QUICK DISCONNECT



MALE QUICK DISCONNECT



TI745-6540B



0°



15°



25°



40°

Filter Solutions

Representing the biggest names in filtration, Amazon Hose & Rubber Co. has the product offerings and expertise to recommend the **BEST solutions** to meet your operational needs. We are supported by our internal and supplier experts, offering the latest filtration technology across the major industries and applications.



Filtration Products

- Activated Carbon
- Bag
- Breathers
- Cartridge
 - Depth
 - High / Medium Pressure
 - Melt Blown
 - Pleated
 - Resin Bonded
 - Return / Suction
 - String Wound
- Coalescers
- Chip Conveyors
- Custom Systems
- Discs
- Dryers
- Dust Collector
- EDM
- Filter Carts
- FRL
- Gravity Bed
- High Flow
- HVAC
- Housings
 - Bag
 - Cartridge
- In-line
- Last Chance Inserts
- Magnetic
- Membrane
- Mesh Pads
- Mist Collectors
- Paint Booth Filters
- Panel / Barrier
- Particle Counters
- Reverse Osmosis
- Roll Media
- Self Cleaning
- Separators / Centrifuges
- Smoke Collectors
- Spin-on
- Strainers
- Tank Top / In-take
- Ramp Oil Separator
- UV Purification
- Vacuum
- Wire Mesh

Filtration Industries and Applications

- Aerospace
- Agriculture
- Automotive
- Compressed Gases
- Extrusion
- Food & Beverage
- General Industrial
- Hydraulics
- Marine
- Machining
- Mining
- Mobile
- Oil & Gas
- Paints & Coatings
- Petro / Chemical
- Plastic Molding
- Power Gen
- Pulp & Paper
- Railroad
- Remediation / Recycling
- Specialty Gases
- Steel Mills
- Water
 - Process
 - Produced
 - Waste
 - Cooling
 - Drinking



Sales Policy

Terms

Net 30 day terms are available for accounts approved by our credit department. We reserve the right to withhold shipment to accounts with unpaid balances exceeding 30 days, or, alternatively, to require C.O.D. payment for new purchases until such time as the account is no longer delinquent and credit is reapproved.

Freight

All shipments are F.O.B. Amazon Hose & Rubber Warehouses.

Prices

All prices are subjected to change without notice.

Taxes

Applicable sales taxes will be applied on all orders, unless we have customer's exemption certificate on file.

ALL CREDIT TO BE ISSUED AGAINST DEFECTIVE MATERIAL MUST BE AUTHORIZED BY THE MANUFACTURER.

Returned Goods

All merchandise is guaranteed against defects in material and workmanship. Merchandise believed to be defective requires a return authorization form and must be returned prepaid. Freight charges will be refunded if credit is allowed against warranty. Prior approval is required before any merchandise can be returned. Return of non-defective material, or material ordered incorrectly, will be subject to a 25% restocking charge. Cut and/or assembled hose ordered incorrectly **may not** be returned.

Cancellations

On stock material not yet in process, no cancellation charge will apply. On stock material that is in process, a cancellation charge of 25% will be applied. Orders for special or non-stock materials cannot be cancelled.

Technical Data

Various tables and charts may be found on our website www.AmazonHose.com. We offer these as guides and assume no responsibility for their accuracy, as manufacturers may change their specifications without notice.

Special Orders

We require a 50% deposit on all special or non-stock product orders. This payment must be received by Amazon Hose prior to placing the order with our manufacturers.


To apply for credit or open an account, go to www.amazonhose.com/resources/credit-app.



Proudly Serving the Construction, Contactor, and Rental Industries.

Local Service. National Scale.

200+ Branches Across North America

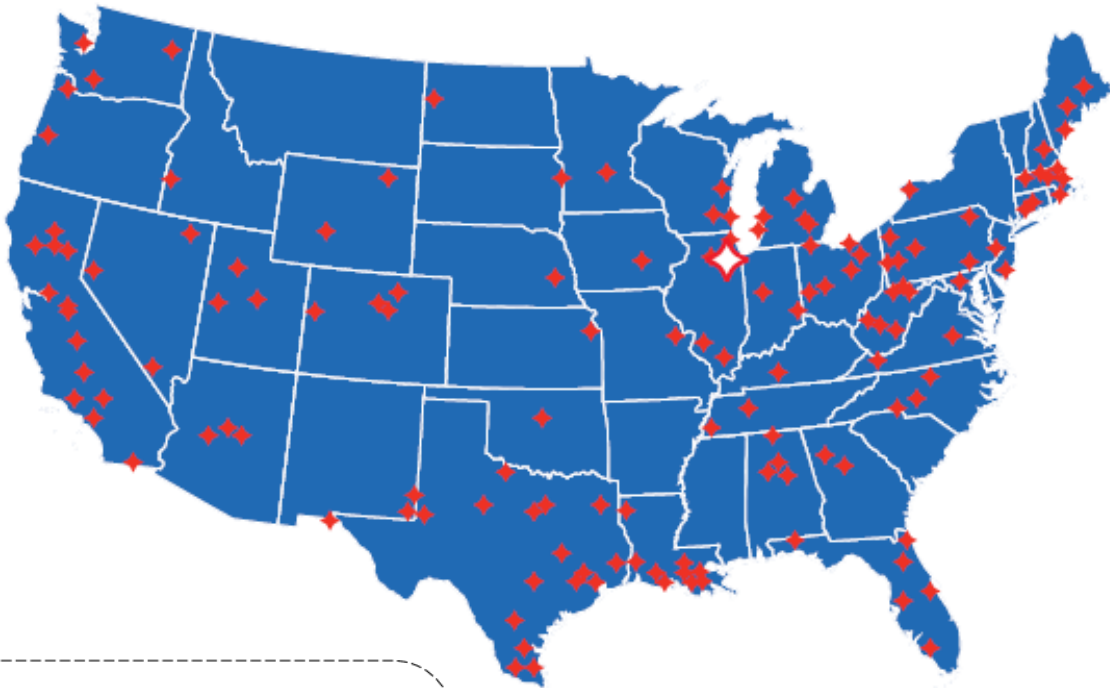

**One Call
Gets it All!**

amazon
HOSE & RUBBER COMPANY
a SunSource Company

ORLANDO

4105 Seaboard Rd.
Orlando, FL 32808
Tel: (407) 843-8190

SOUTH ORLANDO

9961 Sidney Hayes Rd.
Orlando, FL 32824
Tel: (407) 843-8190

TAMPA

1103 N. 50th St.
Tampa, FL 33619
Tel: (813) 223-7554

MIAMI

1001 N.W. 159th Dr.
Miami Gardens, FL 33169
Tel: (305) 620-4313

WEST PALM BEACH

5740 Dexter Way
West Palm Beach, FL 33407
(561) 844-3699

www.AmazonHose.com