amazon
HOSE & RUBBER COMPANY
a SunSource Company



Terminal Products

amazonhose.com
800.506.5514

Orlando • South Orlando • Tampa • Miami • Riviera Beach

Tank Truck: Bottom Loading/Unloading

Loading Arms




Swivels



Loading Arm Support Braces



Loading Arm Counterbalances

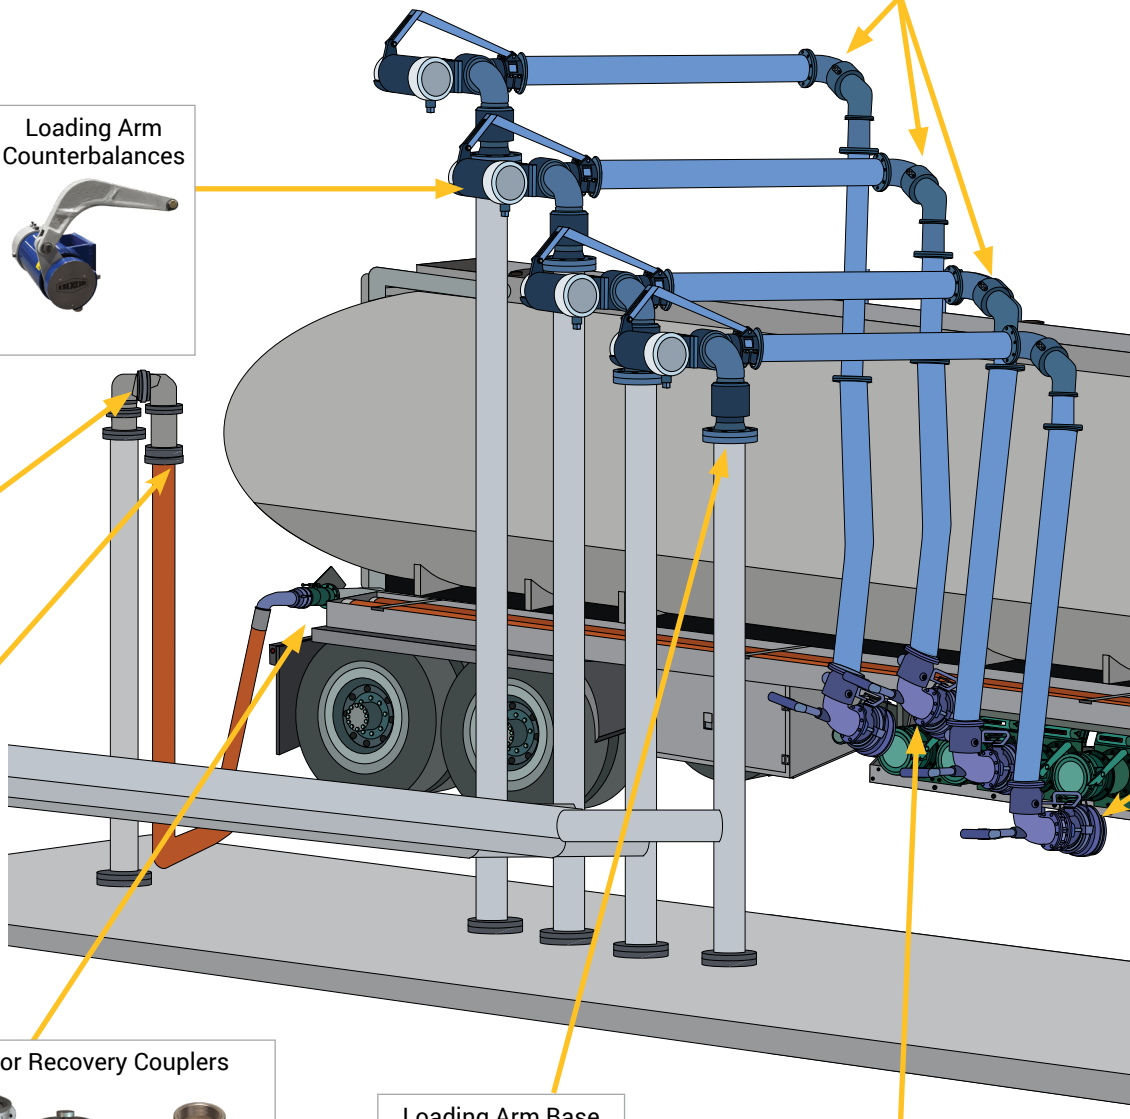

Swivels




Safety Break-aways




Vapor Recovery Couplers




Loading Arm Base Swivels



Loading Arm Swivels



Tank Truck: Bottom Loading/Unloading

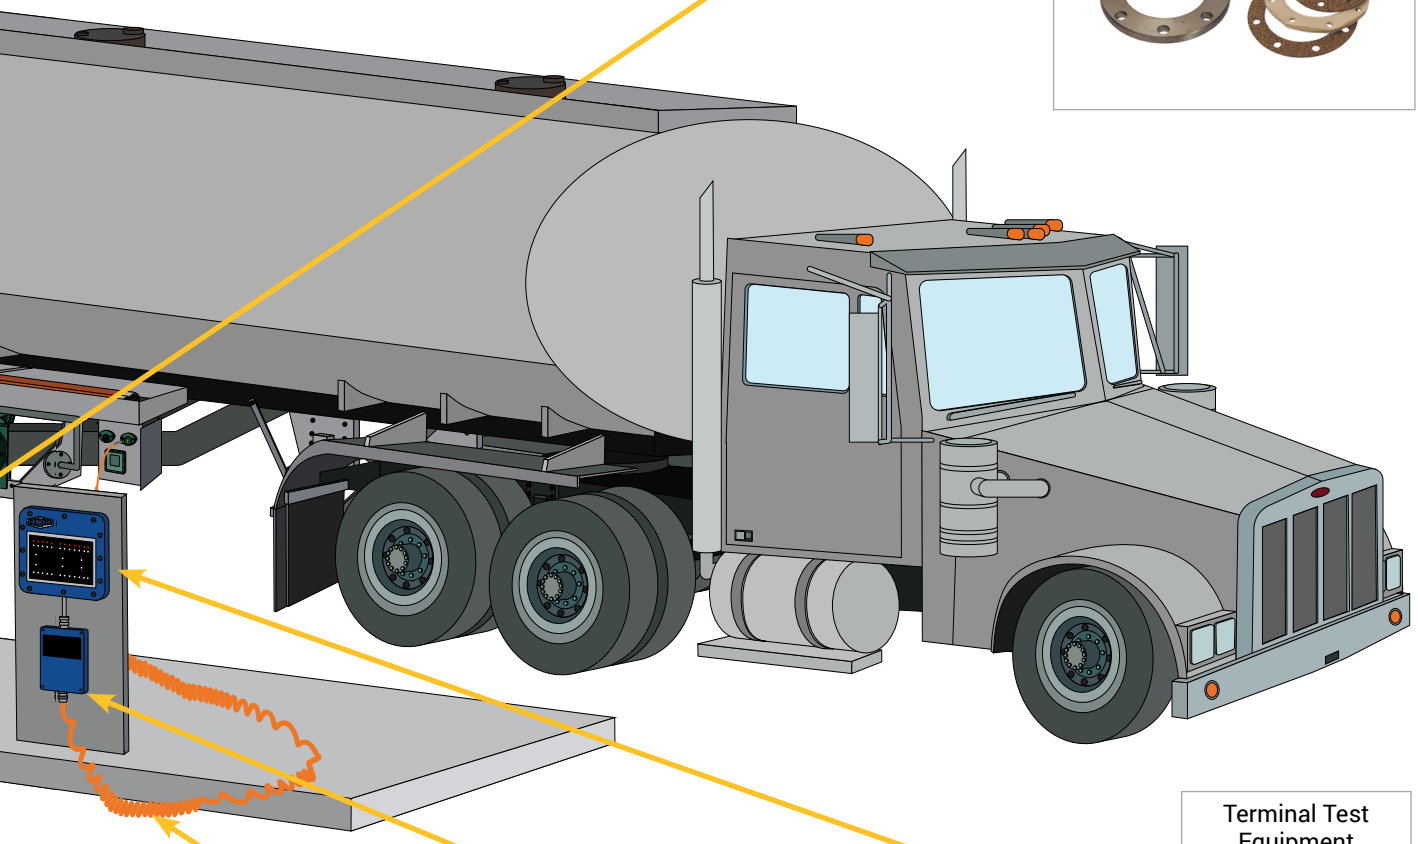

Sight Flow Indicators



TTMA Flanged Break-away Couplings



TTMA Flange Adapters



TTMA Flange Extensions



API Couplers



Flange Spacers and Gakets




API Optic and Thermistor Cord Assemblies



Junction Boxes




Rack Monitors




Terminal Test Equipment



Railcar: Top Loading

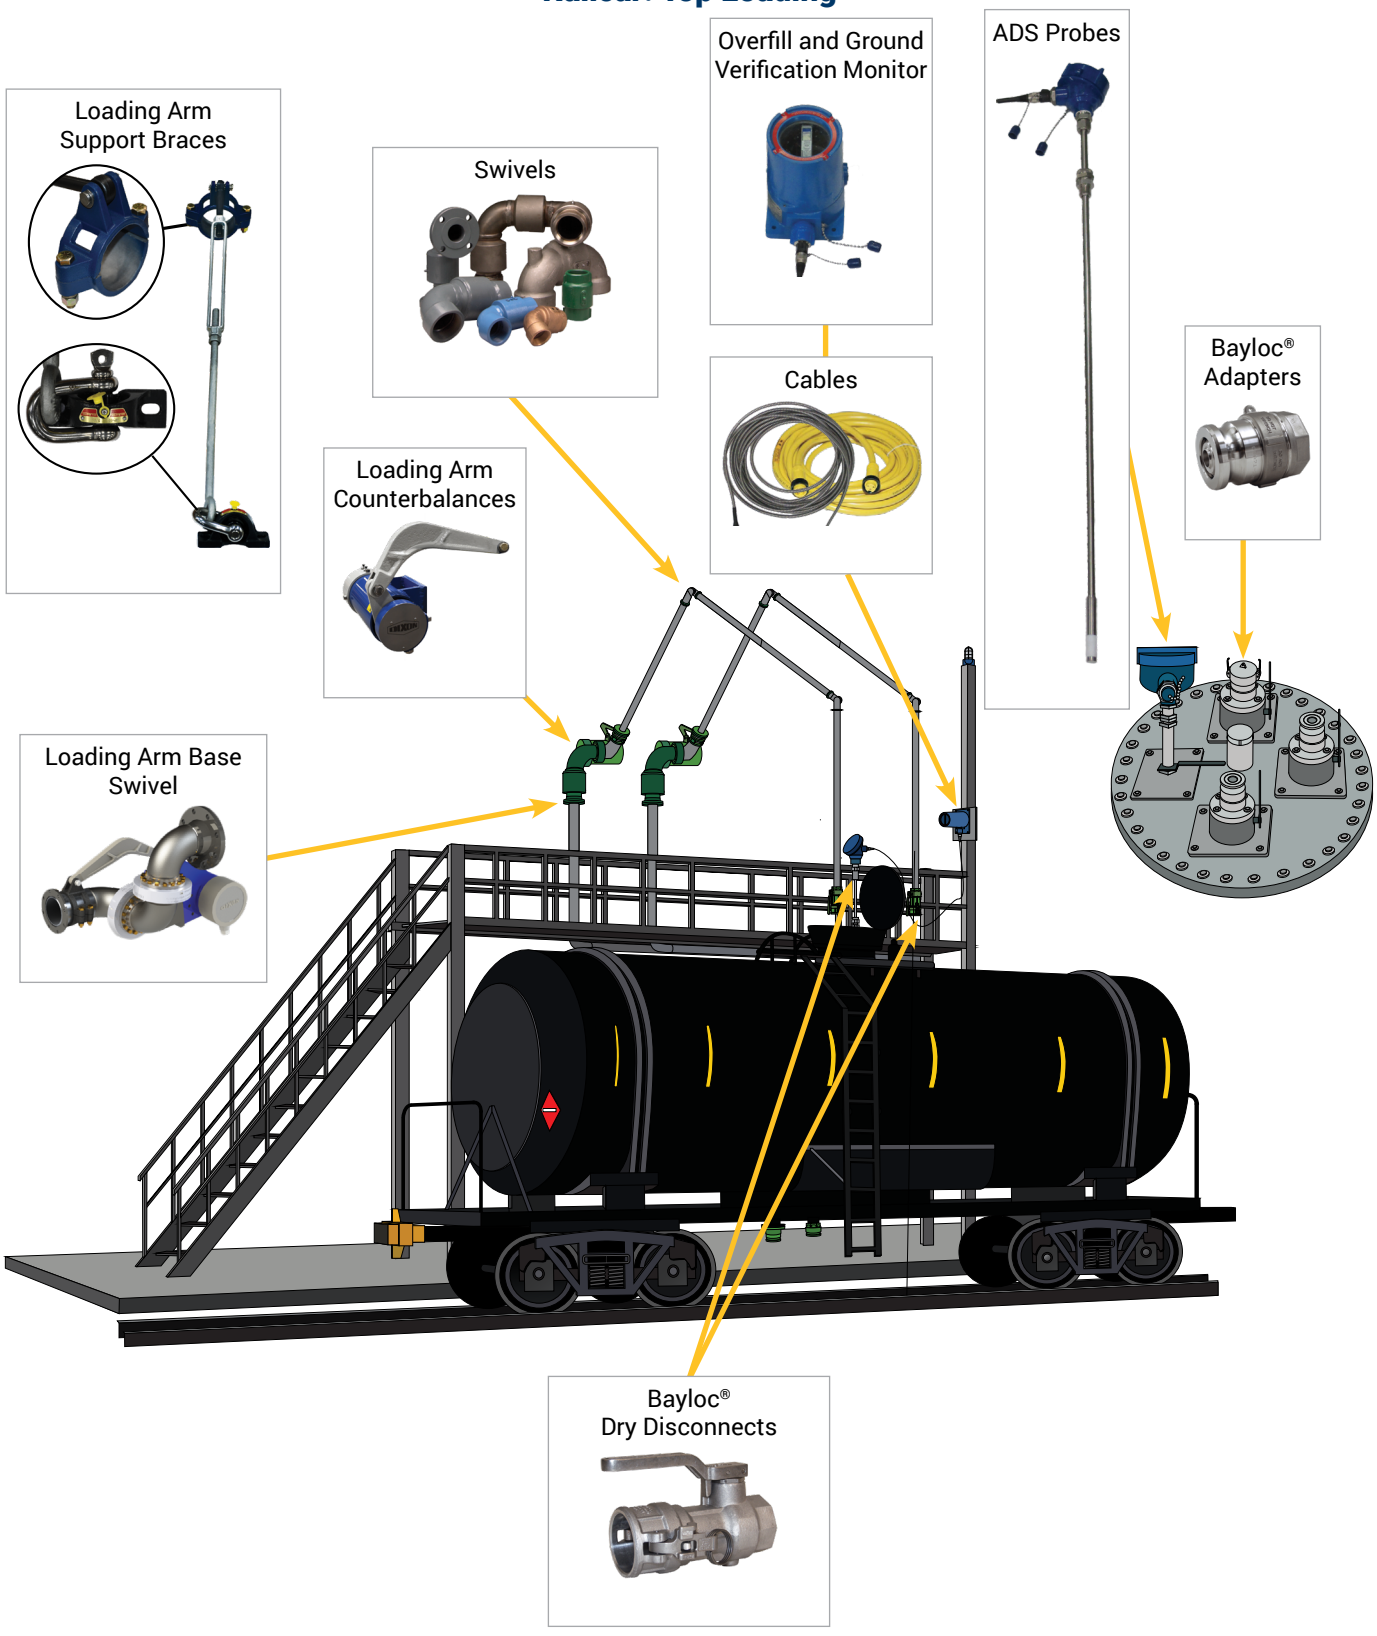

Tank Truck: Top Loading

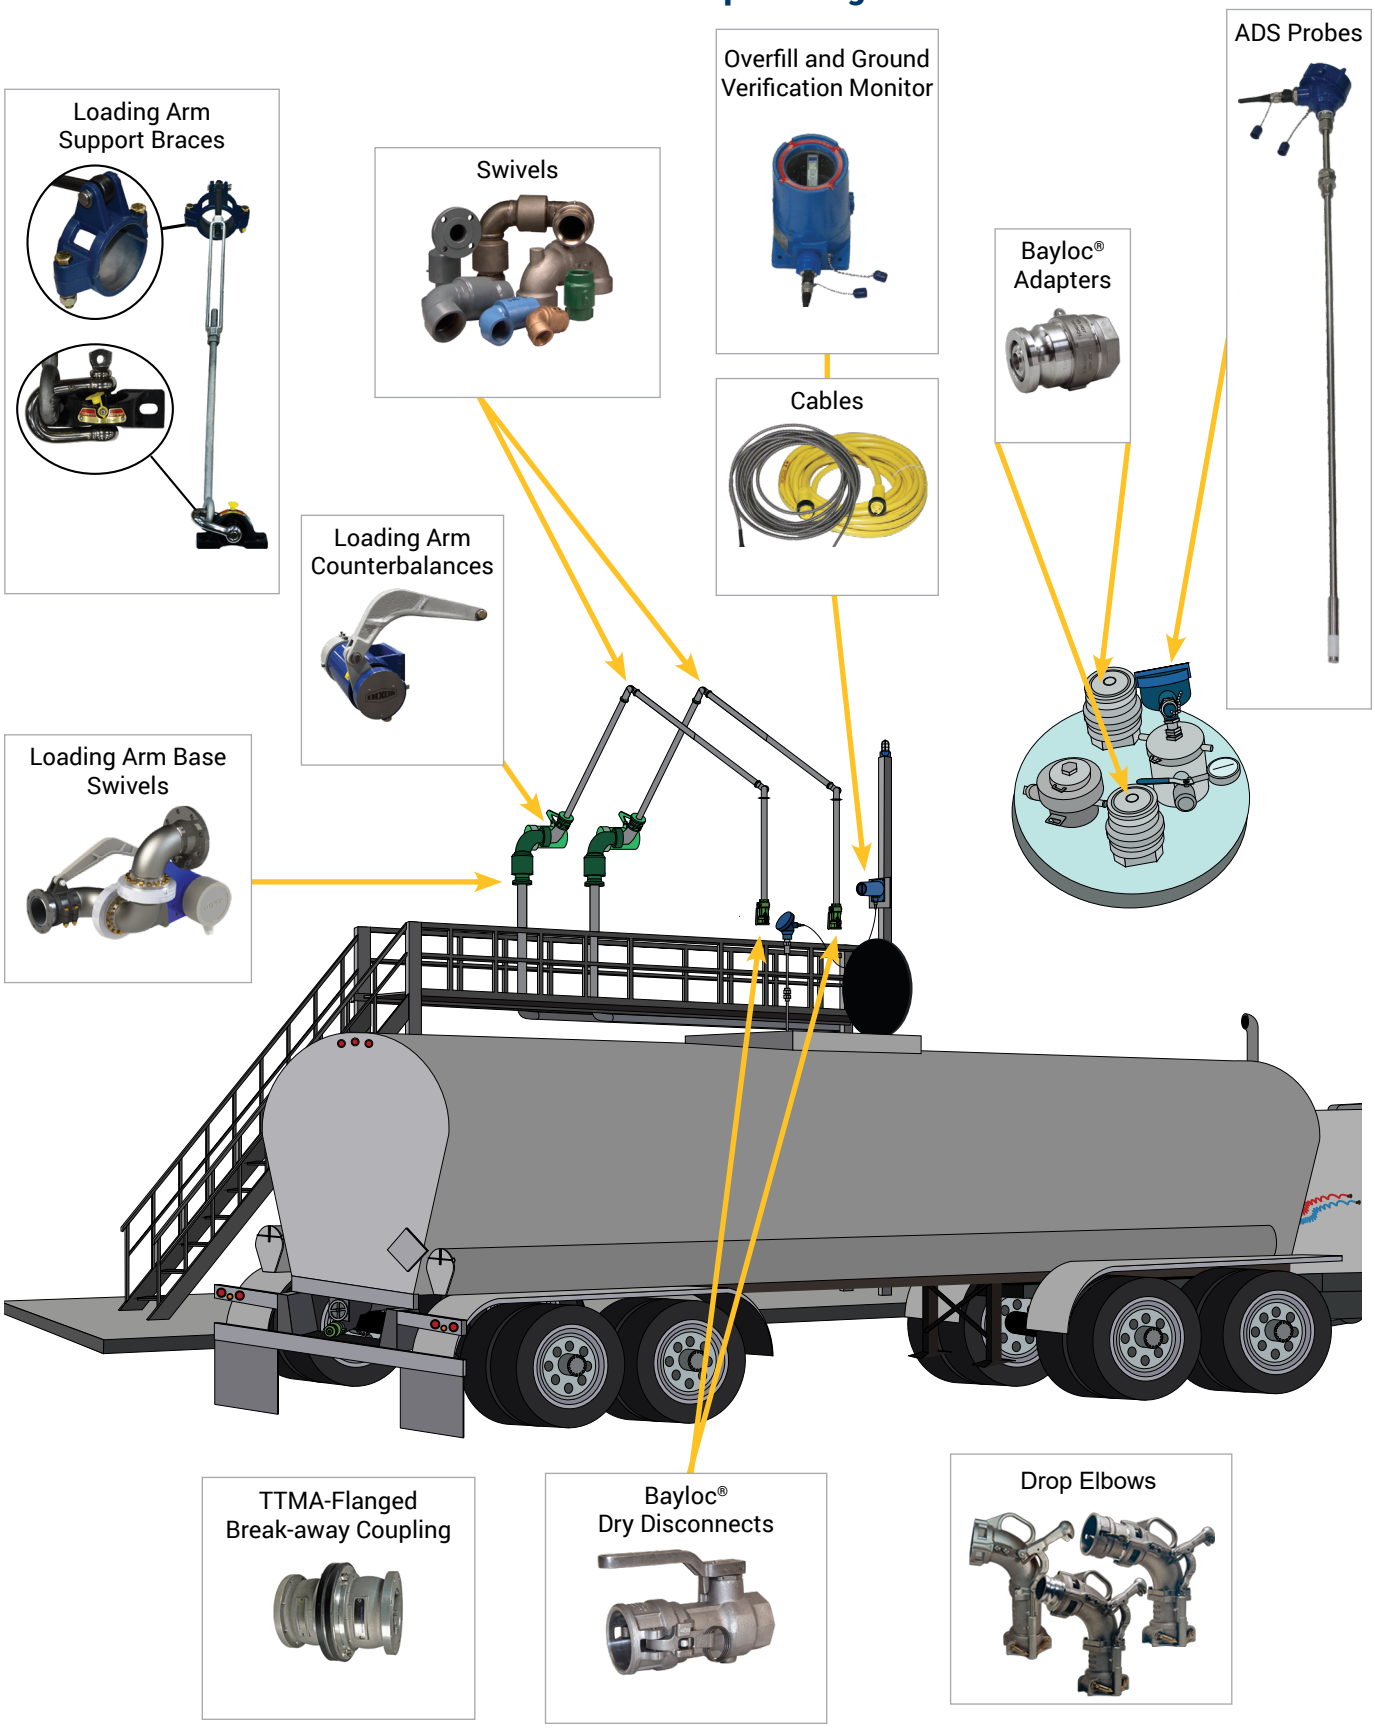

Hoses

Continental Flexwing® Petroleum Hose




Sizes	Temp Rating	Pressure Rating (psi) at 68°F	Vacuum Rating (hg) at 68°F	Bend Radius (in)	Weight (lbs)
1"	-35°F to 200°F	150	29	2	0.63
1-1/2"	-35°F to 200°F	150	29	4	0.99
2"	-35°F to 200°F	150	29	5	1.3
3"	-35°F to 200°F	150	29	7	2.03
4"	-35°F to 200°F	150	29	10	2.68

Continental Fabchem™ Chemical Hose



Sizes	Temp Rating	Pressure Rating (psi) at 68°F	Vacuum Rating (hg) at 68°F	Bend Radius (in)	Weight (lbs)
1"	-40°F to 212°F	200	29	4	0.6
1-1/2"	-40°F to 212°F	200	29	5	0.841
2"	-40°F to 212°F	200	29	6	1.22
3"	-40°F to 212°F	200	29	9	2.11

Kuriyama Tigerdrop™ Clear Drop Hose

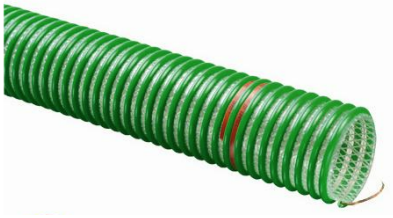

Sizes	Temp Rating	Pressure Rating (psi) at 68°F	Vacuum Rating (hg) at 68°F	Bend Radius (in)	Weight (lbs)
3"	-40°F to 140°F	70	29	6	1.2
4"	-40°F to 140°F	65	29	8	1.8

Pacific Echo Spiralite® 5100-00 Petroleum Tank Drop Hose with Static Wire




Sizes	Temp Rating	Pressure Rating (psi) at 68°F	Vacuum Rating (hg) at 68°F	Bend Radius (in)	Weight (lbs)
2"	-30°F to 130°F	100	29	4	0.87
2-1/2"	-30°F to 130°F	100	29	5	1.13
3"	-30°F to 130°F	65	29	6	1.71
4"	-30°F to 130°F	65	29	8	2.44

Kuriyama Tigervapor™ Vapor Recovery Hose



Sizes	Temp Rating	Pressure Rating (psi) at 68°F	Vacuum Rating (hg) at 68°F	Bend Radius (in)	Weight (lbs)
3"	-40°F to 140°F	11	12	3.5	0.78
4"	-40°F to 140°F	9	10	4.5	1.1

Chemiflex® Heavy Duty Polypropylene Composite Hose (Type PGP951)

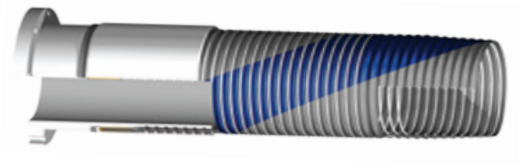

Sizes	Temp Rating	Pressure Rating (psi) at 68°F	Vacuum Rating (hg) at 68°F	Bend Radius (in)	Weight (lbs)
2"	-60°F to 212°F	250	29	6	1.5
3"	-60°F to 212°F	250	29	8	2.3
4"	-60°F to 212°F	200	29	13	3

*Other styles and configurations are available upon request.

Hose & Fittings

Hose Master MASTERFLEX™ AF4550 Metal Hose



Masterflex™ is Hose Master's close pitch metal hose. It is manufactured using the same high quality process used to make Annuflex™ hose, but the number of corrugations per foot is increased to allow for greater flexibility.

Sizes available: 1/4" - 6"

Tube Material Codes:	Braid Codes:
4 - T321 Stainless Steel	00- Unbraided
5- T316L Stainless Steel	50- T304 Single Braid
7- T304L Stainless Steel	55- T304 Double Braid
	*T316 Braid available upon request.


Cam & Groove Fittings
Aluminum and Stainless Steel



Type A



Type B



Type C




Type D



Type E



Type F



Dust Cap



Dust Plug

*Additional materials are available upon request.

amazon
HOSE & RUBBER COMPANY
a SunSource Company

One Call
Gets it All!



Orlando

4105 Seaboard Rd.
Orlando, FL 32808
Phone: 407.843.8190
Email: orlandosales@amazonhose.com

South Orlando

9961 Sidney Hayes Rd.
Orlando, FL 32824
Phone: 407.843.8190
Email: orlandosales@amazonhose.com

Tampa

1103 N 50th St.
Tampa, FL 33619
Phone: 813.223.7554
Email: tampasales@amazonhose.com

Miami

1001 NW 159th Dr.
Miami, FL 33169
Phone: 305.620.4313
Email: miamisales@amazonhose.com

Riviera Beach

6753 Garden Rd., #109
Riviera Beach, FL 33404
Phone: 561.844.3699
Email: rbsales@amazonhose.com

Orlando • South Orlando • Tampa • Miami • Riviera Beach