


## V-BELTS

As the manufacturer of the full line of power transmission belts, Continental offers a variety of friction-fit drive elements for wraparound drives in which slip is permissible. Wrapped V-belts for harsh ambient conditions, raw-edge V-belts for maximum power transmission and serpentine drives or variable-speed belts for variable transmission ratios – Continental V-belts are extremely smooth power transmission elements for an extensive range of applications.

Special, non-standard designs are available on request.

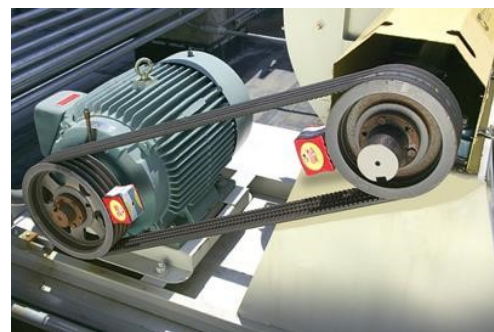


**CONTI® FHP**

2L, 3L, 4L, 5L Series



**CONTI® HEX**

AA, BB, CC, CCP Series

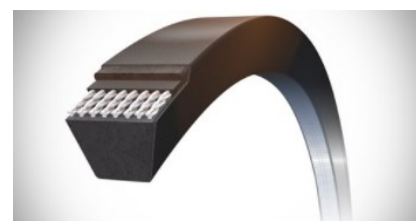

**CONTI® HY-T-PLUS**

A, B, C, D, E Series




**CONTI® TORQUE-FLEX**

AX, BX, CX Series



**CONTI® HY-T-WEDGE**

3VX, 3V, 5VX, 5V, 8VX, 8V Series

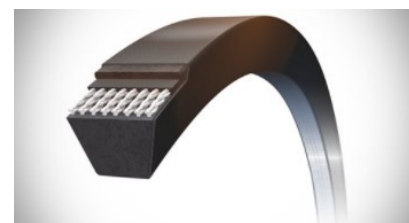

**CONTI® INSTA-POWER**

Aramid (Kevlar)  
83, 84, 85, 87 Series



**CONTI® TORQUE-TEAM-LAMINATED**

5VL Series



**CONTI® TORQUE-TEAM-PLUS**

Aramid (Kevlar) / Banded  
5VF, 8VF Series




**CONTI® HY-T TORQUE-TEAM CLASSICAL**

Banded  
BX, B, CX, C, D Series



**CONTI® HY-T WEDGE TORQUE-TEAM**

Banded  
3VX, 3V, 5VX, 5V, 8V Series

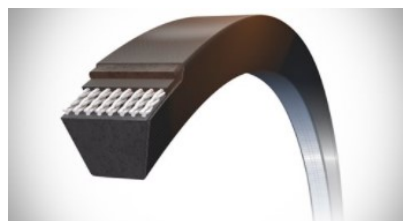

**CONTI® WEDGE-TLP**

3VT, 5VT, 8VT Series

**NEW  
PRODUCTS**

## SYNCHRONOUS BELTS

Maximum precision plus maintenance-free operation and efficiencies up to 99% – as the manufacturer of the full line of power transmission belts, Continental offers a comprehensive range of timing belts made of rubber and polyurethane. To ensure that it can cover all industrial requirements, the portfolio contains an extensive variety of synchronous drive elements ranging from belts for household applications to heavy-duty timing belts to replace chains or for the most extreme ambient conditions.

Special, non-standard designs are available on request.



**CONTI® FALCON PD**

Temp Rating up to 210°F Continuous  
Up to 300°F Intermittent  
8M, 14M Series



**CONTI® SILENTSYNC**

Temp Rating up to 200° Continuous  
8M, 14M Series



**CONTI® SYNCHROCHAIN CARBON**

Temp Rating up to 176°F  
Polyurethane / Carbon Cord  
8M, 14M Series



**CONTI® BLACKHAWK PD**

Universal Profile  
8M, 14M Series



**CONTI® HAWK PD**

Universal Profile  
3M, 5M, 8M, 14M, 20M Series



**CONTI® DUAL HI PERFORMANCE PD**

Double-Sided  
8M, 14M Series



**CONTI® POSITIVE DRIVE PD**

MXL, XL, L, H, XH, XXH Series



**CONTI® DUAL-POSITIVE-DRIVE**

Double-Sided  
XL, L, H Series

**One Call  
Gets it All!**